

MICHIGAN
DEPARTMENT OF TRANSPORTATION

SPECIAL PROVISION
FOR
REBUILDING MICHIGAN SIGNS

COS:LLR

1 of 5

APPR:MWB:MRB:05-12-22

FHWA:APPR:05-12-22

a. Description. This work consists of designing, furnishing, installing, maintaining, and removing temporary Rebuilding Michigan signs. Provide signing for all Rebuilding Michigan projects in accordance with section 812 of the Standard Specifications for Construction, unless otherwise directed herein or by the Department.

b. Materials. Ensure signing is in accordance with section 919 of the Standard Specifications of Construction. Reflective Sheeting will be in accordance with subsection 922.02.B of the Standard Specifications for Construction.

c. Construction. Fabrication of Rebuilding Michigan signs must conform to the sign layout details as shown in Detail 1 and Detail 2 of this special provision. Character fields on Detail 1, "INTERSTATE 496", "I-69 TO LANSING RD", and "FALL 2020" must reflect the actual characteristics of the Rebuilding Michigan financed portion of the job. For "INTERSTATE 496", fabricate on the sign the Rebuilding Michigan funded route symbol being improved as a part of this project as specified by the Engineer. For "I-69 TO LANSING RD" fabricate on the sign a crossroad name near the point of beginning and the point of ending of Rebuilding Michigan funded project as specified by the Engineer. For "FALL 2020" fabricate on the sign the season and year of the of the expected date of completion for the Rebuilding Michigan funded project as specified by the Engineer.

1. Install Rebuilding Michigan signs at locations as indicated on Figure 1 of this special provision for work zones in divided roadways.

2. Install Rebuilding Michigan signs at locations as indicated on Figure 2 of this special provision for work zones in undivided roadways.

d. Measurement and Payment. The completed work, as described, will be paid per the Standard Specifications for Construction using the following pay items:

Pay Item	Pay Unit
Rebuilding Michigan Signs, Type VA, Modified, Temp, Oper	Each
Rebuilding Michigan Signs, Type VA, Modified, Temp, Furn.....	Each

1. **Rebuilding Michigan Signs, Type VA, Modified, Temp, Oper** will be paid for as described in subsection 812.04.D of the Standard Specifications for Construction.

2. **Rebuilding Michigan Signs, Type VA, Modified, Temp, Furn** will be paid for as described in subsection 812.04.C of the Standard Specifications for Construction.



3.0" Radius, 1.0" Border, White on, Green;


"DRIVE WITH CARE", ClearviewHwy-2-W;

"AS WE FIX", ClearviewHwy-2-W; "I-69 TO", ClearviewHwy-3-W;

"LANSING RD", ClearviewHwy-3-W;

"COMPLETE FALL 2020", ClearviewHwy-1-W;

Detail 1: Rebuilding Michigan Sign Detail



Detail 2: Funding Costs Plaque Detail

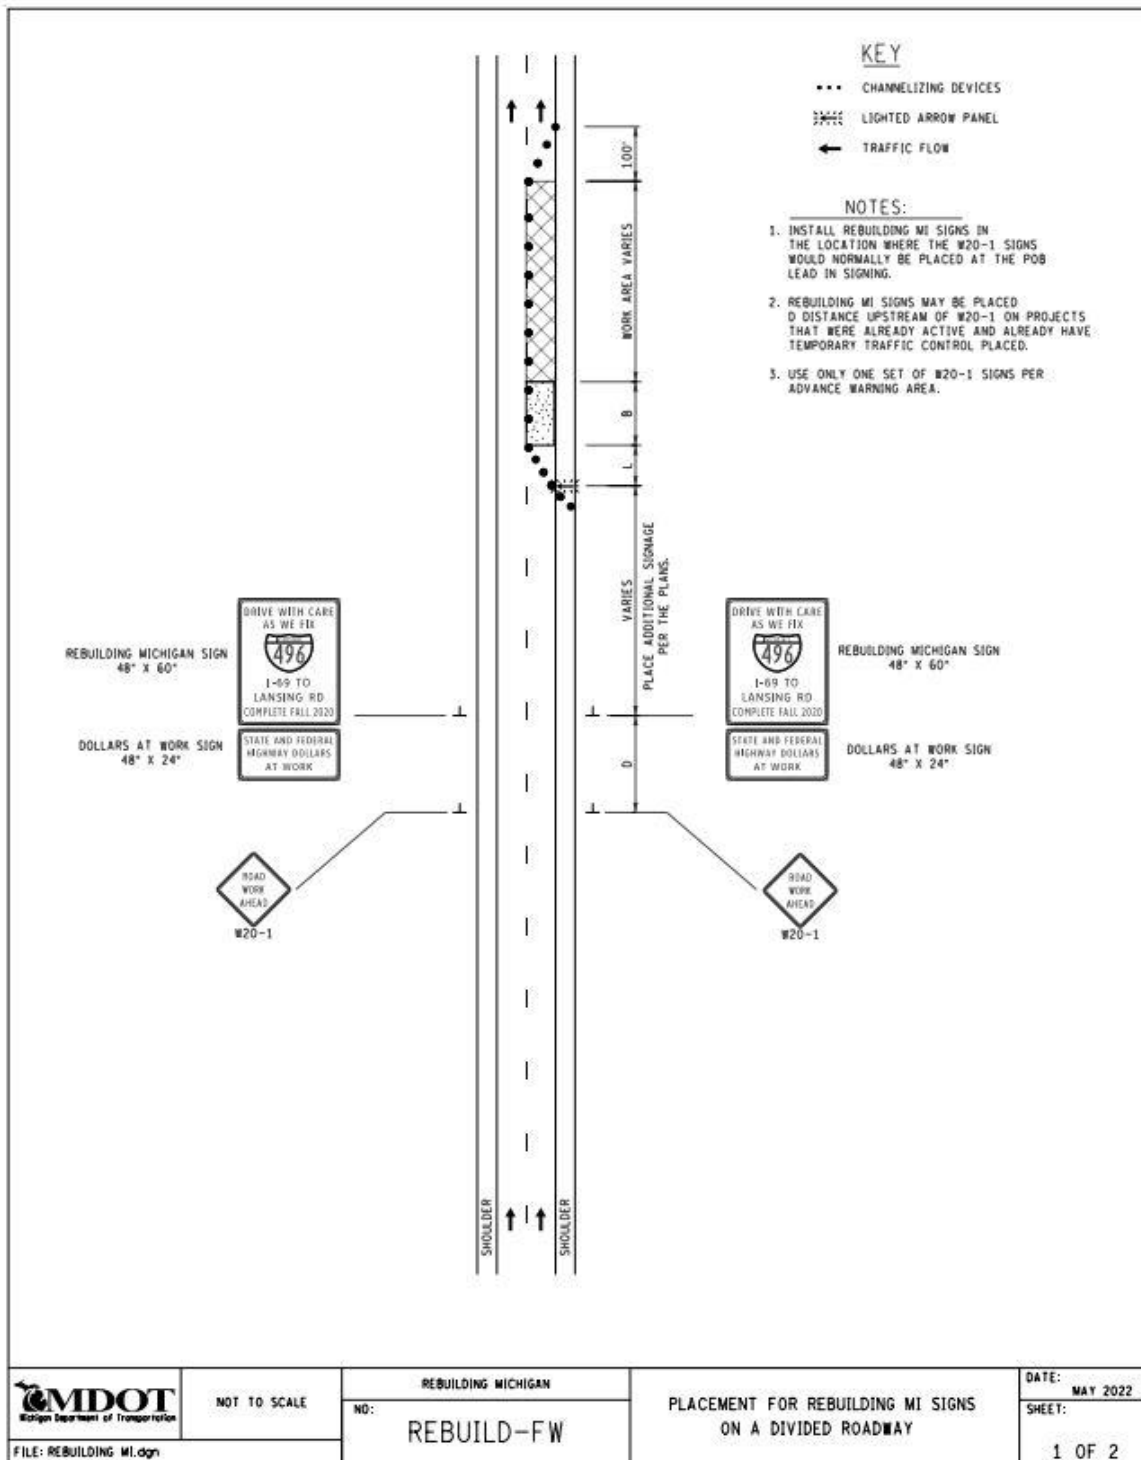


Figure 1: Detail for Placement for Rebuilding Michigan Signs and Plaques on Divided Roadways

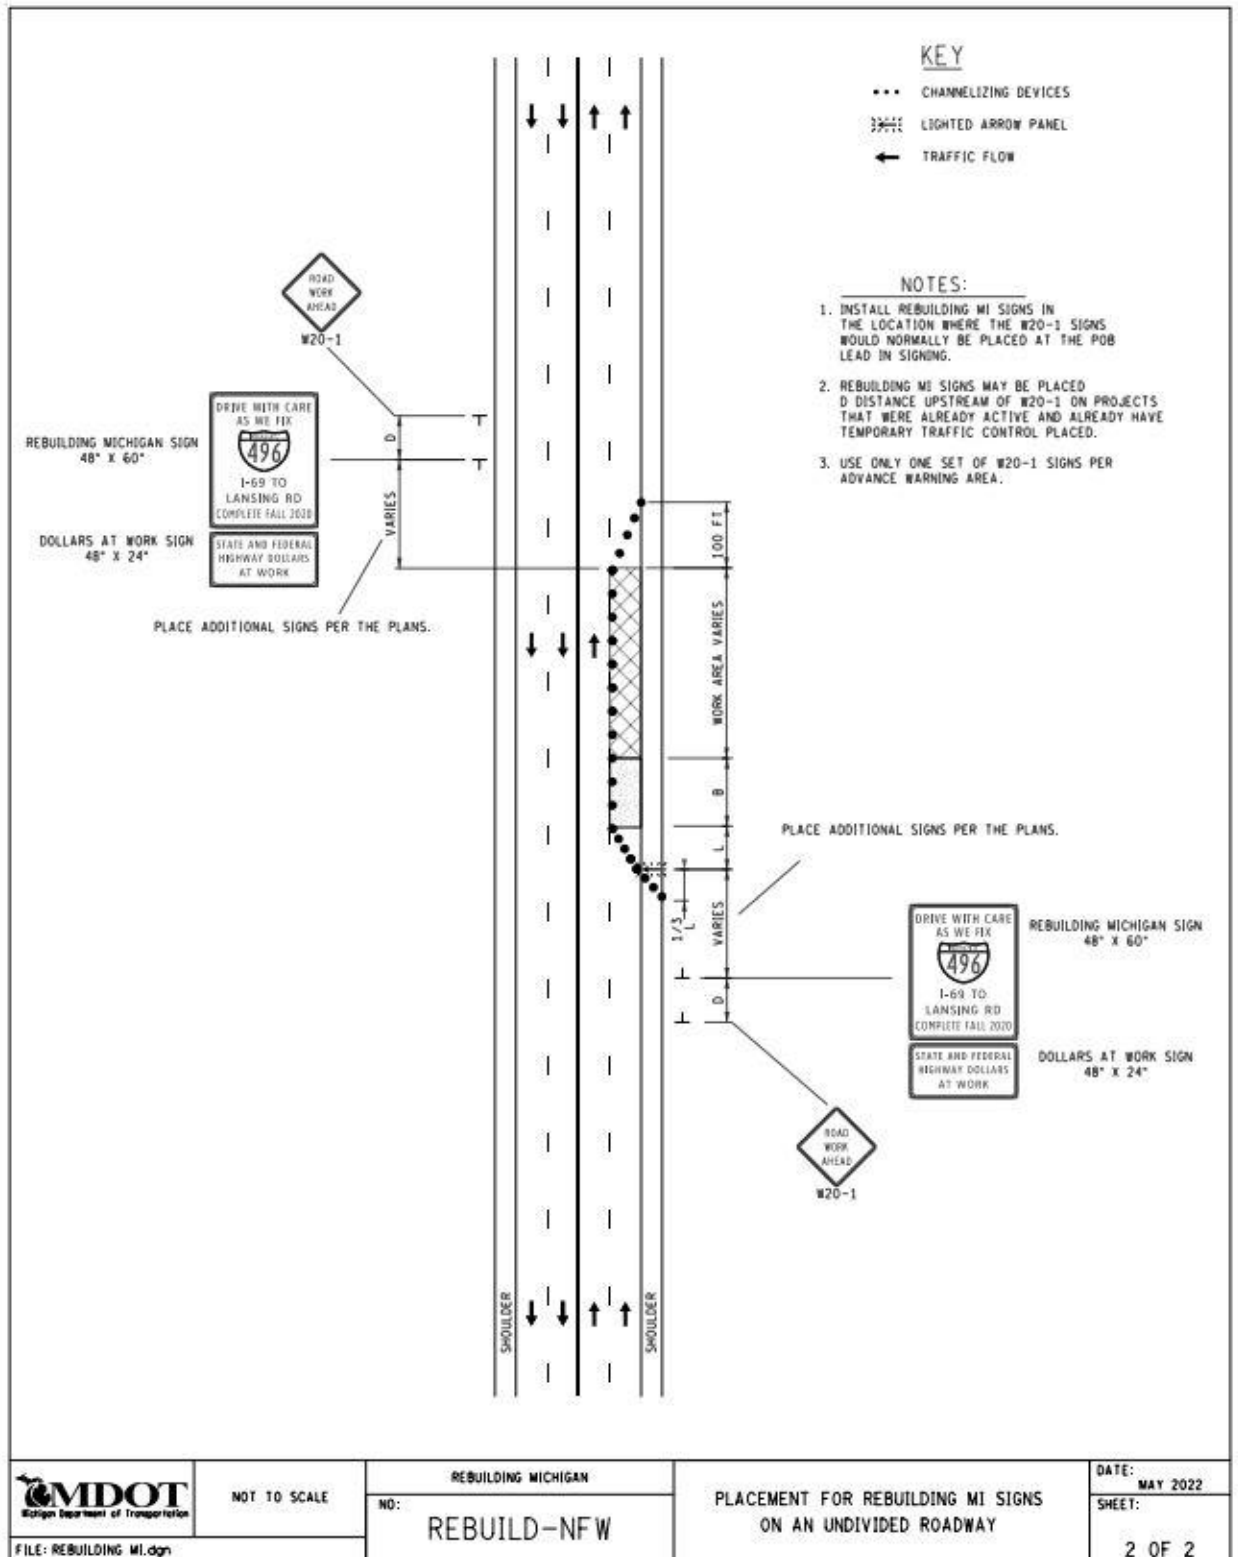


Figure 2: Detail for Placement for Rebuilding Michigan Signs and Plaques on Undivided Roadways