

Evaluating the Performance and Safety Effectiveness of Roundabouts

The Michigan Department of Transportation



Opus International Consultants Inc.
6230 Orchard Lake Road, Suite 110
West Bloomfield, MI 48322

Contact: Jeff Bagdade, PE – Vice President
T: 248 539 2222 F: 248 539 3670
E: Jeffrey.Bagdade@opusinternational.com

www.opusinternational.com

December 2011





RESEARCH REPORT:

Evaluating the Performance and Safety Effectiveness of Roundabouts

FINAL REPORT

Opus International Consultants Inc.

Prepared by:

Kiel McIntosh
Transportation Engineer

Under the Direction of:

Cynthia Redinger, PE, PTOE
Senior Transportation Engineer

And

Jeffrey Bagdade, PE
Vice President

December 2011

OR 09083 (H-U0316.02)

6230 Orchard Lake Road
Suite 110
West Bloomfield, MI 48322

Tel: 248 539 2222
Fax: 248 539 3670
www.opusinternational.com

1. Report No. RC-1566	2. Government Accession No. N/A	3. MDOT Project Manager Dean Kanitz	
4. Title and Subtitle Evaluating the Performance and Safety Effectiveness of Roundabouts		5. Report Date December, 2011	
		6. Performing Organization Code N/A	
7. Author(s) Jeffrey Bagdade, Bhagwant N. Persaud, Kiel McIntosh, Joyce Yassin, Craig A. Lyon, Cynthia Redinger, Jason Whitten and Wesley A. Butch		8. Performing Org. Report No. H-U0316.02	
9. Performing Organization Name and Address Opus International Consultants Inc. 6230 Orchard Lake Road, Suite 110 West Bloomfield, MI 48322 Tel: (248) 539-2222, Fax: (248) 539-3670		10. Work Unit No. (TRAIS) N/A	
		11. Contract No. 2010-0278	
		11(a). Authorization No. Z2	
12. Sponsoring Agency Name and Address Michigan Department of Transportation Murray Van Wagoner Building 425 West Ottawa, P.O. Box 30050 Lansing, MI 48909 Tel: (517) 241-2780, Fax: (517) 335-2785		13. Type of Report & Period Covered Annual Report 10/1/2010 to 12/31/2011	
		14. Sponsoring Agency Code N/A	
15. Supplementary Notes			
16. Abstract This report documents the evaluation of the performance and safety effectiveness of roundabouts within the State of Michigan. The study began with the identification of roundabouts within Michigan. This was followed by collecting data on the geometric features of the roundabouts and crash history for each roundabout site from January 1, 2001 to December 31, 2010. The analysis of the roundabouts within Michigan included a literature review, a best practices review of other municipalities, an evaluation of the crash data (both a simple before and after and an Empirical Bayes (EB) analysis, and a site visit to a select group of roundabouts that was determined by the study team. The site visits included a speed study at several of the locations, a conflict analysis at several of the locations, and an assessment of overall operations of the roundabout, including noting any potential issues that may be observed from the operations of the roundabouts. Another finding of the analysis was an average cost savings that the various types of roundabouts are expected to have based on savings the reduction in delay and crash reduction. Additional findings from the site visits resulted in a rating of issues based on <i>Collision Risk Assessment Method</i> . Based upon the results of the EB analysis, Safety Performance Functions (SPFs) and Crash Modification Factors (CMFs) were established to reflect the roundabouts in Michigan. These are the first SPFs and CMFs that were developed to reflect the behaviors of Michigan roundabouts.			
17. Key Words Accident severity, Roundabouts, Highway operations, Truck traffic, Geometric design, Highway design, Highway safety, Traffic Crashes		18. Distribution Statement No restrictions. This document is available to the public through the Michigan Department of Transportation.	
19. Security Classification – report Unclassified	20. Security Classification – page Unclassified	21. No. of Pages 97	22. Price N/A

Table of Contents

Executive Summary	v
1.0 Introduction	1-1
1.1 Background Information.....	1-1
1.2 Scope and Study Objectives.....	1-1
1.3 Methodology	1-4
2.0 Literature Review	2-1
2.1 Safety Impacts of Roundabout Implementation	2-1
2.1.1 Driver Safety	2-1
2.1.2 Pedestrian Safety	2-3
2.1.3 Bicyclist Safety	2-5
2.2 Operational Characteristics of Roundabouts.....	2-6
2.3 Pedestrian, Bicyclist, and Driver Behavior in Roundabouts	2-8
2.3.1 Pedestrian Behavior.....	2-8
2.3.2 Bicyclist Behavior	2-8
2.3.3 Driver Behavior	2-9
2.4 Truck Maneuvers in Roundabouts.....	2-10
2.5 Traffic Control Devices within Roundabouts	2-11
2.6 Costs.....	2-12
2.7 Winter Operations.....	2-13
3.0 Best Practices Review	3-1
4.0 Field Data Collection	4-1
4.1 Identify Roundabouts	4-1
4.2 Site Visits.....	4-3
4.3 Collect Operational Data.....	4-10
4.4 Collect Conflict Data	4-12
5.0 Additional Data Collection	5-1
5.1 Data Requirements.....	5-1
6.0 Safety Analyses	6-1
6.1 Simple Before and After Analysis.....	6-1
6.2 Detailed Crash Statistics	6-3
6.3 Empirical Bayes Analysis to Develop Crash Reduction Factors	6-8
6.3.1 Data Collection.....	6-9
6.3.2 Development of Reference Group SPFs and Yearly Calibration Factors	6-12
6.3.3 “Before”-“After” Study Results and Discussion.....	6-14
6.4 Development of Safety Performance Functions.....	6-16
6.4.1 Estimating Roundabout Conversion Benefits.....	6-17
6.5 Operational Impacts of Roundabouts.....	6-21
6.6 Economic Analysis.....	6-22
7.0 Conclusion	7-1
7.1 Identifying and Rating the Issues.....	7-2
7.2 Recommendations for Further Research.....	7-7
7.3 Recommendations for Implementation	7-8
8.0 List of References	8-1
Appendix	

List of Figures

Figure 2.1: Roundabout Conflict Points.....	2-2
Figure 2.2: Chance of Pedestrian Fatality if Hit by a Motor Vehicle.....	2-4
Figure 2.3: Roundabout Safety Features	2-9
Figure 2.4: Evaluation of Driver Behavior at HAWK Signals	2-10
Figure 2.5: Right-of-way Requirements for Roundabouts and Signalized Intersections	2-12
Figure 4.1: NB M-53 Ramps at 26 Mile Road Speed Study.....	4-11
Figure 6.1: Single and Double Lane Roundabout “Before” and “After” Crash Severity.....	6-3
Figure 6.2: Single and Double Lane Roundabout “Before” and “After” Crash Type	6-4
Figure 6.3: Single and Double Lane Roundabout “Before” and “After” Crash Lighting Conditions.....	6-5
Figure 6.4: Triple Lane Roundabout “Before” and “After” Crash Severity.....	6-6
Figure 6.5: Triple Lane Roundabout “Before” and “After” Crash Type	6-7
Figure 6.6: Triple Lane Roundabout “Before” and “After” Crash Lighting Conditions.....	6-8
Figure 7.1: WB M-14 at Maple	7-5
Figure 7.2: WB departing at Maple Rd and Drake Rd.....	7-6
Figure 7.3: Indirect left turn utilizing roundabouts	7-7

List of Tables

Table 1.1: Crash Frequency	1-3
Table 1.2: Crash Severity	1-3
Table 1.3: Crash Risk Assessment	1-3
Table 2.1: Pedestrian Crashes for Various Intersection Types	2-3
Table 2.2: Crash Modification Factors for Roundabout Bicycle Facility Designs.....	2-5
Table 2.3: Approximate Peak Hour Capacity for Roundabouts.....	2-7
Table 2.4: Typical Daily Service Volumes for 4-Leg Roundabouts.....	2-7
Table 2.5: Level of Service Criteria at Roundabout Intersections	2-7
Table 4.1: Roundabouts Selected for Final Analysis	4-1
Table 4.2: Roundabout Spot Speed Study	4-11
Table 6.1: Simple Comparison of Average Annual Crash Rates Before and After Conversion	6-1
Table 6.2: Single and Double Lane Roundabout Crash Severity Values	6-3
Table 6.3: Single and Double Lane Roundabout Crash Type Values	6-4
Table 6.4: Single and Double Lane Roundabout Crash Lighting Condition Values	6-5
Table 6.5: Triple Lane Roundabout Crash Severity Values	6-6
Table 6.6: Triple Lane Roundabout Crash Type Values	6-7
Table 6.7: Triple Lane Roundabout Crash Lighting Condition Values	6-8
Table 6.8: Locations Used for Empirical Bayes Analysis	6-9
Table 6.9: Summary Statistics for Selected Treatment Sites.....	6-10
Table 6.10: Summary Statistics for 110 Reference Sites	6-11
Table 6.11: Summary Statistics for 48 as Roundabout Sites	6-11
Table 6.12: SafetyAnalyst Models for Intersections.....	6-13
Table 6.13: Calibration Factors and Re-estimated Overdispersion Parameters	6-13
Table 6.14: Yearly Multipliers	6-14
Table 6.15: Results from the Empirical Bayes “Before”-“After” Analysis	6-15
Table 6.16: Naïve “Before”-“After” Study Results.....	6-15
Table 6.17: Models for Roundabouts	6-17
Table 6.18: AM Peak Period Delay and Level of Service	6-21
Table 6.19: PM Peak Period Delay and Level of Service.....	6-22
Table 6.20: Calculation of Cost per Fatal/Injury Crash	6-23
Table 6.21: Benefit Analysis Resulted from Crash Reduction	6-23
Table 6.22: Estimated Benefit From Stop Delay Savings.....	6-25
Table 6.23: Roundabouts Construction Cost	6-25
Table 6.24: Roundabout Time of Return by Roundabout Type	6-26
Table 7.1 Identification and Rating of Issues.....	7-3
Table 7.2: Summary for Recommended Revisions to the MDOT Roundabout Guide	7-10

Executive Summary

This report evaluated the performance and safety effectiveness of the roundabouts within Michigan. Throughout the report, crash data, operational data, and geometric data were collected for both before construction time period and the after time period between January 1, 2001 and December 31, 2010. In addition to collecting data about the roundabouts throughout Michigan, site visits were conducted in order to identify possible issues that any of the roundabouts may experience.

The crash data was analyzed utilizing both a simple before-after analysis and the Empirical Bayes (EB) methodology. The purpose of the simple before and after methodology was to analyze the data from a high level, providing trends and an overview of the data. The EB analysis was used to conduct a more in depth before-after analysis that was utilized to evaluate the effect that the roundabout installation had on the intersection.

The EB analysis was utilized to develop Crash Modification Factors (CMFs) and Safety Performance Functions (SPFs) for the various intersection types. The results of the EB analysis can be seen below:

Site Type by Condition before conversion	CMF	
	All	Injury
All sites	1.346	0.583
All sites minus triple lane	1.002	0.488
One or two way Stop-controlled (All)	1.117	0.558
One or two way stop controlled at interchange	1.247	0.419
One or two way stop controlled not at interchange	1.095	0.581
All-way stop-controlled	1.026	0.636
Signalized (minus triple lane)	0.783	0.300
Signalized to 3 lane roundabout	1.975	0.801

Safety Performance Functions:

$$\text{Crashes/year} = \exp^{\alpha}(\text{AADT})^{\beta_1} \exp(\beta_2 * \text{Type} + \text{IC} * \beta_3)$$

where,

AADT = total entering AADT

Type = 1 if 1 circulating lane; 0 otherwise

IC = 1 if located at an interchange; 0 otherwise

Model	α	β_1	β_2	β_3	k
Total	1 lane -4.5958	0.5253	-0.7884	0.6988	0.4839
	2 lane -3.8074				
Injury	1 lane -6.4109	0.4788	-0.6822	0.7850	0.2460
	2 lane -5.7287				

As previously stated, in addition to conducting a simple before-after analysis and an EB analysis, site visits were conducted to several roundabout locations in order to identify possible issues that the roundabout may experience. The results of the site visits are summarized below:

Safety Issue	Expected Crash Type	Expected Frequency	Expected Severity	Risk Rating
Lane discipline within multi-lane roundabouts	Sideswipe	Occasional	Low	B
Approach vehicles failure to yield	Sideswipe	Occasional	Low	B
Speeding within the circulatory roadway of a roundabout	Sideswipe	Occasional	Moderate	C
Vehicles yielding within the circulatory roadway	Rear-end	Rare	Low	A
“Tear Drop” approaches ignoring yield signs	Sideswipe	Rare	Moderate	B
Merging upon leaving circulatory roadway of multi-lane roundabouts	Pedestrian	Rare	Extreme	C
Left turns out of businesses at roundabouts	Angle and Rear-end	Infrequent	Moderate	B

1.0 Introduction

1.1 Background Information

The modern roundabout is a type of intersection that indirectly provides traffic control without the use of stop signs or traffic signals. These roundabouts, if properly designed, can provide safety and traffic flow benefits when compared to stop controlled and signal controlled intersections. Due to the safety and operational benefits that roundabouts provide, they have become increasingly popular in the United States in recent years. This increase in roundabout construction has prompted an increase in research regarding roundabout effectiveness and how they affect the various aspects of transportation systems.

1.2 Scope and Study Objectives

The objectives of this study are to determine the impact on crashes at locations where roundabouts have been installed in Michigan, to observe roundabout operations including truck maneuvers, and to identify the key geometric configurations and site characteristics that influence safety, performance and return on investment. With the emphasis on Michigan-specific locations and climate conditions, the study will provide the Michigan Department of Transportation (MDOT) with information on the cost, effectiveness and performance of roundabouts to support budget and design decision making and to support communication efforts with local communities about the expected benefits of new roundabouts. Elaboration of our understanding of each objective follows.

Objective 1: Determine the impact on crashes at locations where roundabouts have been installed

Meeting this objective would require undertaking a statistically rigorous observational “before”-“after” study that places some special requirements on the data collection and analysis tasks. These are:

- The need to acquire a large enough sample size to detect, with statistical significance, what may be small changes in safety for some geometric configuration and site characteristic subsets.
- The need to properly account for traffic volume changes that will result directly from this treatment and from natural temporal fluctuations. (Some roundabouts in other States have been known to have had traffic volume increases as large as 50%.)
- The need to properly account for other factors affecting crash frequencies not associated with roundabout construction, such as weather and other road safety programs.
- The need to properly account for the possible effects of regression to the mean (RTM) that may result from sites with high collision frequencies being directly or indirectly selected for conversion to roundabouts. (Improving sites with high collision frequencies is sound engineering practice, but research has conclusively shown that RTM effects are non-trivial and, if not accounted for, can cause treatment effects to be significantly overestimated.)

Objective 2: Observe roundabout operations including truck maneuvers

The requirement to determine the impact on motorist delay of the conversions will be calculated using the empirical models embedded within RODEL. Before traffic operational and geometric data to determine the level of service and delay in the “before” period will be gathered. This data will be compared to the operational characteristics of the implemented roundabout to determine the change in delay. Truck maneuvers will be observed using the Road Safety Audit (RSA) methodology.

Objective 3: Identify the key geometric configurations and site characteristics that influence safety, performance and return on investment

Utilizing the RSA methodology, key geometric, operational, road user and environmental site characteristics that influence safety and performance will be identified. A multi-disciplinary team will observe road user behavior through a review of crash, conflict, human factors and other surrogate measures. This information will be analyzed using the *Collision Risk Assessment Method*. The expected frequency and severity of crashes caused by each safety issue have been identified and rated according to the categories shown in Table 1.1 and Table 1.2. These two risk elements were then combined to obtain a risk assessment on the basis of the matrix shown in Table 1.3. Consequently, each safety issue is assessed on the basis of a ranking between F (highest risk and highest priority) and A (lowest risk and lowest priority). For each safety issue identified, possible mitigation measures have been suggested.

MDOT's return on investment for its roundabout implementation program will be calculated using the safety and operational data. This will help MDOT senior management determine the overall effects of roundabouts in Michigan and how future roundabout projects should be addressed in the future.

Table 1.1: Crash Frequency

Estimated		Expected Crash Frequency (per audit item)	Frequency Rating
Exposure	Probability		
High	High	10 or more crashes per year	Frequent
Medium	High		
High	Medium	1 to 9 crashes per year	Occasional
Medium	Medium		
Low	High		
High	Low	Less than 1 crash per year, but more than 1 crash every 5 years	Infrequent
Low	Medium		
Medium	Low	Less than 1 crash every 5 years	Rare
Low	Low		

Table 1.2: Crash Severity

Typical Crashes Expected (per audit item)	Expected Crash Severity	Severity Rating
Crashes involving high speeds or heavy vehicles, pedestrians, or bicycles	Probable fatality or incapacitating injury	Extreme
Crashes involving medium to high speed; head-on, crossing, or off-road crashes	Moderate to severe injury	High
Crashes involving medium to low speeds; left-turn and right-turn crashes	Minor to moderate injury	Moderate
Crashes involving low to medium speeds; rear-end or sideswipe crashes	Property damage only or minor injury	Low

Table 1.3: Crash Risk Assessment

Frequency Rating	Severity Rating			
	Low	Moderate	High	Extreme
Frequent	C	D	E	F
Occasional	B	C	D	E
Infrequent	A	B	C	D
Rare	A	A	B	C

Crash Risk Rankings A: minimal risk level D: significant risk level
 B: low risk level E: high risk level
 C: moderate risk level F: extreme risk level

1.3 Methodology

To accomplish the objectives of the study, four phases were developed. The four phases are presented in the following sections.

Phase 1 – Literature and Best Practice Review

Task 1.1: Conduct Initial Meeting

In this task the project team along with relevant MDOT and Federal Highway Administration (FHWA) staff held an initial meeting in order to discuss contractual obligations, work plan, deliverables, project milestones, schedules and appropriate procedures and policies.

Task 1.2: Literature Review

The project team conducted a literature review related to the implementation of roundabouts. Industry-standard reference guides, recent conference proceedings, journal publications, the internet, libraries, and discussions with various road agency staff were included in the search. The project team attempted to find out why there was a need for a roundabout, as well as when, where and how they were successfully applied.

Task 1.3: Best Practices Review

The project team also investigated best practices related to roundabouts (including indirectly related issues, such as operations, geometric design, maintenance, guidelines, and/or strategies). The best practices were reviewed for other state departments of transportation as well as county and municipal road agencies which the project team has relationships with and those agencies have the reputation for being “progressive” in the area of implementing roundabouts. The project team compared the guidelines and best practices that are documented during Task 1.2 and Task 1.3 to existing MDOT practices.

Phase 2 – Field Data Collection

Task 2.1: Identify Roundabouts

During this task, the project team prepared the criteria and rationale for the identification of intersections to evaluate. The project team contacted MDOT Region and various TSC traffic engineers to determine if any roundabouts have been completed in their regions. Additionally, various cities and county road commissions around the state were contacted to determine if any roundabouts have been applied on their roadways. All of the information collected was verified using web aerial photographs from agencies such as Southeast Michigan Council of Governments (SEMCOG). This information was used to prepare the final list of roundabouts that were evaluated as part of this project.

Task 2.2: Site Visit

Once the roundabouts had been identified, a group of roundabouts were selected that best represented the various forms of roundabouts. The site visits to the roundabouts were completed by a multi-disciplinary team. The multi-disciplinary team included experts in the following areas: road safety, traffic operations, geometric design, non-motorized road users, trucks, and enforcement.

Task 2.3: Collect Operational Data

The project team worked with the MDOT Regions and Transportation Service Centers (TSCs) to collect traffic count and other operational data. Operational data including turning movement counts (for both vehicles and non-motorized road users) and average daily traffic (ADT) counts were collected. Speed studies to determine 85th percentile speeds along the approaching roadways were also conducted.

Task 2.4: Collect Conflict Data

The project team collected conflict data at select sites as determined in conjunction with MDOT. Traffic conflicts are “near misses” that occur when two or more road users approach each other in time and space, and one road user takes evasive action to avoid a collision. Traffic conflicts are much more common than traffic collisions and are proposed to be used as a key surrogate measure for safety performance. The observation, recording, and analysis of traffic conflicts can increase the understanding of why collisions are occurring at the study locations.

Phase 3 –Additional Data Collection

Task 3.1: Data Requirements

In this task the project team prepared a list of further data requirements. The following data requirements were used in the evaluation:

- Crash data at treatment sites, before and after implementation
- Crash data at a group of similar reference sites, before and after implementation
- Traffic volume at the treatment sites, before and after implementation
- Traffic volume at a group of similar reference sites, before and after implementation
- Geometric and operational characteristics of the treatment sites
- Geometric and operational characteristics of the reference sites
- Roundabout implementation dates
- Photos of locations, before and after implementation
- Construction costs

Task 3.2: Safety Analysis Data Collection – Treatment Sites

The project team collected and summarized crash data, traffic information, and geometric information for the target and reference sites. The data collection and analysis included data for as many “before” and “after” years as are available, including such data for sites with less than three years of data in either of these periods. Crash data was assembled from the Michigan State Police (MSP) crash database. Traffic and geometric information was collected from the partner agencies and from online resources (i.e. MDOT, SEMCOG, Grand Valley Metro Council (GVMC), etc.). This data included number of approaches “before” and “after”, number of lanes per approach “before” and “after”, speed limits per approach “before” and “after”, and many other various features of the intersections. Intersection average daily traffic (ADT) volumes were also obtained for the roundabouts “before” and “after” construction. This information helped account for the change in traffic patterns in the crash analysis. This data can be found in the Appendix of this report.

Task 3.2: Safety Analysis Data Collection – Reference Sites

Untreated reference group data are required for this study to develop safety performance functions (SPFs) required for the Empirical Bayes (EB) evaluation methodology. Crash, traffic and geometric information was collected from various sources. These sites were similar to those of the treatment sites in order to have a group of sites that would represent the conditions of the roundabouts had no change in intersection type occurred.

Phase 4 – Final Analysis

Task 4.1: Development of Safety Performance Functions (SPFs)

Fundamental to the state of the art EB approach, SPFs were applied to represent the conditions before roundabout construction, i.e., for conventional stop controlled and signalized intersections. These SPFs relate crashes of different types and severities to traffic flow and other relevant factors, with appropriate adjustments for temporal effects. This enables the simultaneous accounting for temporal and possible regression-to-mean effect, as well as those related to changes in traffic volume. Where sufficient data is available, Generalized Linear Modeling would be used to estimate these functions using appropriate statistical analysis software. This approach allows for the specification of a negative binomial error structure known to be more appropriate for crash modeling than the normal distribution assumed in conventional regression analysis. In addition, the negative binomial dispersion parameter calibrated in the process is fundamental to the EB methodology.

For “before” period conditions, for which sufficient reference site data is not available, existing SPFs were adopted from the AASHTO SafetyAnalyst software¹. Existing SPFs were recalibrated for application. In this procedure, the ratio of the sum of the crash counts to the sum of the SPF

¹ <http://www.safetanalyst.org/>

estimated crashes for each year for the reference group is applied as an annual multiplier in the regression equation.

Task 4.2: Empirical Bayes Analysis to Develop Crash Reduction Factors

The EB methodology was used to conduct the “before”-“after” study. In the EB evaluation of the effect of a treatment, the change in safety for a given crash type at a treated location is given by:

$$B - A \quad (1)$$

where B is the expected number of crashes that would have occurred in the “after” period without the treatment and A is the number of reported crashes in the after period. Because of changes in safety that may result from changes in traffic volume, from regression-to-the-mean, and from trends in crash reporting and other factors, the count of crashes before a treatment by itself is not a good estimate of $B - A$ reality that has now gained common acceptance. Instead, B is estimated from an EB procedure in which a safety performance function (SPF) is used to first estimate the number of crashes that would be expected in each year of the “before” period at locations with traffic volumes and other characteristics similar to a treatment site being analyzed. The sum of these annual SPF estimates (P) is then combined with the count of crashes (x) in the “before” period at the treatment site to obtain an estimate of the expected number of crashes (m) before the treatment. This estimate of m is:

$$m = w(P) + (1 - w)(x) \quad (2)$$

The weights w_1 and w_2 are estimated as:

$$w = \frac{1}{1 + kP} \quad (3)$$

where k is the overdispersion parameter of the negative binomial distribution that is assumed for the crash counts used in estimating the SPF. The value of k is estimated from the SPF calibration process with the use of a maximum likelihood procedure.

A factor is then applied to m from Equation 2 to account for the length of the “after” period and differences in traffic volumes between the “before” and “after” periods. This factor is the sum of the annual SPF predictions for the “after” period divided by P , the sum of these predictions for the “before” period. The result, after applying this factor, is an estimate of B . The procedure also produces an estimate of the variance of B , the expected number of crashes that would have occurred in the “after” period without the treatment.

The estimate of B is then summed over all sites in a treatment group of interest (all treatment sites, or subsets disaggregated by traffic volume or other variables of interest) (to obtain B_{sum}) and compared with the count of crashes during the “after” period in that group (A_{sum}). The vari-

ance of B is also summed over all sections in the group of interest. The index of safety effectiveness (θ) is estimated as:

$$\theta = \frac{\frac{A_{sum}}{B_{sum}}}{1 + \frac{Var(B_{sum})}{B_{sum}^2}} \quad (4)$$

The standard deviation of θ is given by:

$$Stdev(\theta) = \sqrt{\theta^2 * \frac{\frac{Var(A_{sum})}{A_{sum}^2} + \frac{Var(B_{sum})}{B_{sum}^2}}{\left(1 + \frac{Var(B_{sum})}{B_{sum}^2}\right)^2}} \quad (5)$$

The percent change in crashes is in fact $100(1 - \theta)$; thus a value of $\theta = 0.7$ with a standard deviation of 0.12 indicates a 30 percent reduction in crashes with a standard deviation of 12%.

Task 4.3: Operational Impacts of Roundabouts

Operational impacts of the roundabout sites were determined using the RODEL software package. For each of the treatment sites, the Level-of-Service (LOS) and other operational measures of effectiveness (MOE) including delay were calculated. These MOEs were compared against the treatment site conditions before the roundabout was implemented. If traffic volume and geometric data is unavailable for the “before” period, the project team compared the treatment segments to nearby control sites.

Task 4.4: Economic Analysis

The change in safety for each site may be estimated by Equation 1 and then applied to estimate crash cost benefits in an economic analysis of the roundabout conversions to assess the cost-effectiveness of the program to date. First these crash changes are summed over all sites and an annual value calculated by dividing this sum by the total number of “after” period site years in the data. FHWA unit comprehensive crash costs are then applied to estimate an annual dollar benefit that can be compared to an annual program cost that includes the capital costs converted to an annual value using estimated service life and discount rate derived from consultation with MDOT. In this procedure, crashes were disaggregated by crash type and severity to the extent possible, and unit crash costs for those types and severities applied before aggregating to obtain an overall crash cost savings. Operational data, such as the reduction in delay, is also included in the economic analysis. A time of return was calculated for each site using the procedure identified in the FHWA Roundabout Guide.

Task 4.5: Identifying and Ranking the Issues

At the end of the technical analysis tasks, the project team summarized the issues identified at each site. The *Collision Risk Assessment Method* was used to determine the risk of each issue. This method was originally developed by Sany Zein of Opus International Consultants. This method has been adopted by FHWA in their RSA guidelines and training materials. Issues that contribute to a high frequency of crashes, or to crashes with high severity likelihood, should be ranked as having the highest risk and be assigned highest priority. Conversely, issues that are likely to rarely result in serious collisions should be assigned a relatively low priority.

Task 4.6: Update Guidance for Future Application

Based on the information outlined in the earlier tasks the existing guidelines in the *MDOT Roundabout Design Guide* were reviewed and updated guidance was provided.

2.0 Literature Review

The purpose of this literature review is to analyze existing research and best practices used by various road agencies in the field of roundabout effectiveness in the various aspects of transportation. This review will analyze the effect of roundabouts with respect to:

- Safety impacts
- Operational characteristics
- Pedestrian, bicyclist and driver behavior
- Truck maneuvers
- Traffic control devices
- Costs
- Winter operations

2.1 Safety Impacts of Roundabout Implementation

Many recent studies have investigated the effect that roundabouts would have on the safety of the road users. Roundabouts are expected to impact the safety of the motorists, as well as pedestrians and bicyclists. This section will examine how roundabouts effect safety related to drivers, pedestrians, and bicyclists.

2.1.1 Driver Safety

With the growing interest of roundabouts in the U.S., a need for data and studies regarding the safety impacts of roundabouts has become apparent. Many studies in the international literature have demonstrated that roundabouts are safer forms of intersections when compared to more conventional types (stop controlled or signalized). However, there had been a concern that the safety benefits that were realized in the international studies would not be directly related to those benefits observed in U.S. sites.

*Safety Effect of Roundabout Conversions in the United States*² by Persaud, Retting, Garder, and Lord evaluated the effects that roundabout conversions had on the safety of the intersection following the conversion of 23 intersections that were previously stop sign and traffic signal controlled within the U.S. The conversion of the intersections to roundabouts occurred in seven separate states across the U.S. between 1992 and 1997. The study applied a statistically rigorous procedure to compare the expected number of crashes per year without the roundabout conversion and the observed number of crashes per year after the conversion.

² Persaud, B. N., R. A. Retting, P. E. Gardner, and D. Lord. Safety Effect of Roundabout Conversions in the United States: Empirical Bayes Observational Before-After Study. In *Transportation Research Record 1751*, TRB, National Research Council, Washington, D.C., 2002.

The results of the analysis by Persaud et al. are summarized below:

- 40% reduction of all crash types
- 80% reduction of all injury crashes


A more comprehensive study was conducted by the National Cooperative Highway Research Program (NCHRP) in the NCHRP Report 572 *Roundabouts in the United States*³. A part of this study evaluated crash performance “before” and “after” conversion to a roundabout for 55 intersections within the U.S.

The results of the crash analysis in the NCHRP Report 572 are summarized below:

- 35.4% reduction of all crash types
- 75.8% reduction of all injury crashes

Roundabouts provide a safety benefit for many reasons. One of the primary benefits of a roundabout intersection design is the reduction in conflict points related to a standard intersection. As shown in Figure 2.1 the number of conflict points is greatly reduced for a roundabout compared to a standard intersection. The reduction in conflicts also eliminates the types of conflicts that typically result in the most serious of injuries (i.e. left-turn head-on and angle crashes).

Figure 2.1: Roundabout Conflict Points

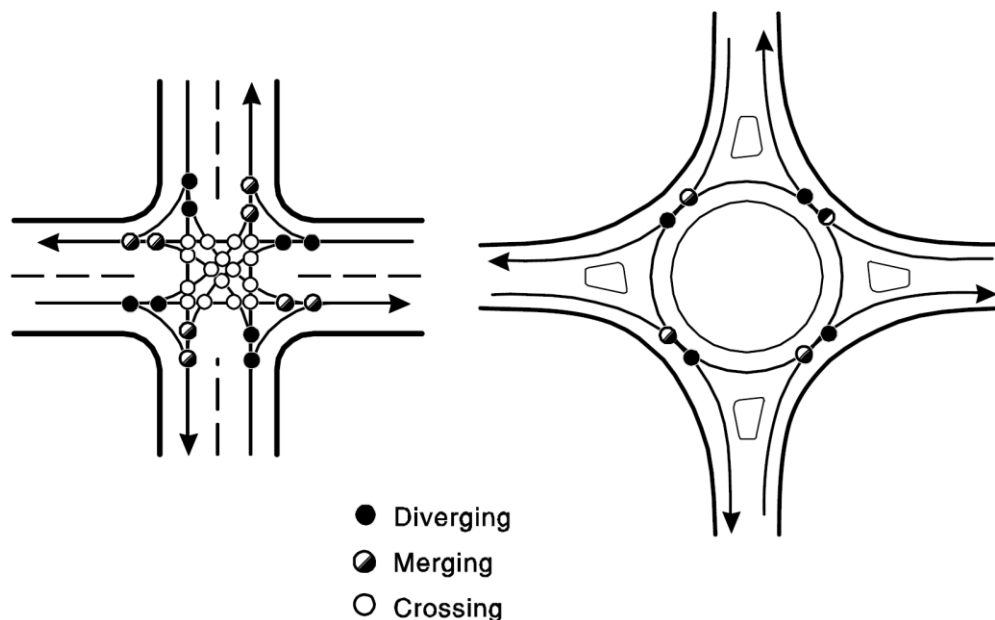

Source: NCHRP Report 672 Roundabouts: An Informational Guide

³ Rodegerdts, L., M. Blogg, E. Wemple, E. Myers, M. Kyte, M. Dixon, G. List, A. Flannery, R. Troutbeck, W. Brilon, N. Wu, B. Persaud, C. Lyon, D. Harkey, and D. Carter. *NCHRP Report 572 Roundabouts in the United States*. TRB, National Research Council, Washington, D.C., 2007.

With the addition of the roundabout, vehicle traveling speeds are typically reduced in order to safely navigate the roundabout. Speeds within a roundabout typically range from 10 to 25 miles per hour. As a result, crashes that do occur typically have lower severity than those at other intersection types. The NCHRP Report 672 *Roundabouts: An Informational Guide*⁴ summarizes the benefits provided by lower speeds below:

- Provide more time for entering drivers to judge, adjust speed for, and enter a gap in circulating traffic, allowing for safer merges;
- Reduce the size of sight triangles needed for users to see one another;
- Increase the likelihood of drivers yielding to pedestrians (compared to an uncontrolled crossing);
- Provide more time for all users to detect and correct for their mistakes or mistakes of others;
- Make crashes less frequent and less severe, including crashes involving pedestrians and bicyclists; and
- Make the intersection safer for novice users.

2.1.2 Pedestrian Safety

Pedestrian safety at roundabouts is affected by numerous factors including but not limited to driver and pedestrian unfamiliarity with roundabout operations. However, as previously stated, roundabouts reduce the number of conflict points. The number of pedestrian related conflict points is also reduced from sixteen (16) for a 4 legged signalized intersection, to eight (8) for a 4-leg roundabout intersection. British statistics found in studies by Maycock and Hall⁵ and Crown⁶ show the safety potential from the reduction in conflicts points also provides a reduction in pedestrian crashes. Table 2.1 summarizes the number of pedestrian crashes, per million trips, at various intersection types.

Table 2.1: Pedestrian Crashes for Various Intersection Types

Intersection Type	Pedestrian Crashes per Million Trips
Mini-roundabout	0.31
Conventional roundabout (older designs)	0.45
Flared roundabout (newer designs)	0.33
Signals	0.67


⁴ Rodegerdts, L., J. Bansen, C. Tiesler, J. Knudsen, E. Myers, M. Johnson, M. Moule, B. Persaud, C. Lyon, S. Hallmark, H. Isebrands, R. B. Crown, B. Guichet, and A. O'Brien. *NCHRP Report 672 Roundabout: An Informational Guide*. TRB, National Research Council, Washington, D.C., 2010.

⁵ Maycock, G. and Hall R. D. *Crashes at Four-Arm Roundabouts*. TRRL Laboratory Report LR 1120. Transport and Road Research Laboratory, Crowthorne, England, 1984.

⁶ Crown, B. "An Introduction to Some Basic Principles of U.K. Roundabouts Design." Presented at the ITE District 6 Conference on Roundabouts, Loveland, Colorado, October 1998.

Vehicle speeds also play a significant role in pedestrian crash severity. In a study by Leaf and Preusser⁷ it was found that a pedestrian is eight (8) times more likely to die when struck at 30 miles per hour than at 20 miles per hour. Figure 2.2 shows the chance of a pedestrian fatality in a pedestrian/vehicle crash. This study showed that the design speed is critical to pedestrian safety.

Figure 2.2: Chance of Pedestrian Fatality if Hit by a Motor Vehicle

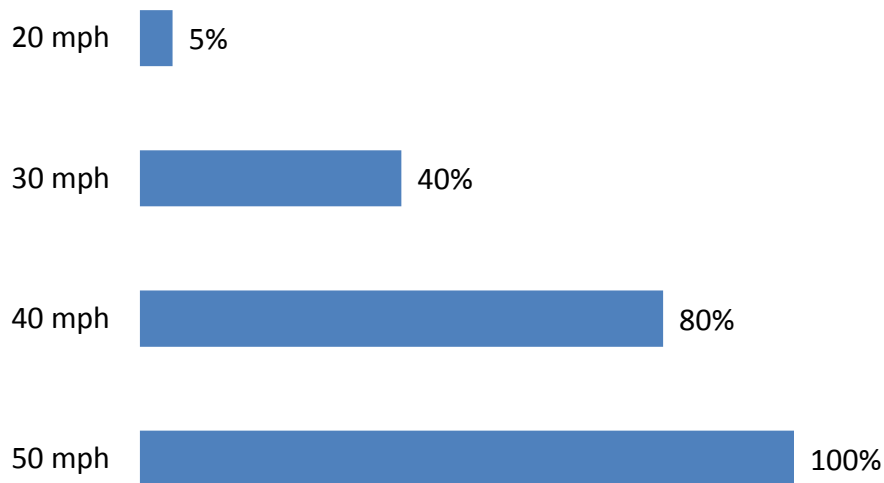

In a typical roundabout it is designed to have motorists traverse the roundabout at a slower speed; thus reducing the probability for a pedestrian to be fatally injured if struck by a vehicle. Another contributing factor to pedestrian safety at roundabouts is the ability for pedestrians to resolve conflicts with entering and exiting vehicles separately. This is done by utilizing the splitter island between the entering and exiting traffic.

Other concerns with pedestrian safety dealt with pedestrians with disabilities. NCHRP Report 674 *Crossing Solutions at Roundabouts and Channelized Turn Lanes for Pedestrians with Vision Disabilities*⁸ identifies and tested crossing treatments with the potential to enhance accessibility for pedestrians who are blind. This study was conducted in order to address the concern that roundabout intersections provide some visually impaired pedestrians with additional obstacles in navigating the intersection that standard intersections do not provide.

The results of the NCHRP Report 674 were that single lane roundabouts did not pose any greater crossing difficulties than that of similar signalized intersections. This was due to the low vehicle

⁷ Leaf, W. A. and D. F. Preusser. *Literature Review on Vehicle Travel Speeds and Pedestrian Injuries*. Final Report DOT HS 809 021. National Highway Traffic Safety Administration, Department of Transportation, Washington, D.C., October 1999.

⁸ Schroeder, B., R. Hughes, N. Roupail, C. Cunningham, K. Salamati, R. Long, D. Guth, R.W. Emerson, D. Kim, J. Barlow, B.L. Bentzen, L. Rodegerdts, and E. Myers. *NCHRP Report 674 Crossing Solutions at Roundabouts and Channelized Turn Lanes for Pedestrians with Vision Disabilities*. TRB, National Research Council, Washington, D.C., 2011.

speeds at the crosswalk that were a result of correct roadway geometry, the willingness of the majority of drivers to yield to pedestrians, and properly installed warning surfaces to distinguish between the sidewalk and the street.

The NCHRP Report 674 also concluded that while single lane roundabouts do not adversely affect visually impaired pedestrians behavior, two-lane roundabouts are challenging and not accessible for visually impaired pedestrians without the provision of additional crossing treatments or without a drastic change in driver behavior to voluntarily yield to pedestrians. Two treatments were tested in the report, both resulting in notable improvements over the non-treatment conditions. The tested treatments were pedestrian hybrid beacon (PHB, also known as a HAWK signal) and a raised crosswalk. Both of the treatments showed significant improvements in pedestrian delay and pedestrian crossing risk.

2.1.3 Bicyclist Safety

As stated in the previous sections, roundabouts have a favorable effect on traffic safety for both the driver and pedestrians, especially in the number of severe crashes. Roundabouts also impact the safety of bicyclists utilizing roundabouts. A study by Daniels et al.⁹ (2009) examined the effects of roundabout conversion on the number of bicycle crashes and the severity. Daniels et al. examined four different bicycle facilities design types at roundabouts:

- Mixed traffic;
- Bicycle lanes;
- Separate cycle paths;
- Grade-separated bicycle paths.

Table 2.2 summarizes the results of the study conducted by Daniels et al. in 2009. The Crash Modification Factors relate to conversion from a conventional intersection to a roundabout.

Table 2.2: Crash Modification Factors for Roundabout Bicycle Facility Designs

Bicycle Facility Design Type	Crash Modification Factor
	All injury crashes
Mixed Traffic	0.91
Bicycle Lanes	1.93
Separate Bicycle Paths	0.83
Grade-separated Bicycle Paths	0.56

Source: Daniels et al. 2009

The results of the study show that three (3) of the bicycle facility design types are expected to reduce total injury crashes at roundabouts. It should be noted that the 2003 *Manual on Uniform Traffic Control Devices (MUTCD)*¹⁰ states that designated bike lanes within the circulating roadway of a rounda-

⁹ Daniels, S., Brijs, T., Nuyts, E., Wets, G. "Injury crashes with bicyclists at roundabouts: influence of some location characteristics and the design of cycle facilities." *Journal of Safety Research*. Vol. 40, Issue 2, pp. 141-148. (2009)

¹⁰ *Manual on Uniform Traffic Control Devices for Streets and Highways*. FHWA, Washington, D.C., 2009.

bout shall not be used. Typical designs for roundabout bicycle facilities for the Wisconsin Department of Transportation (WisDot) and MDOT utilize the mixed traffic and separate bicycle paths bicycle facility design types. A more detailed analysis of bicyclist's behavior at roundabouts will be discussed in Section 2.3.2 of this report.

2.2 Operational Characteristics of Roundabouts

The research conducted in the NCHRP Report 572 analyzed the delay experienced by roundabouts and compared it to the delay experienced by signalized intersections with similar turning volumes. The results were that when at signal warrant volume thresholds, as defined in the MUTCD, the roundabout intersection experiences approximately 12 seconds less overall delay, than the signalized intersection. With roundabouts being a relatively new intersection type in the United States, they may not be operating as efficiently as they are capable of because of driver unfamiliarity. As drivers become more accustomed to how roundabouts operate, the operations of the roundabout will continue to improve.

Recent research has showed that roundabouts contain benefits and concerns in the aspect of traffic and pedestrian operations. The NCHRP Report 672 provided general information for a "planning-level" operational comparison of control modes:

- A roundabout will always provide a higher capacity and lower delays than all-way stop-control (AWSC) operating with the same traffic volumes.
- A roundabout is unlikely to offer better performance in terms of lower overall delays than two way stop control (TWSC) at intersections with minor movements (including cross-street entry and major-street left turns) that are not experiencing, nor predicted to experience, operational problems under TWSC.
- A single-lane roundabout may be assumed to operate within its capacity at any intersection that does not exceed the peak-hour volume warrant for signals.
- A roundabout that operates within its capacity will generally produce lower delays than a signalized intersection operating with the same traffic volumes

One common concern with roundabouts is capacity. A roundabout's capacity is based on its geometry (i.e. number of entering lanes, diameter, entry angle, lane width, etc.) and its peak hour traffic volume and turning patterns. The MDOT Roundabout Guidance Document, November 2007 provides approximate maximum capacities for various types of roundabouts. It is also noted in the MDOT Roundabout Guidance Document that the table is only a general guide and there is no substitute for an intersection-specific capacity analysis.

Table 2.3: Approximate Peak Hour Capacity for Roundabouts

Type of Roundabout	Approximate Peak Hour Capacity (Combined entering volume for all approaches)
Single-lane	Up to 2,000 vehicles per hour
Two-lane	Up to 4,000 vehicles per hour
Three-lane	Up to 7,000 vehicles per hour

Source: MDOT Roundabout Guidance Document, November 2007

The WisDOT Roundabout Guide (February 2011)¹¹ outlines typical daily service volumes for various roundabout types:

Table 2.4: Typical Daily Service Volumes for 4-Leg Roundabouts

Roundabout Type	Typical Daily Service Volumes* (vpd) 4-leg roundabouts
Urban Single-lane	Less than 25,000
Urban Multilane (2-lane entry)	25,000 to 55,000
Urban Multilane (3 or 4-lane entry)	55,000 to 80,000
Rural Single-lane	Less than 25,000
Rural Multilane (2-lane entry)	25,000 to 55,000
Rural Multilane (3-lane entry)	55,000 to 70,000

*Capacities vary substantially depending on entering traffic volumes and turning movements.

Roundabout capacity can be analyzed using many different models. The model that is used by both MDOT and WisDOT is the empirical formula method. The RODEL and ARCADY software programs are typically used in determining roundabouts optimized conditions for the various traffic characteristics. The RODEL and ARCADY software packages allow for the design to be optimized rather than allowing for the minimum criteria to be met in order to satisfy the capacity and delay criteria.

The *Highway Capacity Manual* (HCM) defines quality of service as how well a transportation facility or service operates from a traveler's perspective. The HCM defines Level of Service (LOS) as a performance measure or measures that represent that quality of service. For roundabouts the HCM 2010 defines LOS using control delay which can be seen in Table 2.5 (same as unsignalized intersection LOS).

Table 2.5: Level of Service Criteria at Roundabout Intersections

Control Delay (sec/veh)	Level of Service by Volume-to-Capacity Ratio	
	$v/c \leq 1.0$	$v/c \geq 1.0$
0-10	A	F
>10-15	B	F
>15-25	C	F
>25-35	D	F
>35-50	E	F
>50	F	F

¹¹ *Roundabout Guide*. Wisconsin Department of Transportation. 2011.

2.3 Pedestrian, Bicyclist, and Driver Behavior in Roundabouts

The overall behavior of motorists, pedestrians, and bicyclists differ while utilizing roundabouts than other traffic control modes (stop controlled or signal controlled). With signalized and stop controlled intersections the road users (pedestrians, bicyclists, and drivers) have a designated time or phase to traverse the intersection. In a roundabout, it is up to the user to determine an acceptable gap in traffic in order to enter the intersection. This section will analyze the advantages and disadvantages for the different road users in a roundabout.

2.3.1 Pedestrian Behavior

At roundabout locations where pedestrian access is provided, pedestrians typically traverse the roundabout utilizing crosswalks around the perimeter of the roundabout. When proper space is provided on the splitter island, allowing pedestrians to use the splitter island as a refuge island, pedestrians can consider one direction of traffic at a time. The locations of the pedestrian crosswalks are located one to two car lengths from the yield line for various reasons. The NCHRP Report 672 states that crosswalks are set back from the yield line to:

- Shorten the crossing distance compared to locations adjacent to the inscribed circle;
- Separate vehicle-vehicle and vehicle-pedestrian conflict points, and
- Allow the second entering driver to devote attention to crossing pedestrians while waiting for the driver ahead to enter the circulatory roadway.

As previously discussed, there were concerns with visually impaired pedestrians being able to traverse roundabouts. Additional traffic control devices, such as HAWK signals or Flashing Pedestrian Beacons at roundabout entrances and exits help enforce driver compliance and will be further examined in Section 2.5.

2.3.2 Bicyclist Behavior

Bicyclists have the ability to traverse roundabouts in multiple ways:

- Riding on the shared use path
- Riding in the circulating lane like a motorist, controlling traffic within the lane
- Dismounting and walking like a pedestrian

This allows for more experienced bicyclists to utilize the roadway to traverse the intersection, while novice bicyclists can utilize the shared path or dismount and cross the intersection utilizing the pedestrian facilities.

Bicyclists who ride on the sidewalk or shared path and who dismount to walk like pedestrians will face the same challenges as pedestrians when attempting to cross the intersection. Bicyclists will need to select acceptable gaps in traffic in order to cross a leg of traffic at a roundabout.


Bicyclists who utilize the circulating lane like motorists may face some of the following challenges: (1) Bicyclists must be able to “control the lane” before entering the roundabout, preventing motorists merging into the path of the bicyclist, (2) Higher vehicle volumes may minimize acceptable bicyclist

gaps (3) Due to varying speeds of motorists, bicyclists may not be able to judge correctly the size of a gap to determine if a gap is acceptable (4) Motorists entering the roundabout may not be able to properly judge the bicyclist's speed or even notice the bicyclist approaching.

2.3.3 Driver Behavior

Drivers approaching roundabouts have two decisions to make: choose the correct lane for their intended destination, and yield to those who have the right-of-way. Drivers must adjust to the decisions that in roundabouts are generally more complex than for other intersection types, mainly because drivers typically must yield to those who have the right-of-way and the drivers may not always be able to see their exit or destination, possibly disorienting or confusing the driver. The geometric configuration of roundabouts also has a positive influence on driver behavior. As seen in Figure 2.3 roundabouts have many design features that enhance driver behavior. It forces drivers to operate at slower speeds, yield to oncoming traffic and be aware enough to accept gaps in traffic large enough to enter the flow of traffic.

Figure 2.3: Roundabout Safety Features

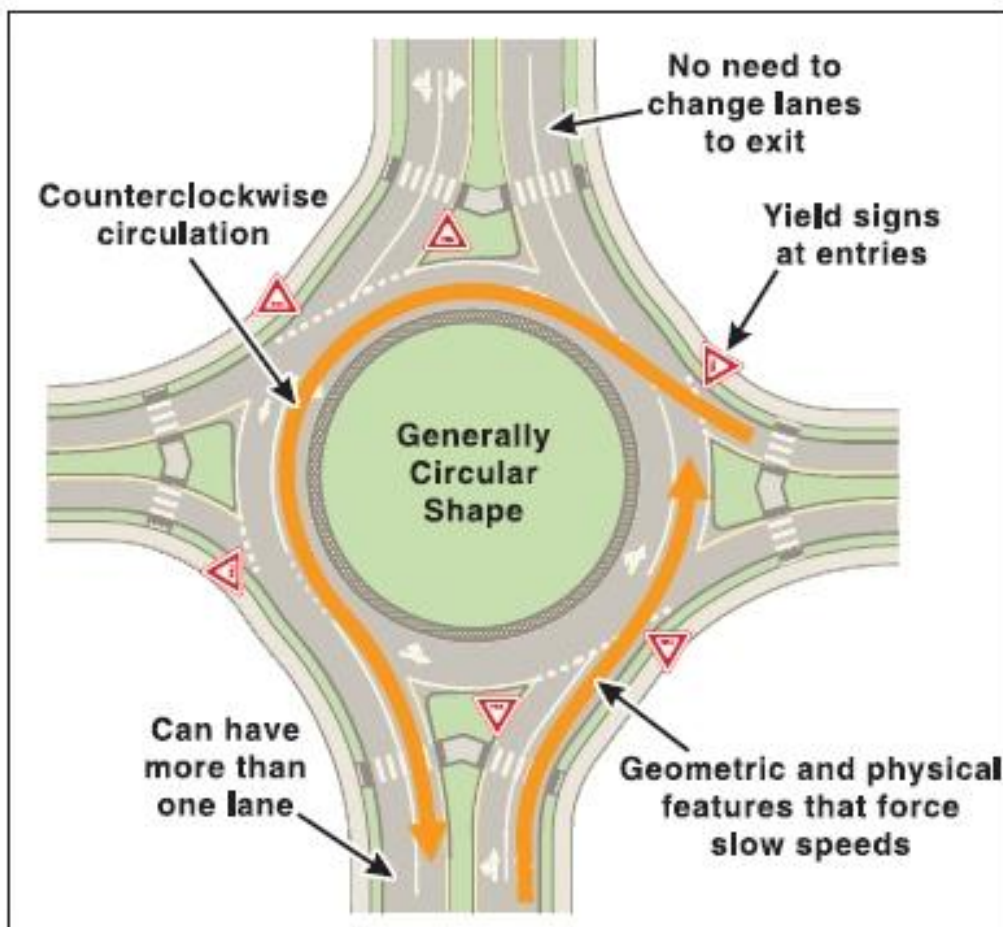


Source: NCHRP Report 672 Roundabouts: An Informational Guide

In a roundabout, yielding to those who have the right-of-way occurs at several points. The NCHRP Report 672 summarizes the points along a roundabout where the decision to yield may occur:

- Drivers must be mindful of any bicyclists merging into motor vehicle traffic from the right side of the road, a bicycle lane, or shoulder.
- Drivers must yield to any pedestrians crossing at the entry (the laws on this vary somewhat from state to state).
- Drivers must choose an acceptable gap in which to enter the roundabout.
- Drivers must yield to any pedestrians crossing the exit (the laws on this vary somewhat from state to state).

As previously mentioned, roundabouts may feature HAWK signals. These signals are also a relatively new traffic control device, and may not be fully understood by drivers. The NCHRP Report 674 analyzed driver behavior at HAWK signals. Figure 2.4 summarizes the results of the NCHRP Report 674 evaluation.

Figure 2.4: Evaluation of Driver Behavior at HAWK Signals

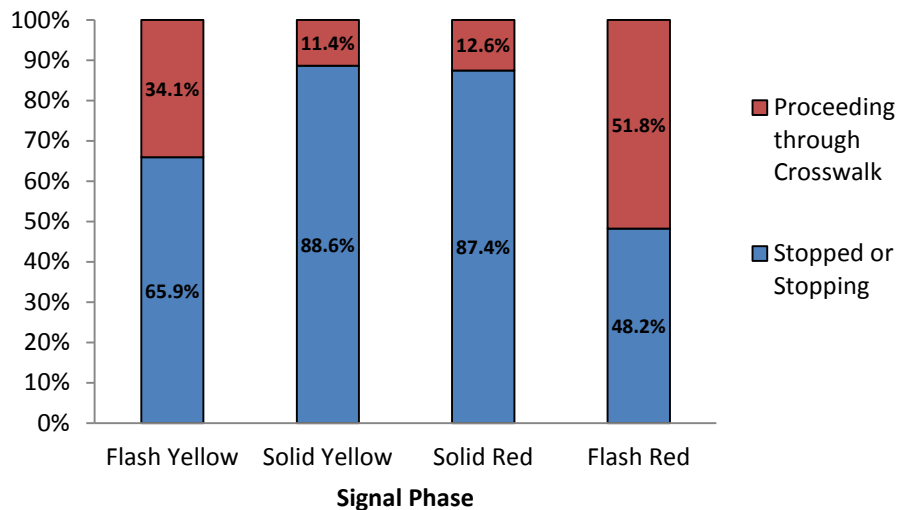

The figure above shows that 12.6% of the vehicles were observed to proceed through the crosswalk during the “Solid Red” phase, which they are legally required to stop at and remain stopped until the phase changes. Conversely, 48.2% of vehicles were remained stopped during the “Flashing Red” phase when they are able to proceed when the crosswalk is clear; suggesting some inefficiency in driver knowledge in response to the HAWK signals.

2.4 Truck Maneuvers in Roundabouts

According to the MDOT Roundabout Guidance document, roundabouts are typically designed for a WB-62 truck. This design would allow large vehicles to circumnavigate the roundabouts. Where geometry would be limited and a roundabout design for a WB-50 or WB-62 may not be possible, truck aprons are an option.

WisDOT defines truck aprons as a traversable portion of the central island adjacent to the circulatory roadway. It is required to accommodate snow plows and off-tracking of trucks. The FHWA recommends using a truck apron when there are no means for providing adequate deflection while accommodating the design vehicle because the aprons provide a lower level of operation than standard non-mountable islands.

The MDOT Roundabout Guidance Document explains two methods of two lane roundabouts to accommodate large vehicles. The first method is to assume that the truck will utilize more than one lane to enter, circulate, and exit the roundabout. The second method is to design the roundabout so that each lane within the roundabout can accommodate a large truck. The second method is not as commonly used because the overall geometry of the roundabout is typically larger, possibly resulting in increased right-of-way needs, higher cost, and a potential for increases in certain types of crashes.

A study by the Center for Transportation Research and Education¹² in 2008 examined the network of roundabouts in Bend, Oregon. The study determined lessons that should be learned from the City of Bend implementation of the roundabouts. The lessons learned include:

- When accommodating trucks, truck apron height should discourage passenger vehicles and allow for easy maintenance (i.e. plowing)
- Trucks should be allowed to use both lanes in a two-lane roundabout to minimize the design footprint.

2.5 Traffic Control Devices within Roundabouts

Traffic control devices within roundabouts are used in order to enhance safety and traffic operations. As previously mentioned in 2.3.1, two-lane roundabouts may be challenging and not accessible for visually impaired pedestrians without the provisions of additional crossing treatments. These additional provisions include, but are not limited to:

- Pedestrian Hybrid Beacons (PHB, also known as HAWK signals)
- Flashing pedestrian beacons (Including the Rectangular Rapid Flashing Beacon)
- Raised sidewalks

The NCHRP Report 674 analyzed the effectiveness of the HAWK signal and raised sidewalk as possible treatments at roundabout intersections. Both of the treatments showed significant improvements in pedestrian delay and pedestrian risk.


Additional traffic control devices utilized at roundabouts may include advanced signing, destination and lane use signs, and chevron signs located in the central island.

¹² Isebrands, H., S. Hallmark, E. Fitzsimmons, and J. Stroda. *Toolbox to Evaluate the Impacts of Roundabouts on a Corridor or Roadway Network*. Center for Transportation Research and Education, Ames, IA, July 2008.

2.6 Costs

As previously discussed, due to the need to accommodate large trucks, roundabouts typically require more space within the intersection than other conventional intersections (signalized or stop controlled). However, this may be partially offset by the space saved compared with turning lane requirements and lane tapers needed at other intersection types. As seen in Figure 2.5, it is important to determine if a roundabout or a traffic signal will fit within the existing property lines or if additional right-of-way will be required.

Figure 2.5: Right-of-way Requirements for Roundabouts and Signalized Intersections

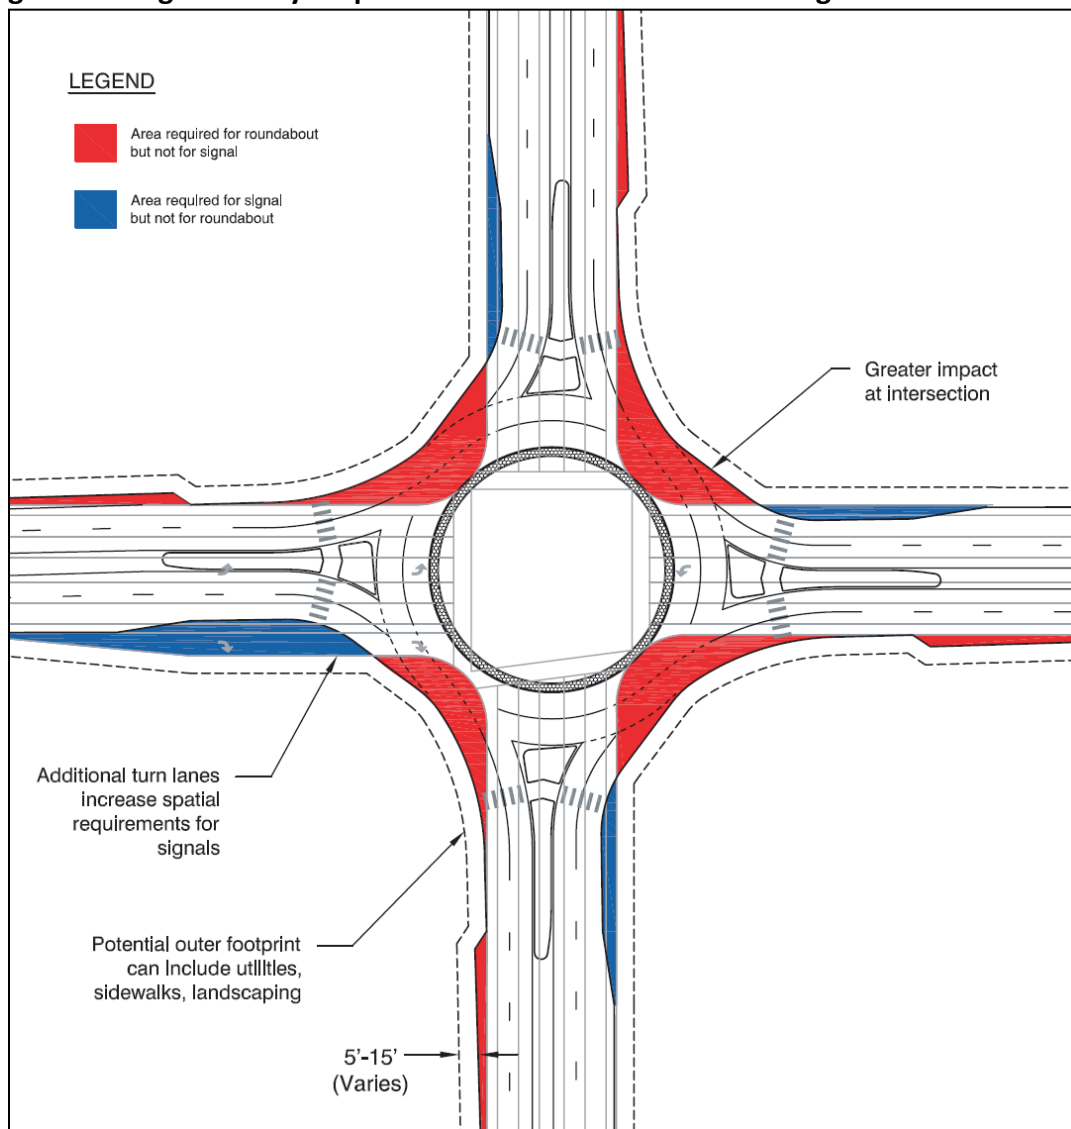

Source: NCHRP Report 672 Roundabouts: An Informational Guide

Operational and maintenance costs of roundabouts are typically higher than stop controlled intersections, but lower than signalized intersections. The reason why the operational and maintenance costs of signalized intersections are typically higher than roundabouts is that traffic signals consume

electricity and require periodic services to replace bulbs, detectors, and require periodic signal re-timings. The ambient lighting for roundabout and signalized intersections is typically greater than that at stop controlled intersections.

When conducting an economic evaluation of what intersection type is best suited for a given intersection it is important to account for both the costs and benefits of each alternative. While in some instances, the costs of the construction of a roundabout may be greater than other intersection types, the benefits of utilizing a roundabout may be greater than other intersection types. The NCHRP Report 672 suggests utilizing the benefit-cost analysis method when evaluating public work projects of this type.

As previously discussed, roundabouts have been shown to decrease crash rates and also decrease vehicle delay and emissions in most instances. Mandavilli, Russell, and Rys¹³ (2003) conducted a study that evaluated three locations in Kansas where roundabouts replaced all way stop controlled intersections. The results of this study were:

- Carbon Monoxide (CO) emissions reduced by 38% and 45%
- Particulate Matter (PM) reduced by 45%
- Carbon Dioxide (CO₂) reduced by 55% and 61%
- Nitrogen Oxide (NO_x) reduced by 44% and 51%
- Hydrocarbons (HC) reduced by 62% and 68%
- Statistically significant decrease in delay, queuing, and stopping

Varhelyi¹⁴ (2002) conducted a study evaluating the effects of the implementation of a roundabout at signalized intersections. The results of this study were:

- Number of vehicles stopping reduced from 63% to 26%
- Carbon Monoxide (CO) emissions reduced by 29%
- Nitrogen Oxide (NO_x) reduced by 21%
- Fuel consumption reduced by 28%

2.7 Winter Operations

The NCHRP Report 672 outlines snow removal at roundabouts in the maintenance section. The report states that the geometric layout of a roundabout should be designed to accommodate the width of a snow plow. Many jurisdictions have standard widths for snow plows, and they should be accounted for within the design stage. The NCHRP Report 672 also states that some maintenance crews have noted that roundabouts make it easier to turn around snowplows

¹³ Mandavilli, S., E. R. Russell, and M. J. Rys. *Impact of Modern Roundabouts on Vehicular Emissions*. Proceedings of the 2003 Mid-Continent Transportation Research Symposium, Ames, IA, August 2003.

¹⁴ Varhelyi, Andras. *The Effects of Small Roundabouts on Emissions and Fuel Consumption: A Case Study*. Transportation Research Part D. Vol. 7. 2002, pp. 65-71.

The MDOT Roundabout Guidance Document along with the WisDOT Roundabout Guide also provides information on snow removal at roundabout intersections. They state that snow removal should be conducted from the inside of the roundabout to the outside of the roundabout. This is done to keep the storage of the snow away from the central island as much as possible. The storage should also not create sight obstructions for drivers as well as they should not affect pedestrian access through a roundabout.

3.0 Best Practices Review

Current MDOT guidance related to roundabouts is primarily included in MDOT's roundabout guide which was published in November 2007. Since that time, there have been many developments related to best practices. Specifically, FHWA has updated their roundabout guide (published as NCHRP report 672), numerous other states have developed or updated their guides with applicable information, additional research studies have been conducted, and roundabout design philosophy/techniques have evolved. As part of the MDOT Roundabout Study, numerous guides, reports, scholarly research articles, and studies were reviewed to identify best practices being used by FHWA, other State Highway Agencies, and municipalities. The following best practices should be considered for inclusion in applicable MDOT guidance and policies. The practices noted below are described in general terms and do not include specific design details.

1. Update policies and guidance to be consistent with the revised FHWA Roundabout Guide (NCHRP Report 672). It is recommended that a thorough evaluation would be conducted to ascertain all areas where updates are needed. Specific areas of emphasis could include the following:
 - Mini-Roundabouts – Consideration should be given to including guidance for mini-roundabouts per FHWA Roundabout Guide. Although MDOT may have limited opportunities for implementing mini-roundabouts on the state trunk highway system, MDOT should consider mini-roundabouts at locations such as on low-speed roadways with congestion problems (may be applicable on some state trunk routes in downtown areas). As noted in the FHWA Roundabout Guide, mini-roundabouts operate in the same manner as larger roundabouts and can help reduce delays and improve safety at physically constrained intersections. In addition to the FHWA Roundabout Guide, FHWA is currently undertaking a nationwide study to develop design recommendations and applications for mini-roundabouts. MDOT should consider incorporating the results of this study in the MDOT Roundabout Guide in order to provide information that may be helpful to state and local officials.
 - Preventing exiting and circulating conflicts – Incorporate language/design criteria from the FHWA Roundabout Guide for preventing exiting and circulating conflicts at multi-lane roundabouts. As noted in Section 6.5.6 - Exit Curves, conflicts can occur if appropriate lane assignments are not provided, as a result of inadequate horizontal design features, and/or if there is too much separation between an entry and adjacent exit. The guide provides effective design measures to prevent such exiting and circulating conflicts.
 - Conditions for using simulations – There may be certain complex situations where model simulations can provide additional benefits beyond the isolated intersection analysis offered by RODEL. The FHWA Roundabout Guide notes that many different simulation software packages are available for modeling roundabouts. Any simulation software that is used should be calibrated to reflect the capacities and delays predicted by RODEL, ARCADY, and Sychro 8.0.
 - Applying HSM for crash analyses – NCHRP Report 572 used U.S. data to develop safety prediction models for intersection and approach analysis. The models have been included in the recently published Highway Safety Manual (HSM). Therefore, if detailed crash analysis is being

performed related to roundabouts, the HSM crash procedures could be used as an evaluation method.

- Trucks – The FHWA Roundabout Guide (Section 6.5.7) illustrates design options for accommodating trucks - either staying in lane or using both lanes to navigate the intersection.
- Lighting – The FHWA Roundabout Guide (Chapter 8) provides a detailed summary of recommended lighting considerations based on the *Design Guide for Roundabout Lighting* (Illumination Engineering Society).
- Landscaping – The FHWA Roundabout Guide (Chapter 9) provides general landscaping principles and guidance for landscaping the central island, splitter islands, and approaches.
- Bypass lanes – The FHWA Roundabout Guide (Section 6.8.6) illustrates options and considerations for designing right-turn bypass lanes.
- Pedestrian and bicycle accommodations – The FHWA Roundabout Guide provides general guidance for pedestrian and bicycle facilities at roundabouts.
- Concrete jointing – The FHWA Roundabout Guide (Section 6.8.8.2) provides information for designing joint patterns when using concrete at roundabouts.
- Signing and marking per new MUTCD – Develop signing and marking language consistent with the federal MUTCD (Section 2B.45 and Chapter 3C, respectively).

2. Incorporate information from the Wisconsin Department of Transportation (WisDOT) Roundabout Guide– Facilities Development Manual (FDM). It is recommended that an evaluation would be conducted to ascertain areas where information could be adapted to improve MDOT’s policies. Specific areas of emphasis should include, at a minimum, the following:

- Truck accommodation – Section 30.5.4 of the FDM.
 - Oversize/overweight (OS/OW) truck accommodation
 - Develop statewide freight network, identifying OS/OW routes to help guide roundabout locations and size
- Methods for avoiding path overlap – Section 30.5.16 of the FDM
- Splitter island design and curbing for high speed approaches – Section 30.5.18 of the FDM
- Measuring phi – Section 30.5.20 of the FDM
- Methods for constructing a fast path spline – FDM 11-26-50, Attachment 50.1

3. Incorporate findings from the WisDOT/Minnesota Department of Transportation (Mn/DOT) Joint Truck Study which is currently underway. This study investigates design methods for accommodating trucks at multi-lane roundabouts. Phase 1 is a synthesis of current design practice and has been completed. Phase 3 of the study includes design guidelines for accommodating trucks. This information will be incorporated into the WisDOT and Mn/DOT roundabout guides.

4. Considering the very significant safety benefits provided by roundabouts and the fact that this intersection type often provides better traffic flows at similar/lower cost (relative to other intersection types), MDOT should consider adopting a formal policy requiring careful consideration (along with other viable options) and utilization of roundabouts at all appropriate locations on the state trunk highway system. Such a policy could require that roundabouts (along with other via-

ble options) be fully evaluated for all planning and design projects meeting certain criteria (criteria would be broad so that most capital projects at intersections would be covered). Such a policy would be consistent with FHWA directives. Specifically, FHWA's Guidance Memorandum on Consideration and Implementation of Proven Safety Countermeasures (dated July 10, 2008, revised July 1, 2009) states the following:

Roundabouts are the preferred safety alternative for a wide range of intersections. Although they may not be appropriate in all circumstances, they should be considered as an alternative for all proposed new intersections on Federally-funded highway projects, particularly those with major road volumes less than 90 percent of the total entering volume. Roundabouts should also be considered for all existing intersections that have been identified as needing major safety or operational improvements. This would include freeway interchange ramp terminals and rural intersections.

Many other State Highway Agencies have adopted policies and guidance which result in greater utilization of this intersection type. Some state DOT's (such as New York, Alaska) have adopted a "roundabout first" approach to intersection design. These states require that a roundabout be used as the intersection of choice unless there are certain reasonable conditions which would preclude the use of a roundabout. Other states (such as Wisconsin) have policies which encourage roundabout use in appropriate situations (i.e., not "roundabout first", but still highlighting the importance of seriously considering roundabouts), and their staff members are fairly aggressive in implementing roundabouts at appropriate locations where an objective comparison to other options shows roundabouts to be the best solution. Although a "roundabout first" policy may not be appropriate for MDOT, the best practice of careful comparison to other options could be highlighted by MDOT.

5. Section 6.8.5.4 of the FHWA Roundabout Guide shows the use of a succession of three curves (chicane) to achieve speed reduction on high speed approaches prior to the roundabout. Available research does not demonstrate any safety benefits associated with this design method. Therefore, except in unusual cases, this design technique is not recommended for inclusion in the MDOT Roundabout Guide.
6. Require MDOT's Local Agency Program projects to follow all aspects of FHWA and MDOT policies and guidance, including application of roundabout guides.
7. Require uniform information be provided to MDOT's Geometric Design Unit (GDU) for roundabout reviews. Information needed could be modeled after WisDOT Roundabout Guide (FDM 11-26-5) which includes:
 - Table of critical design parameters
 - Truck turn graphics
 - Fast path graphics
 - Sight distance graphics
 - RODEL, ARCADY, or Synchro 8.0 outputs

8. Pedestrian Facilities – Since the development of the MDOT Roundabout Guide, numerous studies and reports have been undertaken related to pedestrian accessibility, pedestrian facility types, and accommodation of pedestrians with disabilities. Therefore, it is recommended that the MDOT Roundabout Guide provide updated information related to this topic, to include the following:
- Incorporation of applicable results from *NCHRP Report 674: Crossing Solutions at Roundabouts and Channelized Turn Lanes for Pedestrians with Vision Disabilities* and related studies is recommended. Criteria could be developed for utilizing the following elements:
 - Pedestrian Hybrid Beacons (HAWK signal)
 - Rectangular Rapid Flashing Beacon (RRFB)
 - Raised crosswalks/speed table.
 - Z-style crosswalks
 - Incorporation of applicable findings from the Oakland County, Michigan lawsuit regarding ADA accommodations at roundabouts¹⁵.
 - Consider installing Z-style crosswalks at multi-lane roundabouts, regardless of whether PHB's are used.
9. Develop standard traffic counting methodology for roundabouts.
10. Incorporate complete street policy recommendations into the MDOT Roundabout Guide. MDOT is currently developing a complete street policy. It is recommended that the two documents are integrated as applicable.
11. Discourage the use of radial design techniques at three lane roundabouts. Alternatively, emphasis should be placed upon providing optimal entry angles of 20 degrees or greater.
12. Develop example drawings to illustrate common roundabout design situations. This would not include standard drawings that apply in all situations however it would provide novice designers basic guidance and help illustrate good design techniques.
13. If MDOT provides guidance for teardrop roundabout designs, their effect on the capacity of the next downstream entry must be assessed carefully. This is because a teardrop scheme will result in one entry that is free-flowing (i.e., does not yield). Under such conditions, the capacity of the next entry downstream is reduced. Additionally, RODEL, ARCADY, Synchro 8.0, and many other software packages may not accurately model the downstream entry since many software packages assume yielding at all entries. As a result, designers will need to take this into consideration. These capacity and modeling implications should be reflected in any new guidance provided by MDOT.

¹⁵ Department of Blindness and Low Vision Studies – Western Michigan University, Institute for Transportation Research and Education – North Carolina State University, Accessible Design for the Blind. Kittelson & Associates. *Road Commission for Oakland County PHB and RRFB Study*. 2011

14. Consider using a phased approach to construction of multi-lane roundabouts, especially where three-lane roundabouts are being considered. A phased approach typically involves initial construction of geometry that will accommodate opening day volumes plus five to ten years of traffic growth. Once certain “trigger” volumes are reached, the roundabout can be “converted” to the ultimate long term design. Typically, this will involve adding additional lanes. Different approaches to adding lanes are available and should be assessed in the new guidance.
15. Consider the use of overhead lane signs. In certain limited circumstances, it may be beneficial to consider the use of overhead signs to guide motorists as they approach a roundabout. Incorporation of information from the WisDOT Roundabout Guide—FDM (Section 35.1.3.2) could be considered. Criteria identifying when overhead signs should be used could also be developed.
16. Consider the use of alternative software packages to model roundabouts in order to determine capacity and delay. With the recent publication of the 2010 HCM, the HCM methodology should be considered as an adequate analysis tool. The HCM procedure utilized U.S. data to develop a methodology to determine a roundabouts capacity, delay, and Level of Service. There are many other software packages available (VISSIM, ARACDY, RODEL, 2010 HCM, etc) and it should be determined what is the best software package to use when modeling roundabout traffic patterns.

4.0 Field Data Collection

This section discusses how the roundabouts were identified and the data collected during the site visits. The data collected included geometric data, operational data, and conflict data.

4.1 Identify Roundabouts

At the onset of the project, the project team constructed a list of roundabouts to be evaluated. The project team contacted MDOT Region and TSC traffic engineers to determine if any roundabouts have been completed in their regions. Additionally, cities and county road commissions were contacted to determine if any roundabouts have been applied to their roadways. A total of 97 roundabouts were identified within Michigan.

Of the 97 roundabouts 58 were selected to be included in the final analysis. The roundabout sites were reduced from 97 to 58 sites for the following reasons:

- Constructed outside of the study period (2001-2009)
- No crash data was found from the Michigan State Police TCRS in the time frame of “before and “after”
- More than 4 approaches

Table 4.1 summarizes the 58 roundabouts that were selected for the final analysis along with information about the city they are in, build type (either a new build or converted intersection), and the surrounding environment. Of the 58 roundabout intersections, fifteen (15) were selected for site visits. The bolded intersections in Table 4.1 denote the locations that site visits were conducted at.

Table 4.1: Roundabouts Selected for Final Analysis

Intersection	City	New Build / Converted	Environment
I-94 Business (Main St) & Riverview Dr	Benton Harbor	Converted	Urban
I-94 Business (Main St) & 5th St	Benton Harbor	Converted	Urban
US-127 BR & Mission St	Clare	Converted	Rural
Willow Hwy & Canal Rd	Delta Charter Twp	Converted	Rural
Bennett Rd & Hulett Rd	Okemos	Converted	Rural
Lake Lansing Rd & Chamberlain Dr	Lansing	Converted	Urban
Wood St & Sam's Way	Lansing	Converted	Urban
Michigan Ave & Washington Square	Lansing	Converted	Urban
Cedar St & Holbrook Dr	Holt	Converted	Rural
Beal Ave & Barnes Ave	Lansing	Converted	Urban
Harding Ave & Pershing Ave	Lansing	Converted	Urban
Moores River Dr & Boston Blvd/Pattengill Ave	Lansing	Converted	Urban
Mosher St & Main St	Mt Pleasant	Converted	Urban
Michigan Ave & Rankin St	Kalamazoo	Converted	Urban
Cherry St & Jefferson Ave	Grand Rapids	Converted	Urban

Intersection	City	New Build / Converted	Environment
Wealthy St & Lafayette Ave	Grand Rapids	Converted	Urban
Wealthy St & Jefferson Ave	Grand Rapids	Converted	Urban
7 Mile Rd & Brewer Ave	Plainfield	Converted	Rural
Hamburg Rd & Winans Lake Rd	Brighton	Converted	Rural
Kensington Rd & Jacoby Rd	Milford	Converted	Rural
Whitmore Lake Rd & Lee Rd	Brighton	Converted	Urban
SB US-23 & Lee Rd	Brighton	Converted	Urban
NB US-23 & Lee Rd	Brighton	Converted	Urban
Green Oak Village Place & Green Oak Ave	Brighton	New Build	Urban
Green Oak Village Place & Lee Rd	Brighton	New Build	Urban
Main St & 3rd St	Brighton	Converted	Urban
Hayes Rd & 25 Mile Rd	Shelby Township	Converted	Rural
Romeo Plank Rd & 19 Mile Rd	Macomb Township	Converted	Rural
Romeo Plank Rd & Cass Ave	Clinton Township	Converted	Rural
M-53/Van Dyke & 18.5 Mile	Sterling Heights	New Build	Urban
Utica Rd & Dodge Park Rd	Sterling Heights	Converted	Urban
Stratford Blvd and Charleston Dr/Plantation	Washington	New Build	Urban
Waterside Dr & W. Vergote Dr	New Baltimore	New Build	Urban
SB M-53 ramp & 26-Mile	Utica	Converted	Rural
NB M-53 ramp & 26-Mile	Utica	Converted	Rural
M-46/Apple Ave & M-37/Newaygo Rd	Casnovia	Converted	Rural
3rd St & Western Ave	Muskegon	Converted	Urban
Chesapeake Dr & Walker Rd	Muskegon	New Build	Rural
Maple Rd & Drake Rd	West Bloomfield Twp	Converted	Urban
Maple Rd & Farmington Rd	West Bloomfield Twp	Converted	Urban
14 Mile Rd & Farmington Rd	Farmington Hills	Converted	Urban
Cooley Lake Rd & Bogie Lake Rd	White Lake	Converted	Rural
Cooley Lake Rd & Oxbow Lake Rd	White Lake	Converted	Rural
Commerce Crossing & Loop Rd	Walled Lake	New Build	Rural
Baldwin Rd/Indianwood Rd & S. Coats Rd	Orion	Converted	Rural
Taft Rd & Morgan Blvd	Northville	Converted	Rural
Chambers/Renton & Johanna Ware	Wixom	New Build	Urban
Old US-27/North Hwy & Livingston Blvd	Gaylord	Converted	Rural
68th Ave & Randall St/ State	Coopersville	Converted	Rural
SB I-75 & M-81/Washington Road	Saginaw	Converted	Rural
NB I-75 & M-81/Washington Road	Saginaw	Converted	Rural
Nixon Rd & Huron Pkwy	Ann Arbor	Converted	Urban
Geddes Rd & Superior Rd	Ypsilanti	Converted	Rural
Maple Rd & EB M-14	Ann Arbor	Converted	Urban

Intersection	City	New Build / Converted	Environment
Maple Rd & WB M-14	Ann Arbor	Converted	Urban
Maple & Skyline High School	Ann Arbor	New Build	Urban
Campus Parkway & Community Dr	Saline	New Build	Urban
Campus Parkway & Suncrest Dr	Saline	New Build	Urban

Note – Intersections in **bold** were selected for a detailed site visit

4.2 Site Visits

The site visits were conducted to gain firsthand knowledge of the physical and operational conditions of the various types of roundabouts. The site visits were also used as an opportunity to observe factors that may increase the collision risk for vehicles and non-motorized users. The site visits included the following actions:

- Walk Through (site visit observing the characteristics of the intersection);
- Review of geometric design (layout of the intersection);
- Observe operations of the roundabout;
- Consider a wide range of road user abilities (from pedestrians to motor vehicles);
- Consider the visibility of road users at night;
- Review truck turning maneuvers;
- Review traffic control devices;
- Examine the treatment and transition of non-motorized facilities; and,
- Identify modifications which MDOT has made to roundabouts.

The significant observations of the site visits are detailed as followed:

US 23 at Lee

- Overall good yielding behavior between vehicles
- No non-motorized users noted
- May be some opportunity to improve signing and pavement markings to get drivers in correct lane before entering roundabout (identify final designation in conjunction with correct lane assignment), especially at the two western roundabouts



Source: Google

Whitmore Lake at Lee Road (west roundabout)


- Heavy truck use, trucks overlap into more than one lane when entering & circulating.
- Passenger vehicles stay back/give right-of-way

Lee Road at US 23 Southbound Ramps (middle roundabout)

- Some drivers heading westbound making southbound left (onto the southbound on-ramp), ignore spiral pavement markings, and remain in the inside lane. This results in drivers changing lanes (inside to outside) to make the exit onto the southbound on-ramp
- Some lane changing on thru movement-entering, circulating, and exiting
- One vehicle observed entering southbound on-ramp, making u-turn and proceeding wrong way back up ramp. This may be caused by the following:
 - At the Whitmore Lake and Lee Road roundabout, on the southbound approach, pavement markings for the middle lane (next to splitter island) indicate thru/left. The middle circulating lane is then spiraled out to the outside lane onto the US 23 southbound on-ramp. Therefore, southbound vehicles are forced/trapped onto southbound on-ramp. Upon entry, drivers in this lane may be confused as to the ultimate destination
 - At the Whitmore Lake and Lee Road roundabout, on the northbound approach, the right turn into the middle roundabout may be somewhat confusing for drivers. Drivers must cross the right-turn bypass lane and associated gore striping (for the southbound on-ramp) to enter the middle roundabout. Drivers may be turning onto the southbound on-ramp instead of the middle roundabout

Fieldcrest Road, Northbound US 23 Ramps at Lee Road (east roundabout)

- Most exiting vehicles into mall, cross lane line/change lanes while exiting (no other vehicle present in opposing lanes)
- Much lower volumes than at the Whitmore Lake and Lee Road, and Lee Road and US 23 Southbound Ramps intersections
- Noted several northbound failure to yield causing some vehicles in circulatory roadway to slow down/brake
- Observed one vehicle making u-turn on northbound on-ramp and proceeding wrong way back up ramp

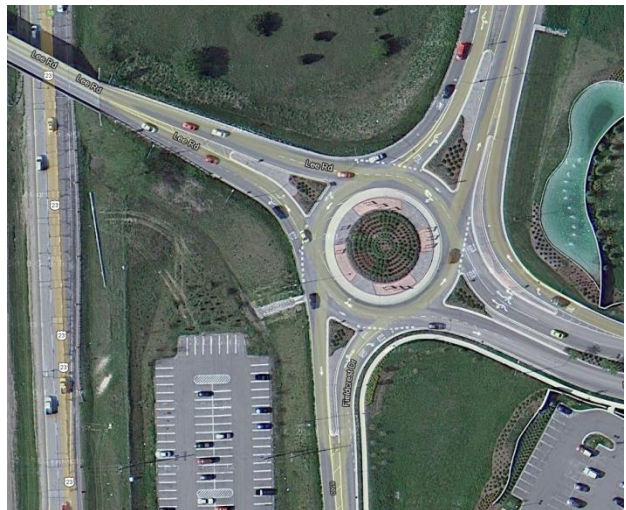

Source: Google

M-53/Van Dyke at 18.5 Mile Road

- Central island mounded approximately 12-15 feet and landscaped. Highly visible on approaches
- All approaches are posted 45 mph or higher
- All approaches have adequate intersection sight distance, allowing drivers to see conflicting traffic (from the left) from long distances— may result in higher than desirable approach speeds
- Overall good lane discipline and yielding behavior
- Some rutting is evident behind curbs at entry radii
- Numerous trucks using roundabout for u-turn
- Chevrons could be better aligned with approaching traffic upstream on eastbound approach
- Northbound queues up to ~7-9 vehicles, clear quickly



Source: Google

Northbound M-53 Ramps at 26 Mile Road

- Overall good lane discipline and yielding behavior
- Central island mounded ~6-8 feet
- M-53 has two northbound off-ramps entering the roundabout (loop and tight diamond). Highway sign indicates westbound traffic to use loop ramp for westbound 26 Mile Road movement (this improves capacity by removing left turns from the roundabout). Drivers were observed using both off-ramps to head westbound
- At date/time of observation very low percentage of traffic using right-turn bypass onto northbound on-ramp
- Traffic arriving in platoons on westbound approach, clears quickly
- Chevrons in central island not located in front of traffic upstream
- Roadway exiting signs should be better aligned to circulating traffic
- Noted three drivers in circulatory roadway yield to entering traffic




Source: Google

Southbound M-53 Ramps at 26 Mile Road

- Overall good lane discipline and yielding behavior
- Central island mounded ~6-8 feet
- Observed westbound to southbound (on-ramp) trucks using inside lane only and both lanes to make left. Typically tried to avoid using truck apron
- Westbound exiting traffic changing lanes on exit. Exit radius appeared to be narrow, vehicles had difficulty maneuvering
- Traffic arriving in platoons on eastbound and westbound approaches, clears quickly

M-46 at M-37


- Relatively high amount of truck traffic
- Central island flat, landscaped
- Eastbound entry speeds appear to be much greater than westbound entry speeds
- Splitter islands rolled curbs
- Relatively low traffic volumes during observation period
- Right-turn bypass lane separated by paint only
- South leg turns into dirt road with very low observed volumes
- Outside truck apron for right-turn bypass lane
- Westbound trucks use truck apron to make thru movement or cross southbound yield line to avoid using apron
- Narrow exit radii on westbound and northbound exits
- Chevron on westbound approach could be better aligned to face upstream traffic
- Southbound approach seems to have limited deflection

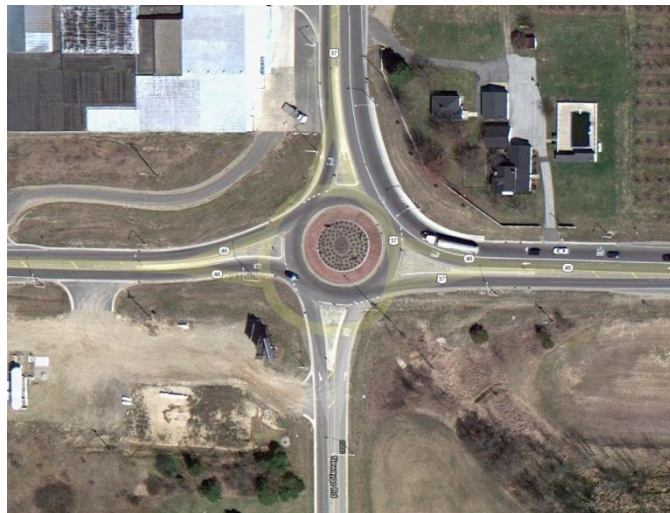

Source: Google

M-14 at Maple Road

- Overall good lane discipline and yielding behavior
- Excellent traffic operations
- Ann Arbor Skyline High School located just north of the M-14 roundabouts

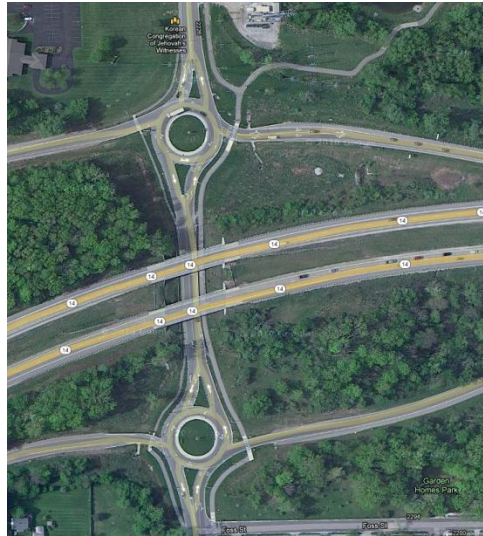

Source: Google

Westbound M-14 Ramps at Maple Road

- Northbound approach - drivers ignore yield, typically do not look to left due to lack of opposing traffic
- Pavement markings have been worn off and may need to be replaced
- High pedestrian volume as school lets out. Low vehicle traffic volumes at this time. Pedestrians cross westbound off-ramp with very low traffic volumes. No conflicts/delays noted during observation
- Southbound maximum queue approximately 7-9 vehicles as school lets out. Queue clears quickly
- Southbound exit has a very short 2 to 1 merge distance

Eastbound M-14 Ramps at Maple Road

- Pavement markings have been worn off and may need to be replaced
- Southbound approach - drivers ignore yield, typically do not look to left due to lack of opposing traffic
- The southbound and northbound exits have a very short 2 to 1 merge distance

Huron Parkway at Nixon Road


- High pedestrian volumes with large percentage of elderly pedestrians (senior housing near roundabout)
- On all legs, pedestrian crossings were identified with an overhead pedestrian (black on yellow) warning sign attached to a mast arm (pole located in splitter island). Rumble strips were also embedded in the roadway prior to the crosswalks to alert pedestrians of approaching vehicles
- Observed visually impaired pedestrian with a white cane cross east and south legs of roundabout. The visually impaired pedestrian crossed both legs with little to no hesitation. Approaching vehicles yielded where appropriate and waited for pedestrian to cross
- Overall pedestrian/vehicle interaction excellent. Pedestrians made eye contact with drivers before crossing. Drivers almost always yielded to pedestrians
- High volume of single unit trucks and large trucks (WB-50+). Semi-trucks used apron to make lefts
- No yield signs were present in the east and west leg splitter islands
- Outside truck aprons used for the southbound and northbound right turns. Observed one pedestrian on the truck apron in southeast quadrant
- Observed three failure to yield on southbound approach, resulting one near miss (circulating driver came to complete stop to avoid hitting entering driver). Drivers entering southbound at relatively high speed
- No northbound chevron/one way sign in central island
- Vehicle speeds appeared high for the westbound right turn movement, resulting in a lower yield rate
- Northbound exit radius appears to be narrow. Tire marks on curb and the curb was broken at exit
- Yield signs obstructed by mast pole/mast arms and pedestrian signs



Source: Google

Maple Road at Farmington Road

- Vehicles often seen to be changing lanes at exits and entries
- Central island mounded ~6-8 feet
- Drivers impatient, forcing gaps, changing lanes in circulating roadway and on exit
- No semi-trucks observed
- Some unbalanced lane use on westbound and eastbound approaches, drivers staying in inside lane once approach road widens to 3 lanes
- Approximately 6-8 pedestrians observed. Two used push buttons to activate HAWK signals. Others crossed mid-block or crossed at crosswalk without activating HAWK
- Approximately three drivers ignored flashing red indication when HAWK signal activated
- Two southbound approach lanes with three corresponding circulating lanes
- Aggressive driver behavior on westbound exit resulted in merge conflicts. Behavior included:
 - Drivers rapidly accelerating to get ahead of adjacent driver
 - Drivers forcing merge, driver in adjacent lane not giving space
 - Drivers changing lanes immediately after leaving circulatory roadway

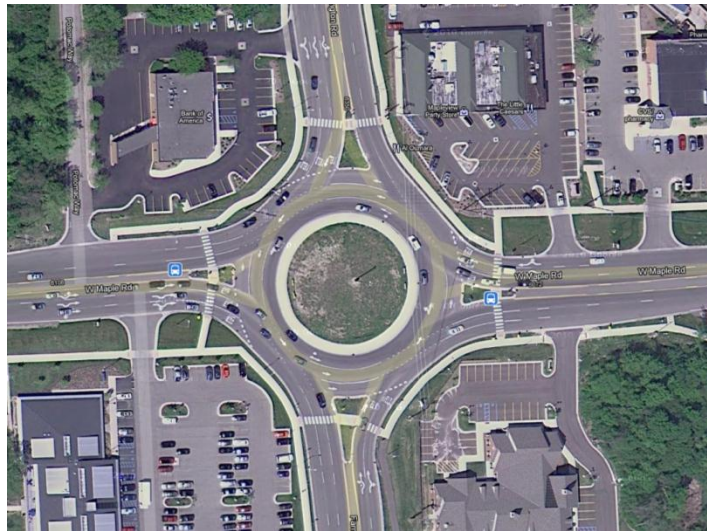

Source: Google

Maple Road at Drake Road

- Central island mounded ~6-8 feet
- Drivers impatient, forcing gaps, changing lanes in circulating roadway and on exit
- Low truck volumes
- Some unbalanced lane use on westbound and eastbound approaches, drivers staying in inside lane once approach road widens to 3 lanes
- Approximately 7-9 pedestrians observed. Two used push buttons to activate Rectangular Rapid Flashing Beacon (RRFB). Others crossed mid-block or crossed at crosswalk without activating beacons. One bicyclist entered roundabout, two others crossed thru parking lot

I-75 at M-81

- Overall excellent traffic operations/driver behavior
- High volume of trucks
- Trucks maneuver through roundabout with relative ease
- No trucks observed jumping curbs, but rutting is evident behind curbs at entry radii



Source: Google

US 127 at Mission Road

- Overall excellent traffic operations/driver behavior
- Very low traffic volumes at time of observation
- Roundabout signage on US 127 off-ramp alerts drivers to roundabout.
- Some driver hesitation – drivers not taking some of the available/adequate gaps, circulating drivers yielding to entering traffic. Resulted in one conflict, driver stopped in circulatory roadway, requiring driver following behind to come to a sudden stop

The Opus team also conducted a site visit of the M-41 at M-28 roundabout in Marquette, MI. The results of the site visit can be found in the Appendix of this report.

4.3 Collect Operational Data

Operational data was collected to be used in the operational analysis as well as the crash analysis and to get a better understanding of the overall operations at the roundabouts. Turning movement counts and ADT data was obtained from various sources, including several MDOT Regions, TSCs, individual cities, prior conducted studies, and county road commissions. Speed studies were also conducted to determine 85th percentile approach speeds for three different types of roundabouts:

- Multi-lane roundabout
- Single lane roundabout
- Interchange roundabout

Table 4.2 summarizes the results of the spot speed studies. Figure 4.1 demonstrates the locations of where the vehicle speeds for the speed studies were collected. The speeds were taken upstream of the roundabout to gauge the approaching speed of the vehicles. The markers are the

locations where the speeds were observed, and the lines represent the direction or path that the speeds were observed.

Figure 4.1: NB M-53 Ramps at 26 Mile Road Speed Study



Source: Google

Table 4.2: Roundabout Spot Speed Study

Intersection	Approach	85 th Percentile Speed (mph)	Posted Speed Limit (mph)
Maple Road at Drake Road	Northbound	46	45
	Eastbound	45	45
M-46/Apple Ave at M-37/Newaygo Rd	Southbound	57	55
	Westbound	60	55
NB M-53 Ramps at 26 Mile Road	Northbound	47	40*
	Westbound	47	50
	Eastbound	40	50

* = assumed value (NB M-53 is a freeway exit ramp)

The methodology for conducting the spot speed studies was as follows: The observer picked a safe location on the side of the roadway; the flow of traffic was not disturbed as to record vehicles travelling at free flow speeds. The observer targeted the travelling vehicle far enough ahead of them to lessen the angle between the observer and the travelling vehicle. If there is a substantial angle between the observer and the vehicle, there is a higher risk of inaccurate speeds being recorded. While using the radar gun it was imperative to single out only one vehicle to the best of the

observer's ability, the first vehicle should only be recorded if there is a platoon of vehicles. When tracking a vehicle with the radar gun, the highest speed was recorded. The speed study concluded when one hour of time had elapsed or 100 vehicles were observed, whichever occurred first. In other words, if there is a low volume of traffic at a roundabout, then the maximum time period spent at one location for a speed study was one hour.

The results of the speed study shows that the 85th percentile speed along the approaches at the various types of roundabouts was within 5 miles per hour (mph) of the posted speed limit, except at the northbound M-53 ramp approach at 26 Mile Road. There was no posted speed for this approach, as it is an exit ramp, and the speed limit was assumed to be 40 mph. These results suggest that speeding along the approaches to the roundabouts may not be a concern. The results of the speed analysis as well as the location of the studies can be found in the Appendix of this report.

4.4 Collect Conflict Data

Traffic conflicts are traffic events involving two or more road users where one or more road user takes evasive action to avoid a collision. Traffic conflict studies provide an effective way to supplement crash data in estimating the crash potential of an intersection. Traffic conflicts are more common than traffic crashes and are used as a key surrogate for safety performance. For a conflict to occur, the action of the first user places the other user, or users, on a collision course unless evasive action is taken by one or more of the road users. Collisions and near misses that occur without evasive maneuvers are also considered conflicts.

Four (4) roundabouts were selected, in conjunction with MDOT, to include different types of roundabouts. The roundabouts that were selected to collect conflict data were:

- M-46/Apple Avenue at M-37/Newaygo Road (single lane roundabout)
- NB M-53 Ramps at 26 Mile Road (interchange roundabout)
- SB M-53 Ramps at 26 Mile Road (interchange roundabout)
- M-53/Van Dyke Avenue at 18.5 Mile Road (multi-lane roundabout)

Traffic conflict data was conducted during various times throughout the day. At the date and time of the data collection the following observations were made:

M-46/Apple Avenue at M-37/Newaygo Road

No conflicts were observed, but the following observations were made:

- Relatively low traffic volumes during observation period
- Relatively high heavy vehicle percentage

NB M-53 Ramps & 26 Mile Road

No conflicts were observed, but the following observation was made:

- One driver observed making a u-turn on the northbound on-ramp and proceed wrong way back up ramp

SB M-53 Ramps & 26 Mile Road

Two conflicts were observed on the westbound approach:

- Five westbound drivers were observed entering the roundabout in the outside lane, once in the circulating roadway the driver proceeded to make a left turn cutting across the inside lane to enter onto the M-53 southbound on-ramp. One resulted in near miss, driver took evasive action (braking), and one resulted in driver slowing significantly and used their horn.

The following observation was also made:

- Westbound approach - drivers ignore yield, typically do not look to left due to lack of opposing traffic

M-53/Van Dyke Avenue & 18.5 Mile Road

Two conflicts were observed on the northbound approach:

- Two trucks entered roundabout without sufficient gaps, causing one vehicle in the circulatory roadway to slow down and one to come to a complete stop

5.0 Additional Data Collection

This section discusses the data required to conduct the safety analysis.

5.1 Data Requirements

The project team, in agreement with MDOT and the RAP, prepared a list of data requirements that were used in the roundabout evaluation:

- Crash data at study sites, before and after implementation
- Crash data at a group of similar reference sites
- Traffic volume at the treatment sites, before and after implementation
- Traffic volume at a group of similar reference sites, before and after implementation
- Geometric and operational characteristics of the treatment sites
- Geometric and operational characteristics of the reference sites
- Roundabout implementation dates
- Construction costs

Crash data for the study intersections for both before and after implementation, along with the crash data for the reference sites was obtained from the Michigan State Police TCRS. Traffic volume data was collected from partner agencies and from online resources, while other information (geometric characteristics, operational characteristics, implementation dates, and construction costs) were obtained from plans, field visits, project reports, and aerial photographs. This data was collected for both the study sites and the reference sites used in the EB analysis.

6.0 Safety Analyses

This section discusses the analysis of the crash data, including a simple before and after analysis, the development of a Michigan Roundabout Safety Performance Function (SPF), the Empirical Bayes (EB) analysis used to develop Crash Reduction Factors (CRFs), the operational impacts of roundabouts, and the economic analysis of the roundabout implementation.

6.1 Simple Before and After Analysis

A simple before and after analysis was conducted to determine the impacts that roundabouts have on various crash characteristics for roundabouts which were conversions. The year of construction was not included in the analysis period. Table 6.1 shows the annual average crash frequency for the roundabouts for the “before” period and the “after” period, for both total and injury crashes. An injury crash is defined as a crash where the most severe consequence was an injury. Table 6.1 has separate sections for single lane, double lane, and triple lane roundabouts, as well as a total for all roundabouts. The construction year was omitted from the analysis. Additional crash data, including the length of the “before” and “after” periods, can be found in the Appendix of this report.

Table 6.1: Simple Comparison of Average Annual Crash Rates Before and After Conversion

Intersection	Average Total Crashes “Before”	Average Total Crashes “After”	Average Injury Crashes “Before”	Average Injury Crashes “After”	Average Fatal & A-Level Crashes “Before”	Average Fatal & A-Level Crashes “After”
SINGLE LANE ROUNDABOUTS						
3rd St & Western Ave	1.60	2.00	0.00	0.25	0.00	0.00
7 Mile Rd & Brewer Ave	2.17	1.00	0.50	0.00	0.00	0.00
Bennett Rd & Hulett Rd	8.33	4.50	3.67	0.50	0.00	0.00
Cherry St & Jefferson Ave	3.67	1.33	1.33	0.00	0.17	0.00
Cooley Lake Rd & Bogie Lake Rd	15.67	12.67	5.00	1.33	1.00	0.33
Cooley Lake Rd & Oxbow Lake Rd	2.83	4.33	0.50	0.67	0.17	0.00
Hamburg Rd & Winans Lake Rd	6.13	3.00	0.88	0.00	0.13	0.00
Hayes Rd & 25 Mile Rd	5.75	7.20	1.25	0.40	0.25	0.00
I-94 Business (Main St) & 5th St	2.13	0.00	0.00	0.00	0.13	0.00
I-94 Business (Main St) & Riverview Dr	5.25	1.00	0.00	0.00	0.25	0.00
M-46/Apple Ave & M-37/Newaygo Rd	5.75	2.00	1.75	0.00	0.50	0.00
Main St & 3rd St	4.50	3.57	0.50	0.29	0.00	0.00
Michigan Ave & Washington Square	7.33	5.00	0.33	0.33	0.00	0.00
Nixon Rd & Huron Pkwy	3.25	1.00	0.75	0.00	0.00	0.00
Old US-27/North Hwy & Livingston Blvd	1.80	1.75	0.20	0.25	0.00	0.00
US-127 BR & Mission St	0.50	0.00	0.00	0.00	0.00	0.00
Wealthy St & Jefferson Ave	18.57	8.50	4.86	1.00	0.29	0.00
Wealthy St & Lafayette Ave	1.14	0.00	0.00	0.00	0.00	0.00

Intersection	Average Total Crashes "Before"	Average Total Crashes "After"	Average Injury Crashes "Before"	Average Injury Crashes "After"	Average Fatal & A-Level Crashes "Before"	Average Fatal & A-Level Crashes "After"
Willow Hwy & Canal Rd	2.86	3.50	0.00	0.50	0.00	0.00
I-75 SB off ramp & M-81/Washington	1.00	0.00	0.00	0.00	0.00	0.00
I-75 NB off ramp & M-81/Washington	5.20	0.50	0.80	0.00	0.00	0.00
Total	123.40	62.85	26.91	5.52	2.87	0.33
DOUBLE LANE ROUNDABOUTS						
68th Ave & Randall St/ State	8.00	9.00	1.50	1.00	0.17	0.00
Baldwin Rd/Indianwood & S. Coats	11.67	10.67	2.00	1.17	0.00	0.00
Cedar St & Holbrook Dr	2.38	4.00	0.13	1.00	0.00	0.00
Geddes Rd & Superior Rd	0.14	0.50	0.00	0.00	0.00	0.00
Lake Lansing Rd & Chamberlain Dr	4.17	6.67	0.83	1.33	0.00	0.33
Michigan Ave & Rankin St	11.33	4.67	1.67	0.50	0.33	0.00
Romeo Plank Rd & 19 Mile Rd	4.71	8.50	0.86	0.50	0.00	0.50
Romeo Plank Rd & Cass Ave	7.43	15.50	1.71	1.00	0.00	0.00
Utica Rd & Dodge Park Rd	13.63	5.00	1.38	0.00	0.00	0.00
Wood St & Sam's Way	1.17	4.33	0.17	1.00	0.17	0.67
M-53 SB off ramp & 26-Mile	11.50	4.00	2.63	0.00	0.25	0.00
M-53 NB off ramp & 26-Mile	2.00	3.00	0.50	0.00	0.00	0.00
Maple Rd & M-14 EB off ramp	2.83	6.67	1.50	0.67	0.17	0.00
Maple Rd & M-14WB off ramp	7.00	5.33	1.67	0.67	0.00	0.00
Total	106.39	87.83	20.45	8.83	1.08	1.50
TRIPLE LANE ROUNDABOUTS						
14 Mile Rd & Farmington Rd	36.43	57.50	8.57	3.00	0.50	0.00
Maple Rd & Drake Rd	32.33	67.33	6.33	4.67	0.17	0.33
Maple Rd & Farmington Rd	40.67	60.33	6.67	4.33	0.20	0.50
Whitmore Lake Rd & Lee Rd	5.80	39.75	1.40	2.50	0.20	0.00
US-23 SB off ramp & Lee Rd	11.40	17.75	1.80	0.00	0.20	0.00
US-23 NB off ramp & Lee Rd	2.80	8.50	0.80	0.00	0.71	0.00
Total	36.43	57.50	8.57	3.00	1.98	0.83
ALL ROUNDABOUTS						
GRAND TOTAL	322.80	401.85	64.42	28.85	9.89	4.50

Table 6.1 demonstrates that both single lane and double lane roundabouts saw a reduction in total crashes and injury crashes. However, the triple lane roundabouts saw an increase in total crash frequency, but a decrease in injury crashes. Overall the average change in total crashes is a 49% decrease for single lane, 17% decrease for double lane and a 61% increase for triple lane. For injury crashes the average change is a 79% decrease for single lane, a 57% decrease for double lane and a 51% decrease for triple lane. For fatal and A-Level crashes the average change is an 88% decrease for single lane, a 38% increase for double lane, and a 56% decrease for triple lane. It should be kept in

mind that these results do not account for regression-to-the-mean, traffic volumes or the decreasing time trend in crashes in Michigan so these results should not be used to make conclusions about the effectiveness of roundabouts in Michigan. The analysis in Section 6.2 addresses these confounding factors.

6.2 Detailed Crash Statistics


The crash data utilized in this section contains the roundabouts in Table 6.1. It should be noted that the “before” and “after” periods represented in the following table and figures are not of equal length.

For single and double lane roundabouts listed in Table 6.1, Table 6.2 and Figure 6.1 contain information comparing the severity of the crashes before and after roundabout construction. In the “before” period, over 20% of the crashes resulted in an injury or a fatality. In the “after” period slightly above 10% of the crashes resulted in an injury or a fatality. There were also five fatalities (0.37%) observed in the “before” period and in the “after” period there were no observed fatal crashes.

Table 6.2: Single and Double Lane Roundabout Crash Severity Values

Severity Type	“Before” Severity		“After” Severity	
Fatal	5	0.43%	0	0.00%
A-Level	20	1.71%	5	1.08%
B-Level	65	5.57%	12	2.60%
C-Level	160	13.71%	30	6.49%
PDO	917	78.58%	415	89.83%
Total	1167	100.00%	462	100.0%

Figure 6.1: Single and Double Lane Roundabout “Before” and “After” Crash Severity

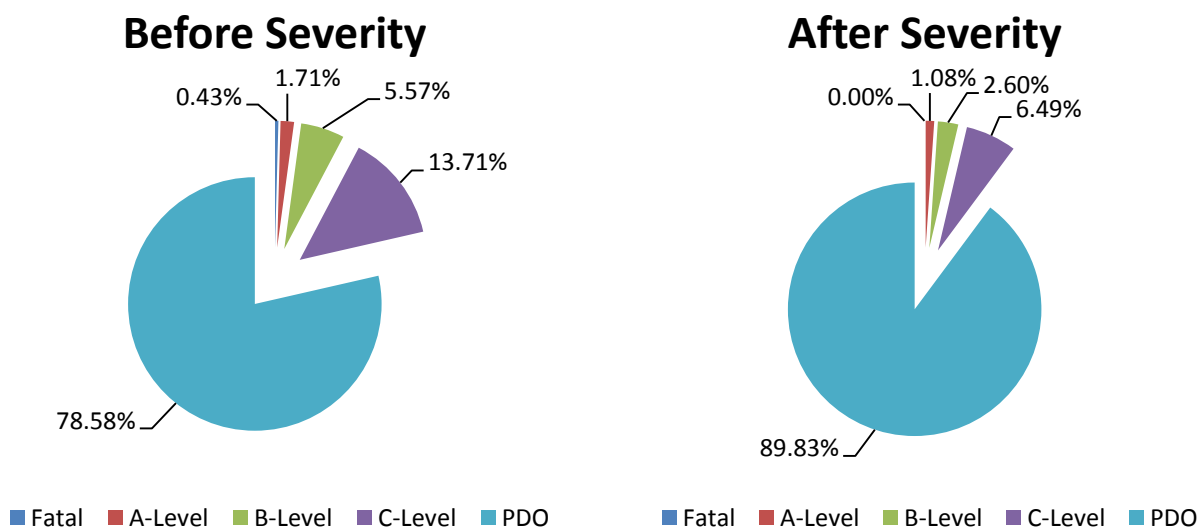


For single and double lane roundabouts listed in Table 6.1, Table 6.3 and Figure 6.2 contain information comparing the crash types of the crashes before and after roundabout construction for single and double lane roundabouts. The largest change in the crash types came from the crash types that often result in the greatest severity of crashes (angle, head-on, head-on left turn, pedestrian, and bike). Most notably, the percent of angle crashes was reduced by over 10%. This number may also be greater than 10%, because a common error in recording crash types is mistaking sideswipe crashes as angle crashes especially since an angle crash cannot occur in a roundabout.

Table 6.3: Single and Double Lane Roundabout Crash Type Values

Crash Type	"Before" Type		"After" Type	
Angle	321	27.51%	79	17.10%
Head On	9	0.77%	2	0.43%
Head On Left turn	46	3.94%	4	0.87%
Pedestrian	16	1.37%	4	0.87%
Bike	13	1.11%	2	0.43%
Rear-end	377	32.31%	141	30.52%
Single Vehicle	24	2.06%	8	1.73%
Sideswipe Opposite	26	2.23%	8	1.73%
Sideswipe Same	107	9.17%	92	19.91%
Other	228	19.54%	122	26.41%
Total	1167	100.00%	462	100.00%

Figure 6.2: Single and Double Lane Roundabout "Before" and "After" Crash Type

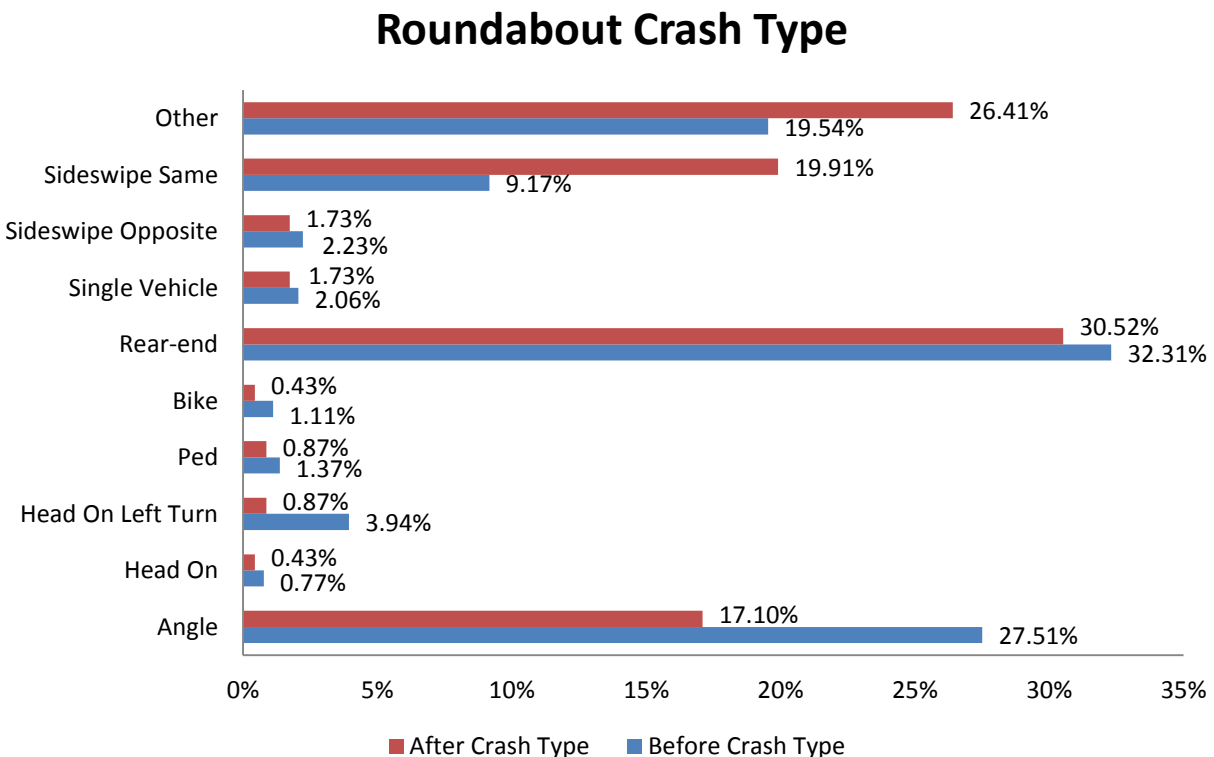


For single and double lane roundabouts listed in Table 6.1, Table 6.4 and Figure 6.3 contain information comparing the lighting conditions before and after roundabout construction for single and double lane roundabouts. The results of the analysis show that the percent of crashes that occurred during the daytime remained almost the same in the “before” and “after” conditions (73.81% “before” versus 72.08% “after”). A larger percent of crashes occurred during “dark, lighted” conditions in the “after” period (16.45%) than in the “before” period (12.00%). Despite the lighting requirements at roundabout intersections, almost the same percent of crashes occur during the nighttime conditions in the “before” condition as they do in the “after” condition (26.39% “before” versus 27.92% “after”).

Table 6.4: Single and Double Lane Roundabout Crash Lighting Condition Values

Lighting	“Before”		“After”	
Daylight	859	73.61%	333	72.23%
Dawn	27	2.31%	11	2.39%
Dusk	30	2.57%	7	1.52%
Dark, Lighted	140	12.00%	76	16.49%
Dark, Unlighted	96	8.23%	34	7.38%
Other	15	1.29%	0	0.00%
Total	1167	100.00%	462	100.00%

Figure 6.3: Single and Double Lane Roundabout “Before” and “After” Crash Lighting Conditions

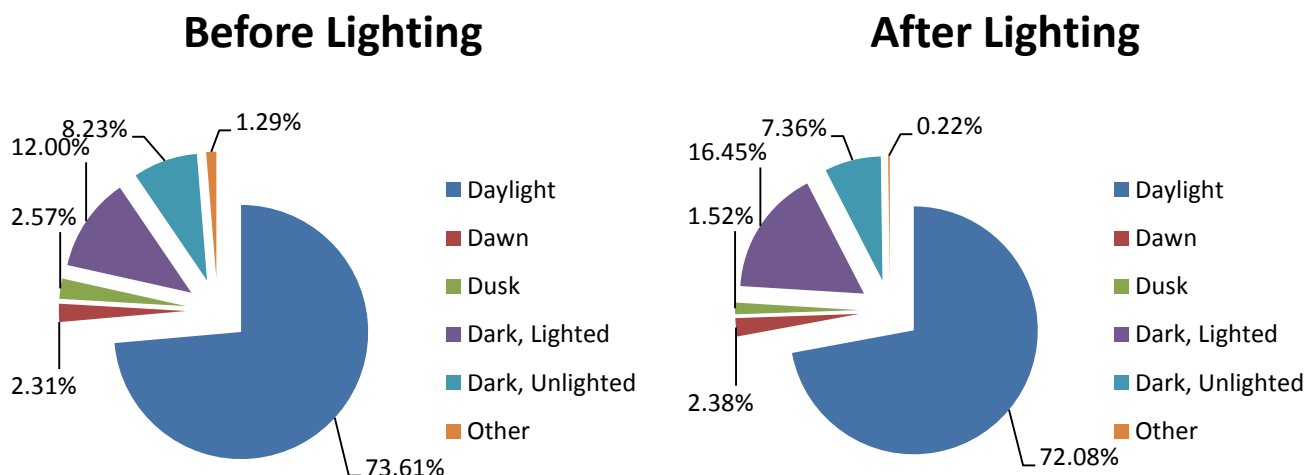

For triple roundabouts listed in Table 6.1, Table 6.5 and

Figure 6.4 contain information comparing the severity of the crashes before and after roundabout construction. In the “before” period, 19.92% of the crashes resulted in an injury or a fatality. In the “after” period only 5.64% of the crashes resulted in an injury or a fatality. There were no observed fatalities in either the “before” or “after” time periods.

Table 6.5: Triple Lane Roundabout Crash Severity Values

Severity Type	"Before" Severity		"After" Severity	
Fatal	0	0.00%	0	0.00%
A-Level	12	1.51%	3	0.39%
B-Level	23	2.90%	8	1.05%
C-Level	123	15.51%	32	4.20%
PDO	635	80.08%	719	94.36%
Total	793	100.00%	762	100.00%

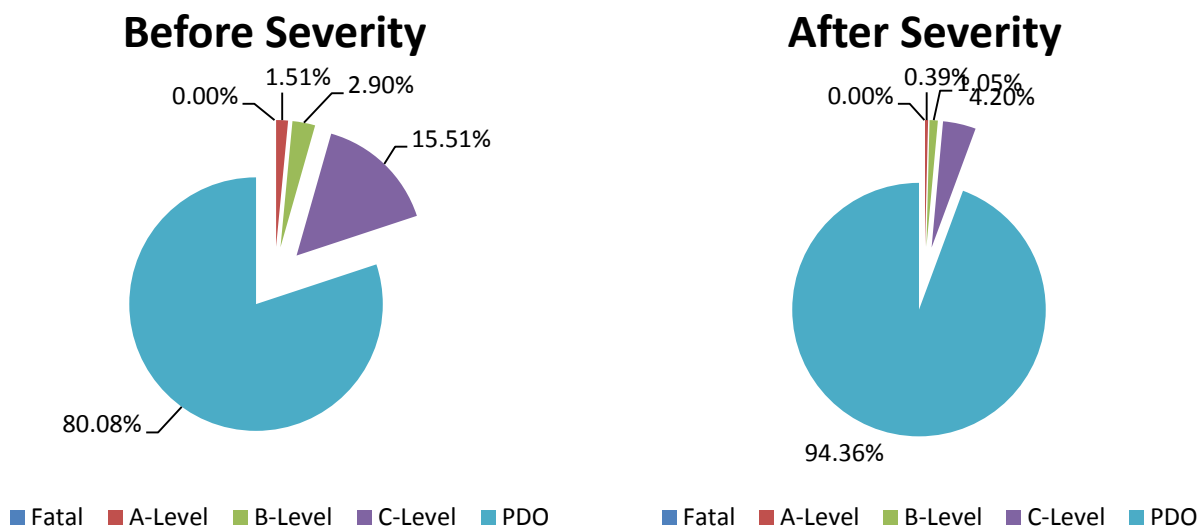
Figure 6.4: Triple Lane Roundabout "Before" and "After" Crash Severity

Table 6.6 and Figure 6.5 contain information comparing the crash types of the crashes before and after roundabout construction for triple lane roundabouts. The largest change in the crash types came from the rear-end crash types. 52.08% of the crashes in the "before" period were rear-end type crashes and 22.18% of the crashes in the "after" period were rear-end type crashes. It is also important to note that the Sideswipe Same crashes increased from only 5.42% in the "before" period to 44.36% in the "after" period.

Table 6.6: Triple Lane Roundabout Crash Type Values

Crash Type	"Before" Type		"After" Type	
Angle	174	21.94%	177	23.23%
Head On	10	1.26%	7	0.92%
Head On Left turn	37	4.67%	0	0.00%
Pedestrian	0	0.00%	0	0.00%
Bike	1	0.13%	1	0.13%
Rear-end	413	52.08%	169	22.18%
Single Vehicle	3	0.38%	0	0.00%
Sideswipe Opposite	18	2.27%	24	3.15%
Sideswipe Same	43	5.42%	338	44.36%
Other	94	11.85%	46	6.04%
Total	793	100.00%	762	100.00%

Figure 6.5: Triple Lane Roundabout "Before" and "After" Crash Type

Roundabout Crash Type

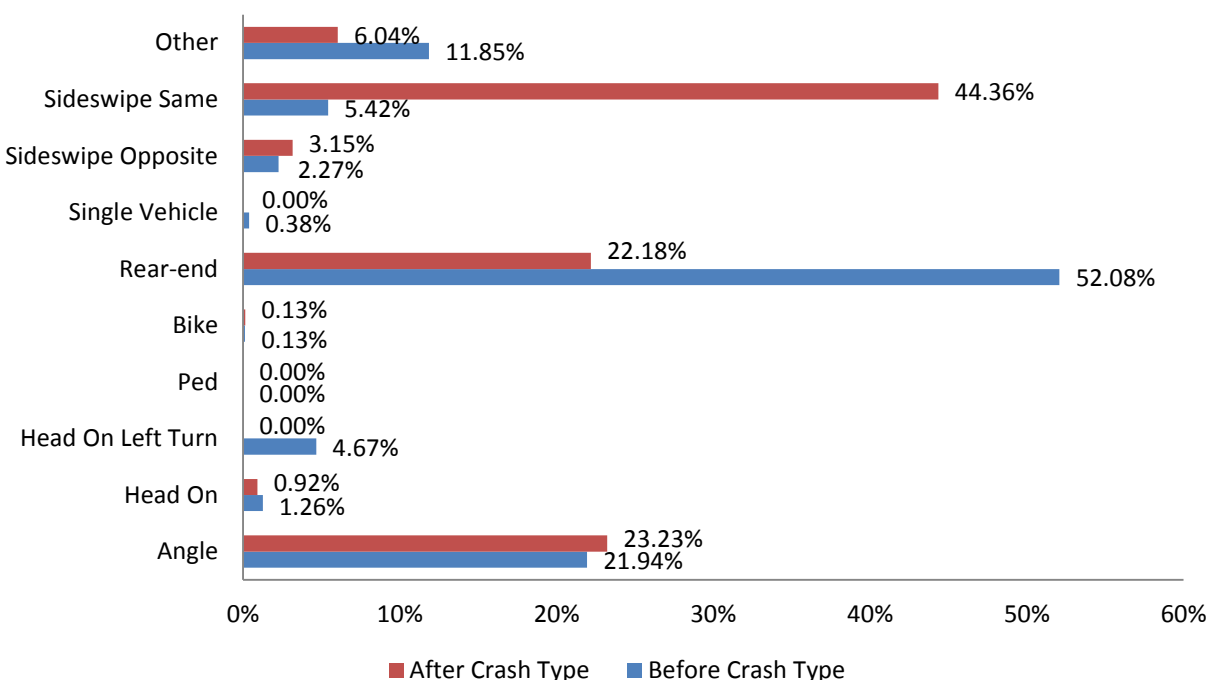
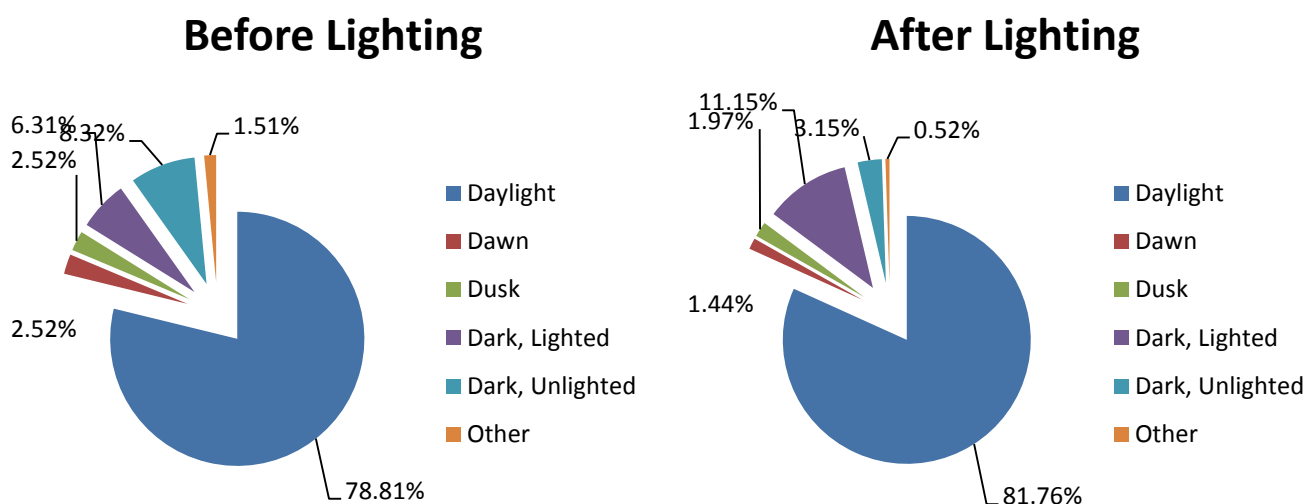


Table 6.7 and Figure 6.6 contain information comparing the lighting conditions before and after roundabout construction for triple lane roundabouts. The results of the analysis show that the percent of crashes that occurred during the daytime remained almost the same in the "before" and "after" conditions (78.81% "before" versus 81.76% "after"). A larger percent of crashes occurred during "dark, lighted" conditions in the "after" period (11.15%) than in the "before" period (6.31%). Despite the lighting requirements at roundabout intersections, almost the same percent of crashes occur during the nighttime conditions in the "before" condition as they do in the "after" condition (21.19% "before" versus 18.24% "after").

Table 6.7: Triple Lane Roundabout Crash Lighting Condition Values

Lighting	"Before"		"After"	
Daylight	625	78.81%	623	81.76%
Dawn	20	2.52%	11	1.44%
Dusk	20	2.52%	15	1.97%
Dark, Lighted	50	6.31%	85	11.15%
Dark, Unlighted	66	8.32%	24	3.15%
Other	12	1.51%	4	0.52%
Total	793	100.00%	762	100.00%

Figure 6.6: Triple Lane Roundabout "Before" and "After" Crash Lighting Conditions

Additional analysis of the simple "before" and "after" crash patterns can be found in the Appendix of this report.

6.3 Empirical Bayes Analysis to Develop Crash Reduction Factors

The objectives of this part of the study was to develop Crash Modification Factors (CMFs) for several pre- and post- conversion conditions. A CMF is a multiplicative factor used to compute the expected number of crashes after implementing a given countermeasure at a specific site. The CMF is multiplied by the expected crash frequency without treatment. A CMF greater than 1.0 indicates an expected increase in crashes, while a value less than 1.0 indicates an expected reduction in crashes after implementation of a given countermeasure. For example, a CMF of 0.8 indicates an expected safety benefit; specifically, a 20 percent expected reduction in crashes. A CMF of 1.2 indicates an expected degradation in safety; specifically, a 20 percent expected increase in crashes.

6.3.1 Data Collection

The data collected was filtered to remove sites that did not have the required data to be included in the analysis. Certain sites were excluded from the EB analysis because it lacked information on the following criterion:

- lack of conversion date
- recent conversion, thus no after period data available
- lack of AADTs for one or more roadways
- lack of information on previous traffic control
- lack of crash data

The following locations were not used because of their unique geometry. Using these sites in developing the CMFs would bias the results.

- Whitmore Lake Rd & Lee Road
- SB US-23 & Lee Road
- NB US-23 & Lee Road (due to the close proximity of the double roundabout)

Table 6.8: Locations Used for Empirical Bayes Analysis

Intersection	City
I-94 Business (Main St) & Riverview Dr	Benton Harbor
I-94 Business (Main St) & 5th St	Benton Harbor
US-127 BR & Mission St	Clare
Willow Hwy & Canal Rd	Delta Charter Twp
Bennett Rd & Hulett Rd	Okemos
Lake Lansing Rd & Chamberlain Dr	Lansing
Wood St & Sam's Way	Lansing
Michigan Ave & Washington Square	Lansing
Cedar St & Holbrook Dr	Holt
Mosher St & Main St	Mt Pleasant
Michigan Ave & Rankin St	Kalamazoo
Cherry St & Jefferson Ave	Grand Rapids
Wealthy St & Lafayette Ave	Grand Rapids
Wealthy St & Jefferson Ave	Grand Rapids
7 Mile Rd & Brewer Ave	Plainfield
Hamburg Rd & Winans Lake Rd	Brighton
Main St & 3rd St	Brighton
Hayes Rd & 25 Mile Rd	Shelby Township
Romeo Plank Rd & 19 Mile Rd	Macomb Township
Romeo Plank Rd & Cass Ave	Clinton Township
Utica Rd & Dodge Park Rd	Sterling Heights
SB M-53 ramp & 26-Mile	Utica
NB M-53 ramp & 26-Mile	Utica

Intersection	City
M-46/Apple Ave & M-37/Newaygo Rd	Casnovia
3rd St & Western Ave	Muskegon
Maple Rd & Drake Rd	West Bloomfield Twsp
Maple Rd & Farmington Rd	West Bloomfield Twsp
14 Mile Rd & Farmington Rd	Farmington Hills
Cooley Lake Rd & Bogie Lake Rd	White Lake
Cooley Lake Rd & Oxbow Lake Rd	White Lake
Baldwin Rd/Indianwood Rd & S. Coats Rd	Orion
Old US-27/North Hwy & Livingston Blvd	Gaylord
68th Ave & Randall St/ State	Coopersville
SB I-75 & M-81/Washington Road	Saginaw
NB I-75 & M-81/Washington Road	Saginaw
Nixon Rd & Huron Pkwy	Ann Arbor
Geddes Rd & Superior Rd	Ypsilanti
Maple Rd & EB M-14	Ann Arbor
Maple Rd & WB M-14	Ann Arbor

Crash data were provided by the Michigan State Police TCRS. Injury crashes were defined as all those which resulted in either a fatal or non-fatal injury. Prior to conversion to a roundabout, crash data within 150ft. from the center of the intersection was included. As a roundabout, crash data within the roundabout and 150ft. from the outside diameter were included, thus the influence area for crashes at a roundabout are slightly larger than prior to conversion. The impact of this may be some underestimation of the expected benefits of roundabout conversion. Descriptive statistics for the 39 treatment and 110 reference sites analyzed are provided in the Table 6.9 and Table 6.10.

Table 6.9: Summary Statistics for Selected Treatment Sites

Variable	minimum	maximum	mean	Frequency
Years before	2	8	6.26	
Years after	1	7	2.74	
Environment				Rural - 19 Urban - 20
Number of approaches				3 - 16 4 - 23
Traffic control pre-conversion				Stop-control - 19 All-way stop-control - 6 Signalized - 14
Major road AADT before	1,000	26,011	11,927	
Major road AADT after	1,000	26,366	11,181	
Minor road AADT before	500	18,220	5,600	
Minor road AADT after	500	13,750	4,977	

Variable	minimum	maximum	mean	Frequency
Circulating lanes post-conversion				1 - 20 2 - 16 3 - 3
Total crashes/year before	0.14	47.50	7.83	
Total crashes/year after	0.00	67.33	9.43	
Injury crashes/year before	0.00	8.57	1.63	
Injury crashes/year after	0.00	4.67	0.68	

Table 6.10: Summary Statistics for 110 Reference Sites

Variable	minimum	maximum	average
Years	10	10	10
Environment			Rural - 61 Urban - 49
Number of approaches			3 - 36 4 - 74
Traffic control			Yield - 0 Stop-control - 30 All-way stop-control - 30 Signalized - 50
Major road AADT	11,290	27,400	15,959
Minor road AADT	1,680	14,810	7,056
Total crashes/year	0.10	25.10	6.29
Injury crashes/year	0.00	5.90	1.46

Table 6.11 provides similar statistics for the roundabout locations used to build the roundabout SPFs. These data include the sites used for the “before”-“after” study plus those roundabouts which were new construction. Triple lane roundabouts were not included in these data due to their limited number and the concerns raised with respect to their operation.

Table 6.11: Summary Statistics for 48 as Roundabout Sites

Variable	minimum	maximum	mean	Frequency
Years	1.00	10.00	3.78	
Environment				Rural - 25 Urban - 23
Number of approaches				3 - 22 4 - 26
Major road AADT	1,000	26,366	9,044	
Minor road AADT	340	13,750	3,603	
Circulating lanes				1 - 30 2 - 18
Total crashes/year	0.00	15.50	3.58	
Total crashes/year	0.00	1.33	0.36	

6.3.2 Development of Reference Group SPFs and Yearly Calibration Factors

This section presents the safety performance functions (SPFs) applied. The SPFs are used in the EB methodology to estimate the safety effectiveness in “before”-“after” studies.

The reference site data were used in an attempt to estimate the required SPF coefficients, assuming a negative binomial error distribution, which is consistent with the state of art research in developing these models. Separate models were sought for both total and injury crashes disaggregated by the number of approaches and traffic control. However, due to the relatively small numbers of sites in each category, these modeling attempts were not successful. The attempted models did not converge with parameter estimates statistically significant at the 90% confidence interval or greater and were thus rejected.

Since models calibrated using the reference group were not successfully calibrated, it was sought to recalibrate existing SPFs using the procedure recommended in the Highway Safety Manual. In this procedure, the ratio of the sum of the crash counts to the sum of the SPF estimates for a reference group in the jurisdiction of interest is applied as a multiplier in the regression equation. The overdispersion parameter, k , is also re-estimated when the recalibrated model is applied to the reference site data using a maximum log-likelihood procedure. This step is critical since the overdispersion parameter is used in the EB method and in effect indicates how well the model is explaining the variation in crash counts in the data. For recalibration, for each site the sum of crashes over all years and the average AADT for the same time period was used.

The decision on which of the available SPFs to adapt for use in a jurisdiction is based on two main considerations. The first is what data are available for the sites that were treated. While some SPFs only require knowledge of traffic volumes, others may require detailed knowledge of geometric design features. The second consideration is which SPF provides the best fit to the reference group data through an assessment of the cumulative residuals by constructing plots of the cumulative residuals versus the predictor variables (CURE Plots).

The models selected for application are those developed for intersections for the AASHTO *SafetyAnalyst* tool. The number of reference sites would not permit separate recalibrations for urban and rural roads so both the rural and urban SPFs were evaluated and the SPF with the better fit to the data selected for each category. For all-way stop-controlled intersections the SPF for injury crashes was obtained by multiplying the constant term for the total crash SPF by the observed proportion of injury crashes in the reference group data.

SPFs for total and injury crashes were recalibrated for the following site types:

- 3-legged stop-controlled
- 3-legged all-way stop-controlled
- 3-legged signalized
- 4-legged stop-controlled
- 4-legged all-way stop-controlled
- 4-legged signalized

The recalibration of the models was successful in that the re-estimated overdispersion parameters were all reasonable and the CURE plots indicated a reasonable fit to the data. The original models, calibration factors and re-estimated overdispersion parameters (k) are provided in Table 6.12 and Table 6.13. CURE plots are provided in the Appendix.

The model form for all models is: $Crashes/year = exp^{\alpha}(MajAADT)^{\beta_1}(MinAADT)^{\beta_2}$

Where,

MajAADT = major road AADT

MinAADT = minor road AADT

Table 6.12: SafetyAnalyst Models for Intersections

Model	α	β_1	β_2	k
Total Crashes				
3-legged stop-controlled (urban)	-5.35	0.34	0.28	0.46
3-legged all-way stop-controlled (rural)	-12.37	1.22	0.27	0.53
3-legged signalized (rural)	-6.57	0.66	0.20	0.70
4-legged stop-controlled (urban)	-3.12	0.27	0.16	0.60
4-legged all-way stop-controlled (rural)	-12.37	1.22	0.27	1.09
4-legged signalized (rural)	-6.57	0.66	0.20	0.51
Injury Crashes				
3-legged stop-controlled (urban)	-8.45	0.49	0.39	0.36
3-legged all-way stop-controlled (rural)	-13.68	1.22	0.27	0.50
3-legged signalized (rural)	-7.83	0.75	0.14	0.50
4-legged stop-controlled (urban)	-4.35	0.29	0.19	0.34
4-legged all-way stop-controlled (rural)	-13.76	1.22	0.27	0.80
4-legged signalized (rural)	-7.83	0.75	0.14	0.74

Table 6.13: Calibration Factors and Re-estimated Overdispersion Parameters

Model	Total Crash Calibration Factor	Injury Crash Calibration Factor	k for Total Crashes	k for Injury Crashes
3-legged stop-controlled	6.63	3.11	0.46	0.36
3-legged all-way stop-controlled	2.14	2.11	0.53	0.56
3-legged signalized	0.84	0.44	0.70	0.50
4-legged stop-controlled	4.65	2.40	0.60	0.34
4-legged all-way stop-controlled	4.12	4.10	1.09	1.05
4-legged signalized	1.53	0.93	0.51	0.74

To account for time trends in the EB procedure the models are also recalibrated for each year of data. Similarly to deriving the calibration factor for the SPFs, these recalibrated models are now re-applied to the reference site data but now predicting for one year of data at a time. The sum of observed crashes is divided by the sum of predictions to derive a yearly multiplier to be applied to the model.

Because of small sample sizes the reference sites were combined by traffic control when deriving these factors. The yearly factors so derived are shown in Table 6.14.

Table 6.14: Yearly Multipliers

Site Type	Model	2001	2002	2003	2004	2005
Stop-controlled	Total Crashes	1.100	1.214	1.124	1.114	1.005
Stop-controlled	Injury Crashes	1.119	1.207	1.273	0.878	1.097
AWSC	Total Crashes	1.050	1.213	1.081	1.013	1.039
AWSC	Injury Crashes	1.220	1.494	1.115	1.031	0.947
SIGNAL	Total Crashes	1.116	1.192	1.106	1.068	0.975
SIGNAL	Injury Crashes	1.278	1.263	1.205	1.087	0.940
Site Type	Model	2006	2007	2008	2009	2010
Stop-controlled	Total Crashes	0.972	0.920	0.891	0.749	0.910
Stop-controlled	Injury Crashes	0.966	0.812	0.944	0.966	0.746
AWSC	Total Crashes	1.002	0.902	1.018	0.812	0.876
AWSC	Injury Crashes	0.884	0.820	0.968	0.799	0.715
SIGNAL	Total Crashes	0.866	0.927	0.855	0.893	0.999
SIGNAL	Injury Crashes	0.852	0.837	0.852	0.764	0.896

6.3.3 “Before”-“After” Study Results and Discussion

The results from the EB “before”-“after” analysis are shown in Table 6.15 for conversions grouped by the “before” period setting. For comparison and confirmation, the results of the naïve “before”-“after” analysis for the main groups are presented in Table 6.16. The main reason for differences between the naïve results and EB results is that the significant time trend indicated by state-wide crash statistics is not accounted for in the naïve study. Nevertheless, considering this key difference between the two studies, the general indication is that the naïve results are consistent with, and do corroborate the EB results. The remaining discussion is based on the EB results in Table 6.15.

These point estimate results show increases in total crashes for all groups, except for conversions from signalized to one or two lane roundabouts. The largest increases in crashes were at conversions from signalized to 3-lane roundabouts (3 sites). By contrast, there are reductions in injury crashes for all groups. However, the reduction in injury crashes, when taken in the context of the substantial increases in all crashes, may or may not indicate a net crash cost benefit. For example, for the group that was signalized before and converted to 3-lane roundabouts, the numbers suggest that the reduction in injury crashes of 7.88 seems unlikely to outweigh the increase of $(498-251.83+7.88) = 254.05$ in non-injury crashes, given, for example, that the ratio of injury to non-injury FHWA crash costs is about 13 based on roads with speed limits < 45 mi/h.¹⁶). By contrast, for the 19 intersections that were stop-controlled before, the 44.2% reduction in injury crashes amounted to a reduction of $(58.42-33) = 28.42$ in such crashes, which if multiplied by the ratio of crash costs of 13 is larger than the $(294-262.19+28.42) = 60.23$ increase in non-injury crashes. Thus, there was a net crash cost bene-

¹⁶ Council, F., E. Zaloshnja, T. Miller, and B. Persaud (2005). Crash Cost Estimates by Maximum Police-Reported Injury Severity within Selected Crash Geometries. Federal Highway Administration Report FHWA-HRT-05-051, McLean, VA.

fit for this group. Similar calculations would indicate there is a net crash cost benefit (based on the FHWA crash cost) for all other groups in Table 6.15.

The final two columns in Table 6.15 indicate that crash benefits were attained at a substantial number of roundabouts. However, caution should be exercised in labeling an individual roundabout as a success or failure in terms of crash effects since these effects are generally subject to large variances.

Table 6.15: Results from the Empirical Bayes “Before”-“After” Analysis

Site Type by Condition before conversion	Sites	Accidents recorded in after period		EB estimate of accidents expected after without roundabouts		Point estimate of the % change in crashes		CMF (standard error of mean)		Number and percent of sites with a reduction in accidents	
		All	Injury	All	Injury	All	Injury	All	Injury	All	Injury
All sites	39	962	80	714.32	136.68	+34.6	-41.7	1.346 (0.059)	0.583 (0.074)	20 (51%)	34 (87%)
All sites minus triple lane	36	464	47	462.49	95.80	+2.0%	-51.2	1.002 (0.062)	0.488 (0.080)	20 (57%)	31 (86%)
One or two way Stop-controlled (All)	19	294	33	262.19	58.42	+11.7	-44.2	1.117 (0.096)	0.558 (0.114)	8 (42%)	16 (84%)
One or two way stop controlled at interchange	4	43	4	34.22	9.32	+24.7	-58.1	1.247 (0.218)	0.419 (0.214)	1 (25%)	4 (100%)
One or two way stop controlled not at interchange	15	251	29	227.97	49.10	+9.5	-41.9	1.095 (0.095) (0.105)	0.581 (0.130) (0.881)	7 (47%)	11 (73%)
All-way stop-controlled	6	53	5	51.29	7.60	+2.6	-36.4	1.026 (0.163)	0.636 (0.298)	3 (50%)	5 (83%)
Signalized (minus triple lane)	11	117	9	149.01	29.77	-21.7	-70.0	0.783 (0.081)	0.300 (0.103)	9 (82%)	11 (100%)
Signalized to 3 lane roundabout	3	498	33	251.83	40.88	+97.5	-19.9	1.975 (0.117)	0.801 (0.155)	0 (0%)	3 (100%)

Table 6.16: Naïve “Before”-“After” Study Results

Site Type by Condition before conversion	Sites	Accidents recorded in after period		EB estimate of accidents expected after without roundabouts		Point estimate of the % change in crashes		Estimated CMF (and standard error)	
		All	Injury	All	Injury	All	Injury	All	Injury
All sites	39	962	80	802.50	166.20	+34.6	-52.1	1.198 (0.054)	0.47.9 (0.063)
Stop-controlled	19	294	33	314.17	68.43	-6.9	-52.7	0.931 (0.082)	0.473 (0.104)
Signalized (minus 3-lane)	11	613	42	428.17	86.94	+48.7	-51.9	1.487 (0.076)	0.481 (0.081)

6.4 Development of Safety Performance Functions

An additional objective was to develop a Safety Performance Function (SPF) for roundabouts. An SPF is a mathematical model that predicts the mean crash frequency for similar locations with the same traffic volume and other characteristics that define the model. Such an SPF may be used when evaluating the safety performance of an existing roundabout by comparing the frequency of observed to predicted crashes or in estimating the likely safety effects of a contemplated roundabout conversion. How to estimate the likely safety effects of conversions is documented within this report.

Roundabout SPFs were calibrated for total and injury crashes separately for non-interchange and interchange roundabouts. In developing the SPFs several variables were considered, including:

- total entering AADT
- number of circulating lanes
- number of approaches
- environment (urban or rural)
- interchange versus non-interchange location

These were the only variables available for modeling. Note that triple lane roundabouts were not included in these data due to their limited number and the concerns raised with respect to their operation.

Generalized linear regression modeling was used to estimate the model coefficients assuming a negative binomial error distribution, all consistent with the state of the art research in developing these models. In selecting the recommended SPFs for total and injury crashes, low values of the dispersion parameter and statistical significance of the estimated variable coefficients was considered. All estimated coefficients were estimated to be significant at the 95% confidence limit with the exception of interchange presence which was included in the model of injury crashes because the results were consistent with the model for total crashes.

The SPFs developed are provided in Table 6.17.

The model form for all models is: $Crashes/year = exp^{\alpha}(AADT)^{\beta_1} exp^{(\beta_2 * Type + IC * \beta_3)}$

where,

AADT = total entering AADT

Type = 1 if 1 circulating lane; 0 otherwise

IC = 1 if located at an interchange; 0 otherwise

Table 6.17: Models for Roundabouts

Model	α (s.e.)	β_1 (s.e.)	β_2 (s.e.)	β_3 (s.e.)	k (s.e.)
Total	1 lane -4.5958 (1.2851) 2 lane -3.8074 (1.2621)	0.5253 (0.1274)	-0.7884 (0.2423)	0.6988 (0.3710)	0.4839 (0.1266)
Injury	1 lane -6.4109 (1.8322) 2 lane -5.7287 (1.8066)	0.4788 (0.1795)	-0.6822 (0.3051)	0.7850 (0.5733)	0.2460 (0.1933)

6.4.1 Estimating Roundabout Conversion Benefits

To estimate the expected impacts on crashes of a roundabout compared to other designs (existing or planned) crash prediction models for the alternate intersection types are required. Models for an existing intersection, such as those presented in Table 6.12 would be used, along with the intersection's crash history, in the empirical Bayes procedure to estimate *the expected collision frequency with the status quo in place (the EB estimate)*, which would then be compared to *the expected frequency should a roundabout be constructed* to estimate the benefit of converting the existing intersection to a roundabout.

The expected frequency should a roundabout be constructed is estimated from an intersection-level roundabout model such as those presented in Table 6.17. If it is believed that there is no applicable roundabout-level model for the jurisdiction, an *alternate* approach can be used. In this Collision Modification Factors (CMFs) can be applied to *the expected collision frequency with the status quo in place* to estimate the expected benefit.

The first approach is preferred to the alternate and is most convenient because a comprehensive set of collision modification factors (which would be required for a large number of conditions, including AADT levels) is unlikely to be available.

Overview of the Recommended Approach

For presentation purposes it is assumed that a stop-controlled intersection is being considered for conversion to a roundabout and that crash models for fatal+injury and total crashes are available.

Step 1

Assemble data and crash prediction models for stop-controlled intersections and roundabouts. For the past, say, five years,

- Obtain the count of fatal+injury and PDO crashes.
- For the same period obtain or estimate the average total entering AADTs.
- Estimate the average annual entering AADTs that would prevail for the period immediately after the roundabout is installed.

- Assemble required collision prediction models for stop-controlled intersections and roundabouts for fatal+injury and total crashes. If the models cannot be assumed to be representative of the jurisdiction, a calibration multiplier must first be estimated using data (similar to data acquired in Step 1) from a sample of roundabouts representative of that jurisdiction. At a minimum, a dataset for at least 10 roundabouts with a minimum of 50 crashes total is needed for each model. The recalibration multiplier is the sum of crashes recorded in this dataset divided by the sum of the crashes predicted by the model for this dataset. The multiplier is applied to the equation selected for predicting crashes.

Step 2

Use the EB procedure with the data from Step 1 and the *stop-controlled intersection model* to estimate the expected annual number of fatal+injury and total crashes that would occur without conversion, i.e., had the intersection remained stop-controlled.

The EB estimate of expected crash frequency, m , is calculated as:

$$m = wP + (1 - w)x$$

Where:

$$w = \frac{1}{1 + knP}$$

Where:

P = the yearly crash frequency expected as predicted by a crash prediction model

x = the observed crash frequency

n = the number of years of observed crashes per year

k = the overdispersion parameter for a given model

Separate estimates for fatal+injury and total crashes are produced.

Step 3

Use the appropriate roundabout model and the AADTs from Step 1 to estimate the expected number of fatal+injury and total crashes that would occur if the intersection were converted to a roundabout.

Step 4

Obtain the difference between the stop-controlled EB estimates from Step 2 and the roundabout model estimates from Step 3 for fatal+injury and total crashes. The estimated change for PDO crashes is the difference between the change in total and fatal+injury crashes.

Step 5

Applying suitable dollar values for fatal+injury and PDO crashes to the estimates from Step 4, obtain the estimated net safety benefit of converting the intersection to a roundabout.

Step 6

Compare the estimated net safety benefit from Step 5 against the annualized roundabout conversion costs, considering other impacts if desired, and using conventional economic analysis tools. How this is done, and in fact whether it is done, is very jurisdiction-specific, and conventional methods of economic analysis can be applied after obtaining estimates of the economic values of changes in delay, fuel consumption, and other impacts. The results of the analysis above may indicate that roundabout conversion is justified based on a consideration of safety benefits. This result may be considered in context with other factors, such as:

- Other improvement measures at the existing intersection may be more cost effective.
- Other impacts (delay, fuel consumption, etc.) may need to be assessed.

Example Calculation

A four-leg, stop-controlled intersection in a non-interchange area is being considered for conversion to a single lane roundabout. This example provides some calculations that could have been used to inform that decision. It is assumed that the models in Tables 4 and 9 apply.

Step 1

The assembled data and models are as follows:

- Number of approaches = 4
- Number of circulating lanes for proposed roundabout = 1
- Years of observed data = $n = 3$
- Fatal+Injury collisions observed = 8
- PDO crashes observed = 15
- Major AADT before conversion = 10,000
- Minor AADT before conversion = 6,000
- Major AADT after conversion = 11,000
- Minor AADT after conversion = 6,500

Applying the models from Table 4 for an urban 4-leg stop-controlled intersection:

$$\text{Total Crashes/year} = \exp(-3.12)(10,000)^{0.27}(6,000)^{0.16} = 2.14$$

The overdispersion parameter is 0.60

$$\text{Fatal+Injury Crashes/year} = \exp(-4.35)(10,000)^{0.29}(6,000)^{0.19} = 0.97$$

The dispersion parameter is 0.34

Step 2

Estimate the empirical Bayes estimate of the expected crash frequency without conversion.

Next, the weights and EB estimates are calculated per the above equations. Note that the number of observed crashes is divided by the number of years since the EB estimate is per year.

$$w_{Total} = \frac{1}{1 + k_{Total}nP_{Total}} = \frac{1}{1 + 0.60(3)(2.14)} = 0.21$$

$$m_{Total} = w_{Total}P_{Total} + (1 - w_{Total})x_{Total} = 0.21(2.14) + (1 - 0.21) * (23/3) = 6.51$$

$$w_{F+I} = \frac{1}{1 + k_{F+I}nP_{F+I}} = \frac{1}{1 + 0.34(3)(0.97)} = 0.50$$

$$m_{F+I} = w_{F+I}P_{F+I} + (1 - w_{F+I})x_{F+I} = 0.34(0.97) + (1 - 0.34) * (8/3) = 2.09$$

Because volumes are expected to increase in the “after” period, albeit only slightly, an adjustment is made to the EB estimates to account for this change. This adjustment factor is calculated by dividing the existing condition model predictions using the “after” period volumes by the prediction with the present volumes:

For total crashes:

$$(11,000)^{0.27}(6,500)^{0.16} / (10,000)^{0.27}(6,000)^{0.16} = 1.04$$

For fatal+injury crashes:

$$(11,000)^{0.29}(6,500)^{0.19} / (10,000)^{0.29}(6,000)^{0.19} = 1.04$$

The adjusted EB estimates, using these factors are now equal to:

$$6.51(1.04) = 6.77 \text{ for total crashes per year}$$

$$2.09(1.04) = 2.17 \text{ for fatal+injury crashes per year}$$

The estimate for PDO crashes is $6.77 - 2.17 = 4.60$ crashes per year

Step 3

The roundabout model is used to predict the annual number of fatal+injury and total crashes should the intersection be converted to a roundabout.

$$\text{Total crashes/year} = \exp^{(-4.5958)}(11,000+6,500)^{0.5253} \exp^{(-0.7884(1)+0.6988(0))} = 0.78$$

$$\text{Fatal+Injury Crashes/year} = \exp^{(-6.4109)}(11,000+6,500)^{0.4788} \exp^{(-0.6822(1)+0.7850(0))} = 0.09$$

The expected number of PDO crashes at the site if a conversion were to take place is $0.78 - 0.09 = 0.69$ per year.

Step 4

The expected change in PDO is equal to $4.60 - 0.69 = 3.91$ per year

The expected change in fatal+injury crashes is equal to $2.17 - 0.09 = 2.08$ per year

This benefit can be considered in economic terms, along with other benefits and with construction costs to assess the economic feasibility of constructing the roundabout.

6.5 Operational Impacts of Roundabouts

As part of this study, a comparison of the operations of the different roundabout types was conducted for before construction of the roundabout and after the roundabout was opened for traffic. A list of the roundabouts that operations analysis was conducted for is provided below:

- EB M-14 Ramps at Maple Road (Interchange Roundabout)
- WB M-14 Ramps at Maple Road (Interchange Roundabout)
- Huron Parkway at Nixon Road (Single lane Roundabout)
- Maple Road at Drake Road (Multi-lane Roundabout)
- Maple Road at Farmington Road (Multi-lane Roundabout)

For the “before” conditions, previous traffic operations were obtained from studies conducted prior to each intersection improvement project. The operational analysis for the “before” period was conducted using the Synchro software and Highway Capacity Software (HCS) packages. Detailed reports of the “before” operational analysis can be found in the Appendix of this report.

In order to conduct an “after” or current (2011) operational analysis, “after” turning movement volumes were established by applying growth factors to the before turning movement counts. The growth factors were established by comparing the average daily traffic (ADT) for the before year against the most recent ADT volumes available. No traffic counts were taken as part of this study.

Once the 2011 peak hour turning movement volumes were developed, a RODEL analysis was conducted to determine the predicted operations for the “after” scenarios. The operational analysis included both LOS and average delay, in seconds per vehicle. The predicted delay for both the “before” and “after” scenarios was compared to determine a percent change. Table 6.18 and Table 6.19 summarize the results of the operational analysis. The delay for the Maple Road at Drake Road and Maple Road at Farmington Road were assumed because values were not determined at the time of the roundabout construction, only LOS was determined.

Table 6.18: AM Peak Period Delay and Level of Service

Intersection	“Before”		“After”		Percent Change
	LOS	Delay (sec/veh)	LOS	Delay (sec/veh)	
EB M-14 Ramps at Maple Road	F	105.5	A	6.5	93.8%
WB M-14 Ramps at Maple Road	D	34.2	A	5.1	85.1%
Huron Parkway at Nixon Road	B	22.3	A	5.7	74.4%
Maple Road at Drake Road	D	35.0**	A	5.7	83.7%
Maple Road at Farmington Road	F	80.0**	A	7.7	90.4%

** denotes an assumed value

Table 6.19: PM Peak Period Delay and Level of Service

Intersection	"Before"		"After"		Percent Change
	LOS	Delay (sec/veh)	LOS	Delay (sec/veh)	
EB M-14 Ramps at Maple Road	E	37.1	A	6.5	82.5%
WB M-14 Ramps at Maple Road	C	16.0	A	3.7	76.9%
Huron Parkway at Nixon Road	B	19.5	A	6.8	65.1%
Maple Road at Drake Road	E	55.0**	A	6.4	88.4%
Maple Road at Farmington Road	E	55.0**	A	9.5	82.7%

** denotes an assumed value

6.6 Economic Analysis

Point estimates of the crash benefit for each roundabout, expressed in terms of crash costs per year, are provided in the last column of the attached spread sheet.

These are based on unit crash costs and the estimated change in crashes per year for injury and PDO crashes. The change in PDO crashes was calculated as the change in all crashes minus the change in injury crashes. 95% confidence intervals are provided for the change in crashes; as expected these are quite wide for individual roundabouts and must be considered in interpreting the results based on point estimates.

The unit crash costs are derived from the National Safety Council (NSC) 2009 Average Economic Cost per Death, Injury, or Crash suggested by MDOT for use on Road Safety Audit (RSA) projects. These are available at the following link.

http://www.nsc.org/news_resources/injury_and_death_statistics/Pages/EstimatingtheCostsofUnintentionalInjuries.aspx

The basic numbers are as follows:

Death	\$1,290,000
Nonfatal Disabling Injury	\$68,100
Property Damage Crash (including non-disabling injuries)	\$8,200

Since the death and injury costs are per victim, they needed to be first converted to cost per crash using the average number of victims per crash for Michigan in 2009. Then it was necessary to derive an aggregate cost for fatal plus non-fatal injury crashes since our analysis defined injury crashes as such. To do so, the relative numbers of fatal and non-fatal crashes for intersections in 2007 (the average of the conversion years) were used as weights applied to the fatal and non-fatal injury costs estimated in the first step. The unit crash cost calculations are shown at the bottom of the spreadsheet.

Table 6.20: Calculation of Cost per Fatal/Injury Crash

Crashes at Intersections (Michigan 2007)	Fatal	A-Level	B-Level	C-Level	All Injury
	265	1,873	5,095	15,174	22,142
NSC Cost per victim	Fatal	Injury			
	\$ 1,290,000	\$ 68,100			
Victims per crash (Michigan 2009)	Fatal/crash	Injury/crash			
	1.081	1.357			
Cost/crash	Fatal	Injury	Fatal & Injury		
	\$ 1,394,032	\$ 92,390	\$ 107,784		

Once the cost per crash was determined, these values were applied to the change in crashes per year for both PDO and injury related crashes. Table 6.21 contains the benefits resulting from the reduction in crashes. Positive values denote a reduction in crashes.

Table 6.21: Benefit Analysis Resulted from Crash Reduction

Intersection	Change in PDO/year	Change in injury/year	PDO/year Savings	Injury/year Savings	ALL/year Savings
SINGLE LANE ROUNDABOUTS					
I-94 Business (Main St) & Riverview Dr	3.013	1.186	\$24,704	\$127,785	\$152,488
I-94 Business (Main St) & 5th St	1.451	0.536	\$11,897	\$57,752	\$69,649
US-127 BR & Mission St	0.239	0.382	\$1,959	\$41,202	\$43,162
Willow Hwy & Canal Rd	-0.885	-0.118	-\$7,259	-\$12,770	-\$20,029
Bennett Rd & Hulett Rd	0.080	1.822	\$659	\$196,429	\$197,088
Michigan Ave & Washington Square	1.231	0.026	\$10,092	\$2,794	\$12,886
Mosher St & Main St	0.092	0.344	\$753	\$37,128	\$37,881
Cherry St & Jefferson Ave	0.930	0.969	\$7,627	\$104,432	\$112,059
Wealthy St & Lafayette Ave	3.038	0.162	\$24,914	\$17,454	\$42,368
Wealthy St & Jefferson Ave	3.651	2.596	\$29,939	\$279,836	\$309,776
7 Mile Rd & Brewer Ave	0.230	0.534	\$1,889	\$57,581	\$59,469
Hamburg Rd & Winans Lake Rd	1.464	0.695	\$12,006	\$74,954	\$86,959
Main St & 3rd St	-0.597	0.624	-\$4,896	\$67,299	\$62,403
Hayes Rd & 25 Mile Rd	-2.992	0.939	-\$24,532	\$101,160	\$76,629
M-46/Apple Ave & M-37/Newaygo Rd	1.657	1.228	\$13,588	\$132,371	\$145,960
3rd St & Western Ave	-0.723	0.016	-\$5,929	\$1,763	-\$4,166
Cooley Lake Rd & Bogie Lake Rd	-1.505	1.880	-\$12,344	\$202,651	\$190,306
Cooley Lake Rd & Oxbow Lake Rd	-1.801	-0.035	-\$14,770	-\$3,764	-\$18,534
Old US-27/North Hwy & Livingston Blvd	-0.237	-0.069	-\$1,945	-\$7,451	-\$9,397
Nixon Rd & Huron Pkwy	1.061	0.582	\$8,698	\$62,716	\$71,414
AVERAGE	0.470	0.715	\$3,852	\$77,066	\$80,919
TOTAL	9.396	14.300	\$77,049	\$1,541,322	\$1,618,372

Intersection	Change in PDO/year	Change in injury/year	PDO/year Savings	Injury/year Savings	ALL/year Savings
DOUBLE LANE ROUNDABOUTS					
Lake Lansing Rd & Chamberlain Dr	-2.689	-0.615	-\$22,047	-\$66,322	-\$88,369
Wood St & Sam's Way	-2.455	-0.658	-\$20,134	-\$70,910	-\$91,044
Cedar St & Holbrook Dr	-1.162	-0.719	-\$9,532	-\$77,503	-\$87,035
Michigan Ave & Rankin St	2.767	0.045	\$22,691	\$4,809	\$27,500
Romeo Plank Rd & 19 Mile Rd	-4.343	0.268	-\$35,609	\$28,882	-\$6,727
Romeo Plank Rd & Cass Ave	-9.082	0.252	-\$74,473	\$27,141	-\$47,332
Utica Rd & Dodge Park Rd	6.937	1.156	\$56,880	\$124,618	\$181,498
M-53 ramp & 26-Mile	4.188	1.977	\$34,345	\$213,074	\$247,419
M-53 ramp & 26-Mile	-1.646	0.466	-\$13,499	\$50,242	\$36,743
Baldwin Rd/Indianwood Rd & S. Coats Rd	-3.180	0.246	-\$26,080	\$26,503	\$423
68th Ave & Randall St/ State	-2.746	0.199	-\$22,521	\$21,416	-\$1,105
I-75 & M-81/Washington Road	0.890	0.156	\$7,299	\$16,763	\$24,061
I-75 & M-81/Washington Road	3.206	0.591	\$26,293	\$63,672	\$89,965
Geddes Rd & Superior Rd	-0.355	0.177	-\$2,911	\$19,118	\$16,207
Maple Rd & M-14	-4.858	0.441	-\$39,838	\$47,560	\$7,721
Maple Rd & M-14	-0.688	0.517	-\$5,641	\$55,696	\$50,055
AVERAGE	-0.951	0.281	-\$7,799	\$30,297	\$22,499
TOTAL	-15.217	4.497	-\$124,777	\$484,757	\$359,980
TRIPLE LANE ROUNDABOUTS					
Maple Rd & Drake Rd	-39.692	-0.080	-\$325,474	-\$8,612	-\$334,086
Maple Rd & Farmington Rd	-26.219	0.485	-\$214,998	\$52,274	-\$162,724
14 Mile Rd & Farmington Rd	-28.162	3.335	-\$230,931	\$359,406	\$128,475
AVERAGE	-31.358	1.247	-\$257,134	\$134,356	-\$122,778
TOTAL	-94.074	3.740	-\$771,403	\$403,069	-\$368,335
TOTAL AVERAGE			-\$21,003	\$62,286	\$41,282
GRAND TOTAL			-\$819,130	\$2,429,148	\$1,610,017

As shown in Table 6.21 on average a roundabout in Michigan will produce a benefit of \$41,282 per year. When analyzed by number of circulating lanes it was determined that single lane roundabouts offer the greatest annual benefit (\$80,919 annually), double lane roundabouts also provided a positive average benefit (\$22,499 annually) and triple lane roundabouts were estimated to provide a negative average benefit (-\$122,778 annually).

Additional benefits of roundabout installation may be realized from the reduction in delay that can be the result of the new intersection type. Operational data was collected for several of the roundabouts in order to determine the delay during the "before" and "after" periods. This data was collect-

ed from various road agencies in an effort to determine the benefits that the various types of roundabouts provide in terms of delay reduction savings. Again, the delay savings for the Maple Road at Drake Road and Maple Road at Farmington Road were assumed because values were not determined at the time of the roundabout construction, only LOS was determined.

Table 6.22: Estimated Benefit From Stop Delay Savings

Intersection	Estimated Stop Delay Savings
SINGLE LANE ROUNDABOUT	
Huron Parkway at Nixon Road	\$510,318
DOUBLE LANE ROUNDABOUT	
EB M-14 Ramps at Maple Road	\$2,575,331
WB M-14 Ramps at Maple Road	\$762,460
Average	\$1,668,896
TRIPLE LANE ROUNDABOUTS	
Maple Road at Drake Road	\$1,876,588**
Maple Road at Farmington Road	\$2,786,297**
Average	\$2,331,443**

** denotes an assumed value

When these average values for the various roundabout types are applied to the cost of the roundabout construction a time of return on investment can be determined. Construction costs for many roundabouts were obtained from various sources, including MDOT Regions, TSCs, individual cities, prior conducted studies, and county road commissions. Construction costs for roundabouts can vary greatly depending on many factors, including geometric design, required right-of-way acquisition, and pavement type. Table 6.23 contains the construction costs that were obtained.

Table 6.23: Roundabouts Construction Cost

Intersection	Roundabout Type	Construction Cost
Bennett Rd & Hulett Rd	single lane	\$339,844
Lake Lansing Rd & Chamberlain Dr	double lane	\$750,000
Wood St & Sam's Way	double lane	\$750,000
Cedar St & Holbrook Dr	double lane	\$750,000
Hamburg Rd & Winans Lake Rd	single lane	\$524,136
Hayes Rd & 25 Mile Rd	single lane	\$528,430
Romeo Plank Rd & 19 Mile Rd	double lane	\$3,110,094
Romeo Plank Rd & Cass Ave	double lane	\$3,110,094
Utica Rd & Dodge Park Rd	double lane	\$3,393,431
Maple Rd & Drake Rd	triple lane	\$1,777,546
Maple Rd & Farmington Rd	triple lane	\$2,138,162

In order to calculate a time of return on investment, an average construction cost for the different types of roundabouts (single lane, double lane, and triple lane) was assigned. The average construction cost for the different types of roundabouts are:

- Single lane: \$464,137
- Double lane: \$1,977,270
- Triple lane: \$1,957,854

With a construction cost, benefit from crash reduction, and a benefit from delay reduction, a time of return on investment can be calculated. Table 6.24 contains the return on investment, in years, for the study roundabouts. Table 6.24 is broken down by type of roundabout and further analysis of the time of return can be found in the Appendix of this report.

Table 6.24: Roundabout Time of Return by Roundabout Type

Intersection	Crash Reduction Benefit	Delay Reduction Benefit	Construction Cost	Time of Return (years)
SINGLE LANE ROUNDABOUT				
I-94 Business (Main St) & Riverview Dr	\$152,488	\$510,318	\$464,137	0.70
I-94 Business (Main St) & 5 th St	\$69,649	\$510,318	\$464,137	0.80
US-127 BR & Mission St	\$43,162	\$510,318	\$464,137	0.84
Willow Hwy & Canal Rd	-\$20,029	\$510,318	\$464,137	0.95
Bennett Rd & Hulett Rd	\$197,088	\$510,318	\$339,844	0.48
Michigan Ave & Washington Square	\$12,886	\$510,318	\$464,137	0.89
Mosher St & Main St	\$37,881	\$510,318	\$464,137	0.85
Cherry St & Jefferson Ave	\$112,059	\$510,318	\$464,137	0.75
Wealthy St & Lafayette Ave	\$42,368	\$510,318	\$464,137	0.84
Wealthy St & Jefferson Ave	\$309,776	\$510,318	\$464,137	0.57
7 Mile Rd & Brewer Ave	\$59,469	\$510,318	\$464,137	0.81
Hamburg Rd & Winans Lake Rd	\$86,959	\$510,318	\$524,136	0.88
Main St & 3 rd St	\$62,403	\$510,318	\$464,137	0.81
Hayes Rd & 25 Mile Rd	\$76,629	\$510,318	\$528,430	0.90
M-46/Apple Ave & M-37/Newaygo Rd	\$145,960	\$510,318	\$464,137	0.71
3 rd St & Western Ave	-\$4,166	\$510,318	\$464,137	0.92
Cooley Lake Rd & Bogie Lake Rd	\$190,306	\$510,318	\$464,137	0.66
Cooley Lake Rd & Oxbow Lake Rd	-\$18,534	\$510,318	\$464,137	0.94
Old US-27/North Hwy & Livingston Blvd	-\$9,397	\$510,318	\$464,137	0.93
Nixon Rd & Huron Pkwy	\$71,414	\$510,318	\$464,137	0.80
AVERAGE	\$80,919	\$510,318	\$464,137	0.80
DOUBLE LANE ROUNDABOUT				
Lake Lansing Rd & Chamberlain Dr	-\$88,369	\$1,668,896	\$750,000	0.47
Wood St & Sam's Way	-\$91,044	\$1,668,896	\$750,000	0.48
Cedar St & Holbrook Dr	-\$87,035	\$1,668,896	\$750,000	0.47
Michigan Ave & Rankin St	\$27,500	\$1,668,896	\$1,977,270	1.17
Romeo Plank Rd & 19 Mile Rd	-\$6,727	\$1,668,896	\$3,110,094	1.87
Romeo Plank Rd & Cass Ave	-\$47,332	\$1,668,896	\$3,110,094	1.92

Utica Rd & Dodge Park Rd	\$181,498	\$1,668,896	\$3,393,431	1.83
M-53 ramp & 26-Mile	\$247,419	\$1,668,896	\$1,977,270	1.03
M-53 ramp & 26-Mile	\$36,743	\$1,668,896	\$1,977,270	1.16
Baldwin Rd/Indianwood Rd & S. Coats Rd	\$423	\$1,668,896	\$1,977,270	1.18
68 th Ave & Randall St/ State	-\$1,105	\$1,668,896	\$1,977,270	1.19
I-75 & M-81/Washington Road	\$24,061	\$1,668,896	\$1,977,270	1.17
I-75 & M-81/Washington Road	\$89,965	\$1,668,896	\$1,977,270	1.12
Geddes Rd & Superior Rd	\$16,207	\$1,668,896	\$1,977,270	1.17
Maple Rd & M-14	\$7,721	\$1,668,896	\$1,977,270	1.18
Maple Rd & M-14	\$50,055	\$1,668,896	\$1,977,270	1.15
AVERAGE	\$22,499	\$1,668,896	\$1,977,270	1.16
TRIPLE LANE ROUNDABOUT				
Maple Rd & Drake Rd	-\$334,086	\$2,331,446	\$1,777,546	0.89
Maple Rd & Farmington Rd	-\$162,724	\$2,331,446	\$2,138,162	0.99
14 Mile Rd & Farmington Rd	\$128,474	\$2,331,446	\$1,957,854	0.80
AVERAGE	-\$122,778	\$2,331,446	\$1,957,854	0.89

As shown in the table above, each type of roundabout is expected to have a time of return of less than two (2) years. This is a result of the large reduction in crashes at many of the intersections, coupled with a significant benefit that results from the increased operations.

7.0 Conclusion

The objective of this report was to determine the impact on crashes at locations where roundabouts have been installed in Michigan, to observe roundabout operations, and to identify the key geometric configurations and site characteristics that influence safety, performance and return on investment. The simple “before” and “after” analysis in this report has shown that roundabouts have reduced the total average annual crashes at single lane and double lane roundabouts, while increasing the total average annual crashes at triple lane roundabouts. The roundabouts were also analyzed for the effect that roundabout installation had on fatal and A-Level crashes. These results are summarized below:

- Single lane; 60.55 crashes per year reduction
- Double lane; 18.56 crashes per year reduction
- Triple lane; 94.76 crashes per year increase
- Fatal & A-Level; 5.39 crashes per year reduction

The EB analysis is a more robust analysis that accounts for the regression to mean, volume trends, and other factors that a simple “before” analysis does not take into consideration. The EB analysis was utilized to more accurately determine the change in crashes at the roundabout intersections. With the reduction in crashes more accurately determined by the EB analysis, CMFs were determined for various roundabout conversions. The results showed increases in total crashes for all group, except for conversions from signalized to one or two lane roundabouts. The largest increases in crashes were at conversions from signalized to three lane roundabouts (three sites). By contrast, there are reductions in injury crashes for all groups. Considering the cost of crashes by severity type there was a net crash cost benefit for most groups. The CMFs are located in Table 6.15 and are summarized below:

- All sites (minus triple lane roundabouts) stop controlled or signalized before
 - $CMF_{total} = 1.002$
 - $CMF_{injury} = 0.488$
- Triple lane roundabouts signalized before
 - $CMF_{total} = 1.875$
 - $CMF_{injury} = 0.801$
- Signalized intersections
 - $CMF_{total} = 0.783$
 - $CMF_{injury} = 0.300$

The data were also used to develop SPFs that can be used to estimate the expected number of crashes an intersection would experience if it was converted to a roundabout. These SPFs vary depending on the type of roundabouts being constructed. Below is a list of the roundabout SPFs developed:

$$Crashes/year = exp^{\alpha}(AADT)^{\beta_1} exp^{(\beta_2 * Type + IC * \beta_3)}$$

where,

AADT = total entering AADT

Type = 1 if 1 circulating lane; 0 otherwise

IC = 1 if located at an interchange; 0 otherwise

Model	α (s.e.)	β_1 (s.e.)	β_2 (s.e.)	β_3 (s.e.)	k (s.e.)
Total	1 lane -4.5958 (1.2851)	0.5253 (0.1274)	-0.7884 (0.2423)	0.6988 (0.3710)	0.4839 (0.1266)
	2 lane -3.8074 (1.2621)				
Injury	1 lane -6.4109 (1.8322)	0.4788 (0.1795)	-0.6822 (0.3051)	0.7850 (0.5733)	0.2460 (0.1933)
	2 lane -5.7287 (1.8066)				

Roundabouts also have an effect on the operations of an intersection. In many cases roundabout are built as an operational countermeasure to congestion as well as providing a safety benefit to the intersection. Reducing delay allows for the road users to reach their destination quicker and reduce wasted time spent in their vehicles, proving a benefit to the road user. It is estimated that the following user savings can be realized from the various roundabout types:

- Single lane; \$510,318 per year
- Double lane; \$1,668,896 per year
- Triple lane; \$2,331,446 per year

These results may vary, depending on the “before” conditions of the intersection as well as the roundabout features.

Overall, roundabouts have shown to reduce the number and severity of crashes, as well as positively affecting the operations of intersections. However, there are still some concerns with roundabouts and how they are constructed and utilized by the road users.

7.1 Identifying and Rating the Issues

As previously discussed, the ranking of the issues observed during the site visits was conducted using the *Collision Risk Assessment Method* as seen in Table 1.1, Table 1.2, and Table 1.3. The following is a list of issues that were observed during the site visits:

- Lane discipline within multi-lane roundabouts
- Approach vehicles failure to yield
- Speeding within the circulating roadway of a roundabout
- Vehicles yielding within the circulatory roadway
- “Tear Drop” approaches ignoring yield signs
- Pedestrians crossing mid-block
- Merging upon leaving circulatory roadway of multi-lane roundabouts
- Left turns out of businesses at roundabouts

Table 7.1 is an overview of the safety issue along with the expected crash type, frequency, and severity and the associated risk rating.

Table 7.1 Identification and Rating of Issues

Safety Issue	Expected Crash Type	Expected Frequency	Expected Severity	Risk Rating
Lane discipline within multi-lane roundabouts	Sideswipe	Occasional	Low	B
Approach vehicles failure to yield	Sideswipe	Occasional	Low	B
Speeding within the circulatory roadway of a roundabout	Sideswipe	Occasional	Moderate	C
Vehicles yielding within the circulatory roadway	Rear-end	Rare	Low	A
“Tear Drop” approaches ignoring yield signs	Sideswipe	Rare	Moderate	B
Pedestrians crossing mid-block	Pedestrian	Rare	Extreme	C
Merging upon leaving circulatory roadway of multi-lane roundabouts	Sideswipe	Occasional	Low	B
Left turns out of businesses at roundabouts	Angle and Rear-end	Infrequent	Moderate	B

Safety Issue 1: Lane discipline within multi-lane roundabouts

This issue was observed at each of the multi-lane roundabouts that the project team visited during the site review process. It was common to witness vehicles changing lanes within the circulating roadway or exiting the circulating roadway from the incorrect lane. The risk of crashes is increased due to the weaving movements of some vehicles.

Expected Crash Types: Sideswipe
Expected Frequency: Occasional
Expected Severity: Low
Risk Rating: B

Safety Issue 2: Approach vehicles failure to yield to circulating traffic

It was observed during the site visits that occasionally the approach vehicles failed to yield to the circulating traffic. This could have been a result of unfamiliarity of the roadway or underestimating the gap. However, due to the slow speeds of the circulating traffic within the roundabout, few conflicts were observed.

Expected Crash Types: Sideswipe
Expected Frequency: Occasional
Expected Severity: Low
Risk Rating: B

Safety Issue 3: Speeding at roundabouts

During the site visits it appeared that at the multi-lane roundabout vehicles would often take the “fastest path”, weaving between the circulating lanes and traveling faster than the designed speed of the roundabout. Additional concerns with vehicles traveling too fast while entering the roundabout had been voiced by Savolainen et al.¹⁷ in *Improving Driver’s Ability to Safely and Effectively Use Roundabouts: Educating the Public to Negotiate Roundabouts*.

Expected Crash Types:	Sideswipe
Expected Frequency:	Occasional
Expected Severity:	Moderate
Risk Rating:	C

Safety Issue 4: Vehicles yielding within the circulating roadway

One observation from the site visits was vehicles within the circulating roadway yielding to approach vehicles. This is most likely due to driver’s unfamiliarity with roundabouts and may become rarer as drivers become more familiar with roundabout operations. These actions increase the risk of rear-end collisions.

Expected Crash Types:	Rear-end
Expected Frequency:	Rare
Expected Severity:	Low
Risk Rating:	A

¹⁷ Savolainen, P., Gates, T., Datta, T., Kawa, J., Flannery, A., Retting, R., “Improving Driver’s Ability to Safely and Effectively Use Roundabouts: Educating the Public to Negotiate Roundabouts.” 2011

Safety Issue 5: “Tear Drop” approach vehicles ignoring yield signs

Several of the roundabouts that were analyzed as part of the site visits were intersection roundabouts with only three (3) entering approaches. As seen in Figure 7.1 the northbound approach does not have a conflicting “through” movement coming from the west and does not have a “left turn” movement from the north. The only conflicting movement that the northbound approach has is a “U-turn” movement from the north or east. These movements are seldom made and the drivers familiar with the intersection have come to not expect a vehicle approaching within the circulatory roadway. It was observed that the northbound approaching vehicles often ignored the yield sign and also observed often not checking for approaching vehicles in the circulating roadway.

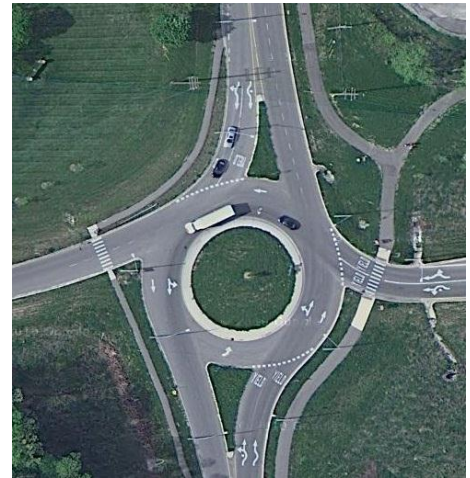


Figure 7.1: WB M-14 at Maple

Expected Crash Types:	Sideswipe
Expected Frequency:	Rare
Expected Severity:	Moderate
Risk Rating:	B

Safety Issue 6: Pedestrians crossing mid-block

It was observed during the site visits of several of the roundabouts, that pedestrians often cross mid-block, avoiding the roundabout. Many of these observations were seen at the Maple Road at Farmington Road and Maple Road at Drake Road intersections. Both of these intersections are triple lane roundabouts causing the pedestrians to cross a total of six (6) lanes of roadway (3 lanes at a time) at the roundabout. Despite the presence of Rapid Rectangular Flashing Beacons (RRFB) located at the Maple Road at Farmington Road intersection and Pedestrian Hybrid Beacons (HAWK Signals) located at Maple Road at Drake Road intersection, pedestrians were often observed to cross mid-block in order to cross only two (2) lanes of traffic along Maple Road.

Expected Crash Types:	Pedestrian
Expected Frequency:	Rare
Expected Severity:	Extreme
Risk Rating:	C

Safety Issue 7: Merging upon leaving circulatory roadway

Figure 7.2 shows the merge distance for the westbound departing movements of the Maple Road at Drake Road roundabout. In approximately 365 feet westbound Maple Road goes from three (3) lanes to one (1) lane. According to the MDOT Maintaining Traffic Typical the merge distance for reducing three (3) lanes to one (1) lane (24 feet reduction) for a roadway with a posted speed limit greater than 40 mile per hour is at least 1080 feet. This area is the site of many of the crashes that were experienced at many of the triple lane roundabouts.

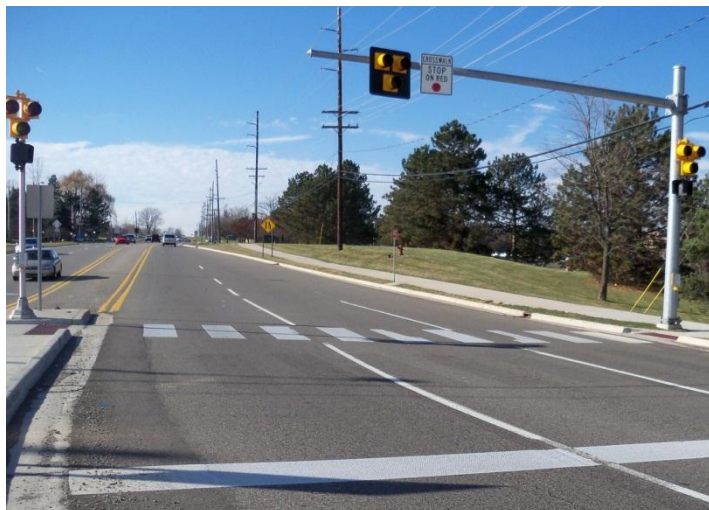


Figure 7.2: WB departing at Maple Rd and Drake Rd

Expected Crash Types:	Sideswipe
Expected Frequency:	Occasional
Expected Severity:	Low
Risk Rating:	B

Safety Issue 8: Left turns into and out of businesses near roundabouts

During site visits it was observed that additional conflicts and conflict points were present at driveways near the roundabout. Several vehicles were observed making left turns into and out of driveways near the roundabouts; in some instances conflicts were observed. It should be considered to restrict left turns into and out of these driveways. As demonstrated in Figure 7.3 the roundabout can be utilized to make an indirect left turn, helping to eliminate conflict points.

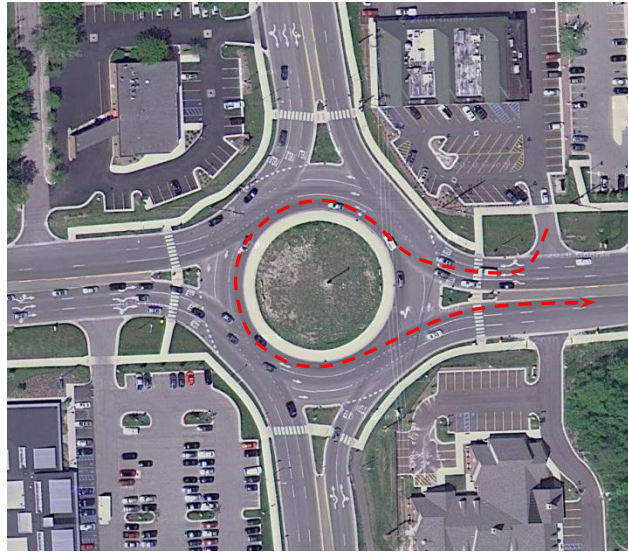


Figure 7.3: Indirect left turn utilizing roundabouts

Expected Crash Types:	Angle and Rear-end
Expected Frequency:	Infrequent
Expected Severity:	Moderate
Risk Rating:	B

7.2 Recommendations for Further Research

Roundabouts are a relatively new intersection type to Michigan and many drivers appear to be somewhat tentative and sometimes confused when traveling within roundabouts. As drivers become more familiar and comfortable with roundabouts, they may become a more viable intersection option. Continued research into the effectiveness of roundabouts is recommended as drivers become more familiar with the design, and as they design and construction of roundabouts becomes more streamlined.

It has been stated by Savolainen et al. that speeding may be a contributing factor to crashes at roundabouts. This study concentrated on crash report analysis and not actual speeds at roundabouts. Research should be considered into analyzing the speeds approaching roundabouts, entering roundabouts, and within roundabouts in order to determine if motorists are travelling too fast at roundabouts and possible mitigation measures that may be helpful for proper speed management.

It was observed in the site visits that non-motorized road users often avoided roundabouts. At several of the roundabouts, non-motorized road users chose to cross the street mid-block rather than cross at the crosswalks provided at the roundabouts. Research should be considered to analyze the non-motorized behaviors at roundabouts and possible mitigation measures that may be required.

7.3 Recommendations for Implementation

As part of the MDOT Roundabout Study, the MDOT Roundabout Guide (November, 2007) was also reviewed to determine potential updates or changes based on best practices. In addition to the best practices mentioned above which should be incorporated, the following revisions should be considered for inclusion in the next version of the MDOT Roundabout Guide:

- Sections 2/3/4: ARCADY software and the Highway Capacity Manual models could also be acceptable.
- Page 32: Eliminate combined lane use/destination signs. Remove language and figures for combined lane use/destination signs. Include coordination with MDOT Signing Unit.
- Section 4: Consider including conduit for future pedestrian signals (PHB) at multi-lane roundabouts, should they be needed in the future.
- Markings/Signing: New MMUTCD by January 2012 – once approved, should be referenced
- Appendix B: Update various costs for B/C calculations
- P. 6: Per additional research regarding HCM and RODEL delay methodology, eliminate table 1 and all text references to adjustment factors for geometric delay. Carry through other parts of the guide as applicable. Replace with text requiring direct comparison of RODEL delay with other software results for stop control/signal.
- Crash prediction: Add the new Michigan-specific safety performance functions from the MDOT Roundabout Study.
- Consider restricting left turns into and out of driveways near roundabouts. This would reduce the number of conflict points and allow vehicles to utilize the roundabout to make an indirect left turn.

Table 7.2 presents a summary of recommended revisions to the MDOT Roundabout Guide.

THIS PAGE WAS INTENTIONALLY LEFT BLANK

Table 7.2: Summary for Recommended Revisions to the MDOT Roundabout Guide

Topic	Source(s)	Comments
Mini-Roundabouts	FHWA Roundabout Guide – Section 6.6 FHWA Mini-roundabout Study (currently underway) Mini-Roundabouts, A Definitive Guide for the installation of small and mini-roundabouts FHWA Mini-Roundabouts Technical Summary	Add guidance for mini-roundabouts
Exiting and Circulating Conflicts	FHWA Roundabout Guide - Section 6.5.6	Incorporate language/design methods from the FHWA Roundabout Guide for preventing exiting and circulating conflicts at multi-lane roundabouts
HCM 2010	HCM 2010	Add language identifying potential issues/concerns with HCM 2010
Roundabout Simulations		Add language noting situations where simulations can be useful and indicate simulation software should be calibrated to match RODEL, ARCADY, or Synchro 8.0
HSM Crash Analyses	Highway Safety Manual (AASHTO 2010)	The HSM crash procedures can be used for crash analysis
Truck Accommodation	FHWA Roundabout Guide WisDOT FDM – Section 30.5 WisDOT/Mn/DOT Joint Truck Study	Incorporate guidance from the FHWA Roundabout Guide, WisDOT FDM, and WisDOT/Minnesota Department of Transportation (Mn/DOT) Joint Truck Study
Lighting	FHWA Roundabout Guide – Chapter 8	The FHWA Roundabout Guide provides a detailed summary of recommended lighting considerations
Landscaping	FHWA Roundabout Guide – Chapter 9	The FHWA Roundabout Guide provides general landscaping principles and guidance for landscaping the central island, splitter islands, and approaches
Bypass Lanes	FHWA Roundabout Guide – Section 6.8.6	The FHWA Roundabout Guide illustrates options and considerations for designing right-turn bypass lanes

Topic	Source(s)	Comments
Pedestrian / Bicycle Accommodation	FHWA Roundabout Guide – Section 6.8	The FHWA Roundabout Guide provides general guidance for pedestrian and bicycle facilities at roundabouts
Concrete Jointing	FHWA Roundabout Guide – Section 6.8.8.2	The FHWA Roundabout Guide provides information for designing joint patterns when using concrete at roundabouts
Signing and Pavement Marking		Update per new MUTCD
Path Overlap	WisDOT FDM – Section 30.5.16	Incorporate information from the WisDOT Roundabout Guide – (FDM)
Splitter Island Design	WisDOT FDM – Section 30.5.18	Incorporate information from the WisDOT Roundabout Guide – (FDM)
High Speed Approaches	WisDOT FDM – Section 30.5.18	Incorporate information from the WisDOT Roundabout Guide – (FDM)
Measuring Phi	WisDOT FDM – Section 30.5.20	Incorporate information from the WisDOT Roundabout Guide – (FDM)
Fast Paths	WisDOT FDM 11-26-50, Attachment 50.1	Incorporate information from the WisDOT Roundabout Guide – (FDM)
Overhead Lane Guide Signs	WisDOT Roundabout Guide– FDM (Section 35.1.3.2)	Incorporate information from the WisDOT Roundabout Guide – (FDM) Develop criteria for identify when/where overhead signs could be used
Roundabout Policy		Develop formal policy requiring consideration of roundabouts at appropriate locations on the state trunk highway system.
Federal Aid Local Agency Projects		Require MDOT’s Local Agency Program projects to follow all aspects of FHWA and MDOT policies and guidance
Information Requirements for Roundabout Reviews	WisDOT Roundabout Guide (FDM 11-26-5)	Require uniform information be provided to MDOT’s Geometric Design Unit (GDU) for roundabout reviews.

Topic	Source(s)	Comments
Pedestrian Facilities	NCHRP Report 674 Findings from the Oakland County lawsuit	Update guide based on latest research Consider installing Z-style crosswalks at multi-lane roundabouts Develop criteria to determine when specific pedestrian facilities should be used Consider including conduit for future pedestrian signals (PHB) at multi-lane roundabouts Consider using raised speed tables and Rectangular Rapid Flashing Beacons (RRFB) at pedestrian crossings
Traffic Counting Methodology		Develop standard traffic counting methodology for roundabouts
Complete Street Policy		Incorporate complete street policy recommendations into the MDOT Roundabout Guide
Roundabout Typical Details		Add standard typicals for roundabout design to the MDOT Road Design Manual
3-lane Roundabouts		Minimize use of radial designs
Roundabouts at Interchanges		Where teardrops are being considered, effect on capacity of next downstream entry must be assessed carefully
Expandable Roundabouts		Consideration of building expandable roundabouts – accommodate opening day volumes, designed to be converted to ultimate layout
Crash Analysis		Utilize the new Michigan specific predictive crash model
Modeling Software		Consideration should be given to the software packages that are acceptable to determine/predict the capacity and delay of a roundabout. Consider the use of the HCM 2010 methodology, RODEL, ARCADY, Synchro 8.0, and other software packages.
Combined Lane Use/Destination Signs		Eliminate combined lane use/destination signs. Include coordination with MDOT Signing Unit
Benefit/Cost Calculations		Appendix B: Update various costs for B/C calculations

Topic	Source(s)	Comments
Geometric Delay		Eliminate table 1 (page 6) and all text references to adjustment factors for geometric delay. Carry through other parts of the guide as applicable. Replace with text requiring direct comparison of RODEL, ARCADY, or Synchro 8.0 delay with other software results for stop control/signal

8.0 List of References

AASHTO SafetyAnalyst Software. <http://www.safetyanalyst.org>

Persaud, B. N., R. A. Retting, P. E. Gardner, and D. Lord. Safety Effect of Roundabout Conversions in the United States: Empirical Bayes Observational Before-After Study. In *Transportation Research Record 1751*, TRB, National Research Council, Washington, D.C., 2002.

Rodegerdts, L., M. Blogg, E. Wemple, E. Myers, M. Kyte, M. Dixon, G. List, A. Flannery, R. Troutbeck, W. Brilon, N. Wu, B. Persaud, C. Lyon, D. Harkey, and D. Carter. *NCHRP Report 572 Roundabouts in the United States*. TRB, National Research Council, Washington, D.C., 2007.

Rodegerdts, L., J. Bansen, C. Tiesler, J. Knudsen, E. Myers, M. Johnson, M. Moule, B. Persaud, C. Lyon, S. Hallmark, H. Isebrands, R. B. Crown, B. Guichet, and A. O'Brien. *NCHRP Report 672 Roundabout: An Informational Guide*. TRB, National Research Council, Washington, D.C., 2010.

Maycock, G. and Hall R. D. Crashes at Four-Arm Roundabouts. TRRL Laboratory Report LR 1120. Transport and Road Research Laboratory, Crowthorne, England, 1984.

Crown, B. "An Introduction to Some Basic Principles of U.K. Roundabouts Design." Presented at the ITE District 6 Conference on Roundabouts, Loveland, Colorado, October 1998.

Leaf, W. A. and D. F. Preusser. *Literature Review on Vehicle Travel Speeds and Pedestrian Injuries*. Final Report DOT HS 809 021. National Highway Traffic Safety Administration, Department of Transportation, Washington, D.C., October 1999.

Schroeder, B., R. Hughes, N. Rouphail, C. Cunningham, K. Salamati, R. Long, D. Guth, R.W. Emerson, D. Kim, J. Barlow, B.L. Bentzen, L. Rodegerdts, and E. Myers. *NCHRP Report 674 Crossing Solutions at Roundabouts and Channelized Turn Lanes for Pedestrians with Vision Disabilities*. TRB, National Research Council, Washington, D.C., 2011.

Daniels, S., Brijs, T., Nuyts, E., Wets, G. "Injury crashes with bicyclists at roundabouts: influence of some location characteristics and the design of cycle facilities." *Journal of Safety Research*. Vol. 40, Issue 2, pp. 141-148. (2009)

Manual on Uniform Traffic Control Devices for Streets and Highways. FHWA, Washington, D.C., 2009.

Roundabout Guide. Wisconsin Department of Transportation. 2011.

Isebrands, H., S. Hallmark, E. Fitzsimmons, and J. Stroda. *Toolbox to Evaluate the Impacts of Roundabouts on a Corridor or Roadway Network*. Center for Transportation Research and Education, Ames, IA, July 2008.

Mandavilli, S., E. R. Russell, and M. J. Rys. *Impact of Modern Roundabouts on Vehicular Emissions*. Proceedings of the 2003 Mid-Continent Transportation Research Symposium, Ames, IA, August 2003.

Varhelyi, Andras. *The Effects of Small Roundabouts on Emissions and Fuel Consumption: A Case Study*. Transportation Research Part D. Vol. 7. 2002, pp. 65-71.

Department of Blindness and Low Vision Studies – Western Michigan University, Institute for Transportation Research and Education – North Carolina State University, Accessible Design for the Blind. Kittelson & Associates. *Road Commission for Oakland County PHB and RRFB Study*. 2011

Council, F., E. Zaloshnja, T. Miller, and B. Persaud (2005). Crash Cost Estimates by Maximum Police-Reported Injury Severity within Selected Crash Geometries. Federal Highway Administration Report FHWA-HRT-05-051, McLean, VA.

Savolainen, P., Gates, T., Datta, T., Kawa, J., Flannery, A., Retting, R., “Improving Driver’s Ability to Safely and Effectively Use Roundabouts: Educating the Public to Negotiate Roundabouts.” 2011

Sawyers, C. “Mini-Roundabouts, A Definitive Guide for the installation of small and mini-roundabouts”. 2008

Mini-Roundabouts Technical Summary. FHWA, Washington D.C., 2010.



APPENDIX

APPENDIX A: ADDITIONAL SITE VISIT

ADDITIONAL M-41 AT M-28 ROUNDABOUT SITE VISIT

The result of the site visit is detailed as followed:

M-41 at M-28 in Marquette, MI

- Overall good yielding behavior, very little conflicts observed
- No pedestrians noted
- As shown in the photo below, the lane assignment sign along the north leg of the roundabout has both lanes as through only lanes, instead of one through lane and one shared through/right turn lane. The lane assignment sign also may block motorists sight of the other two signs.





APPENDIX B: CURE PLOTS



CURE PLOTS OF RECALIBRATED SPFS

Total Crashes



3-legged stop-controlled (urban)

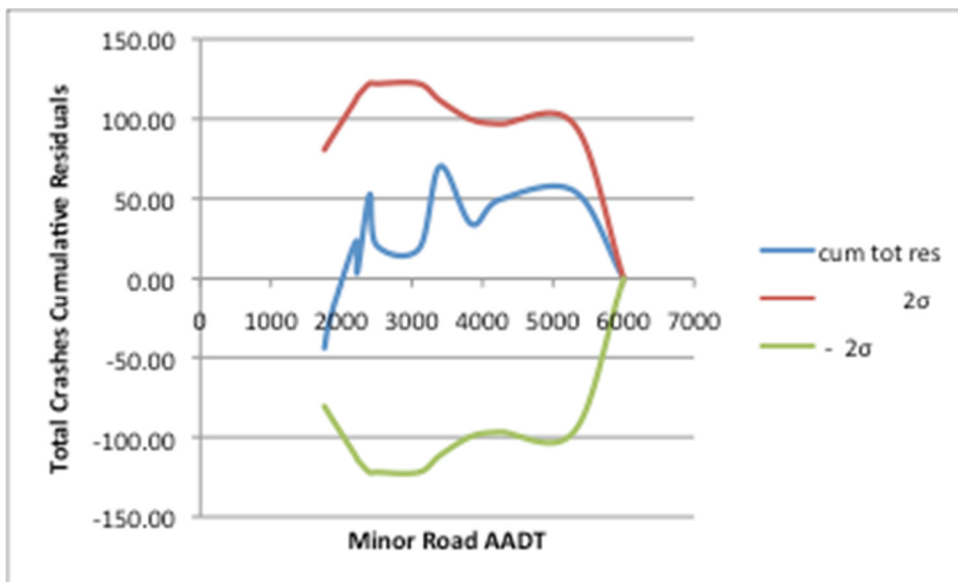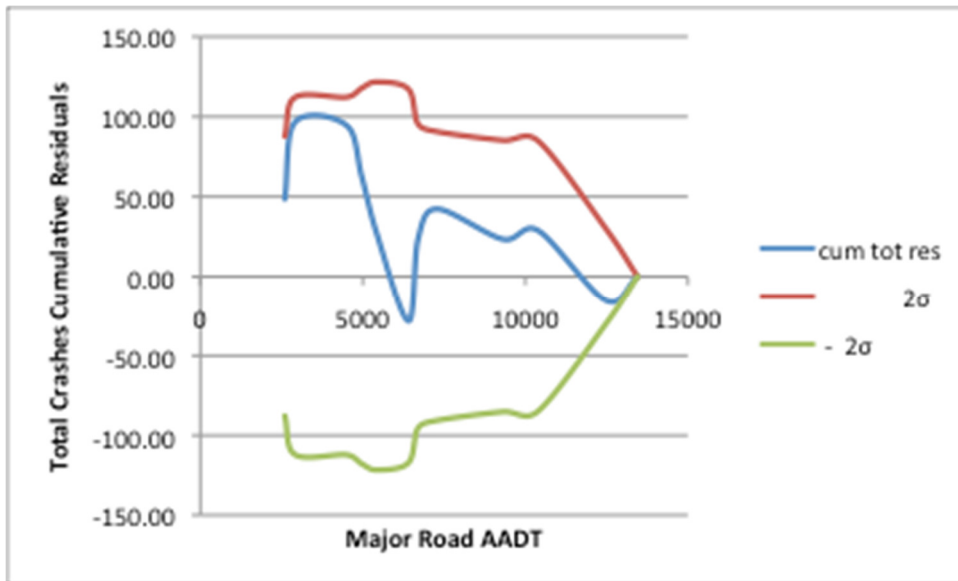



3-legged all-way stop-controlled (rural)

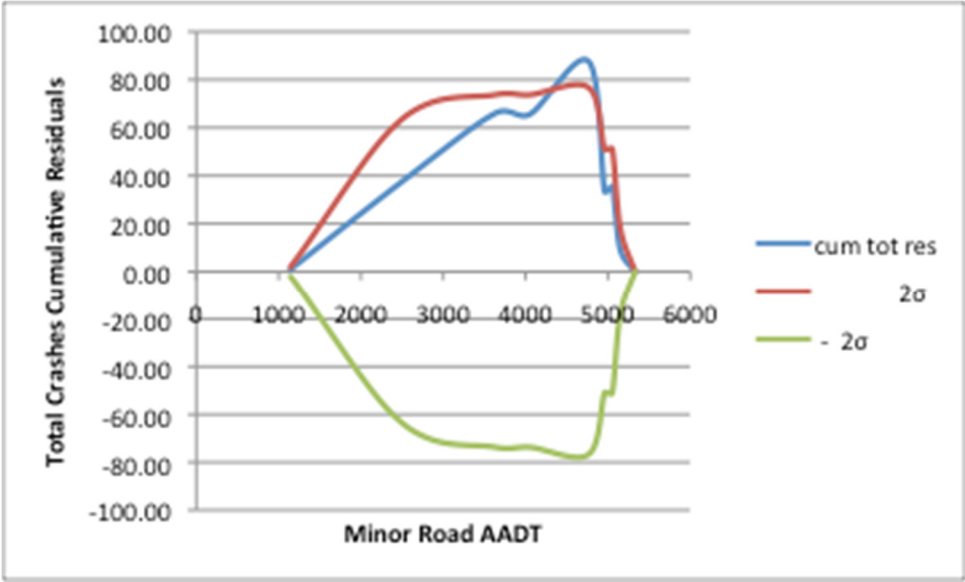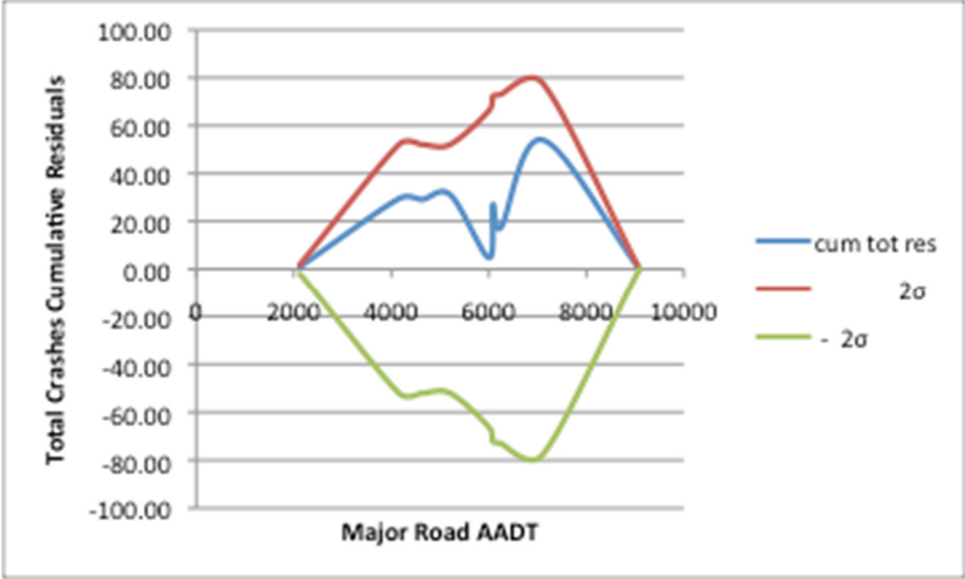



3-legged signalized (rural)

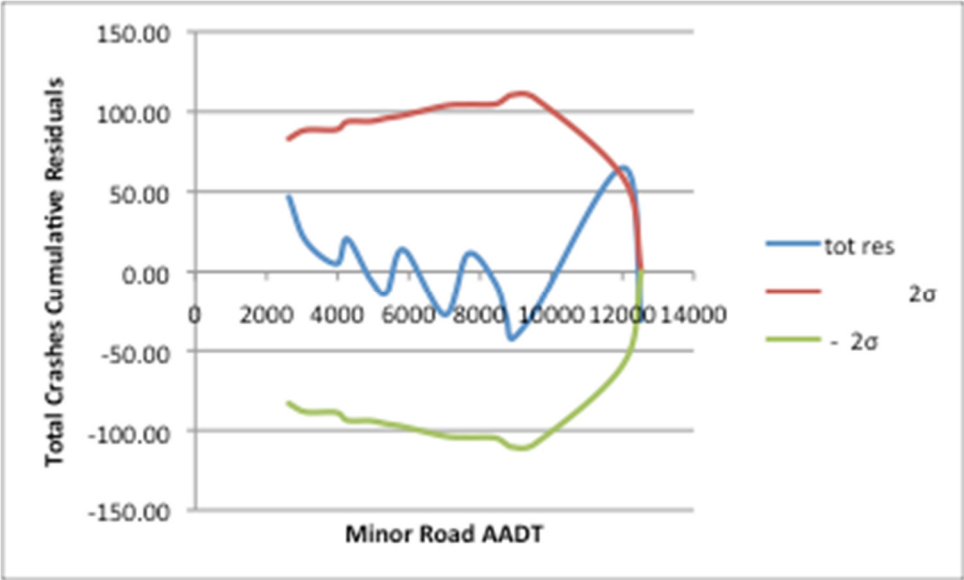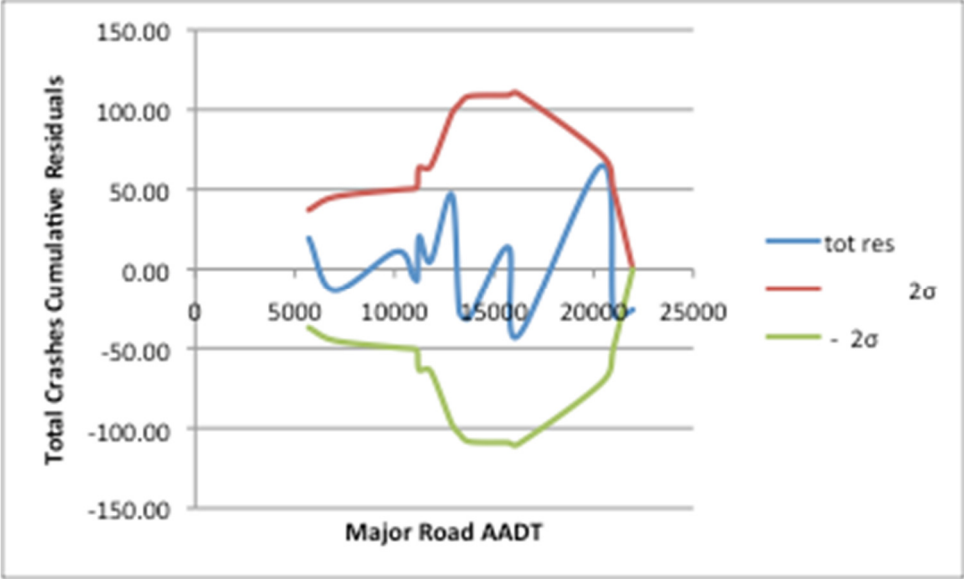



4-legged stop-controlled (urban)

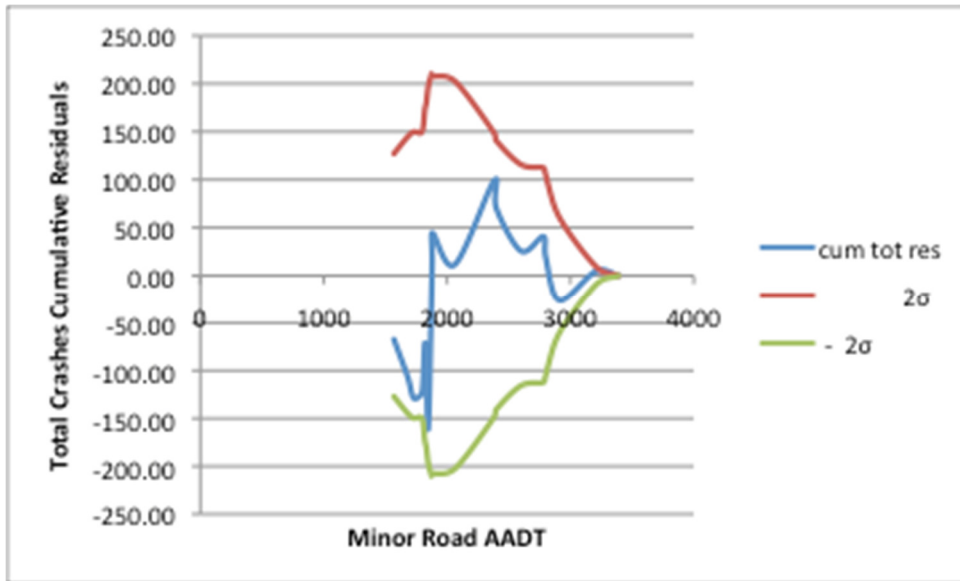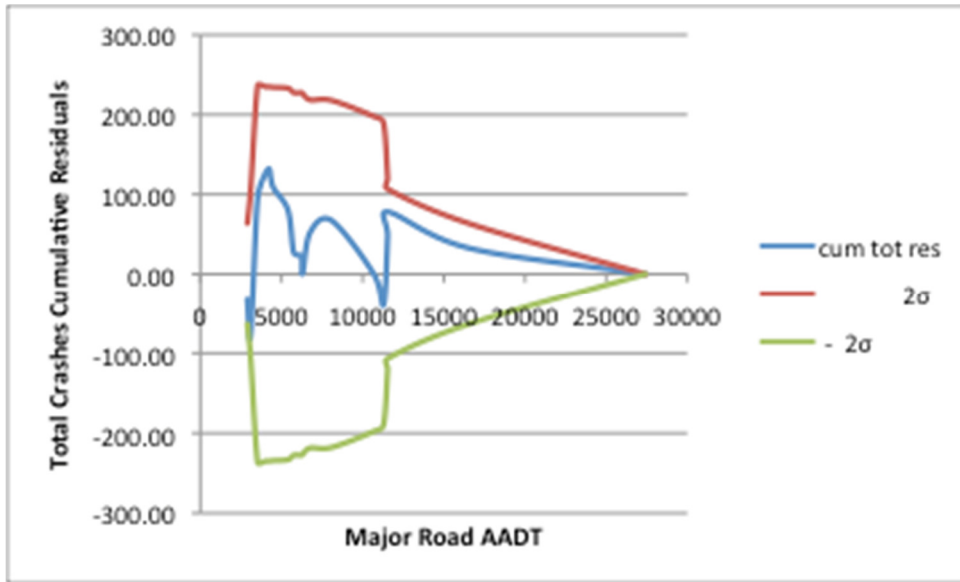

4-legged all-way stop-controlled (rural)

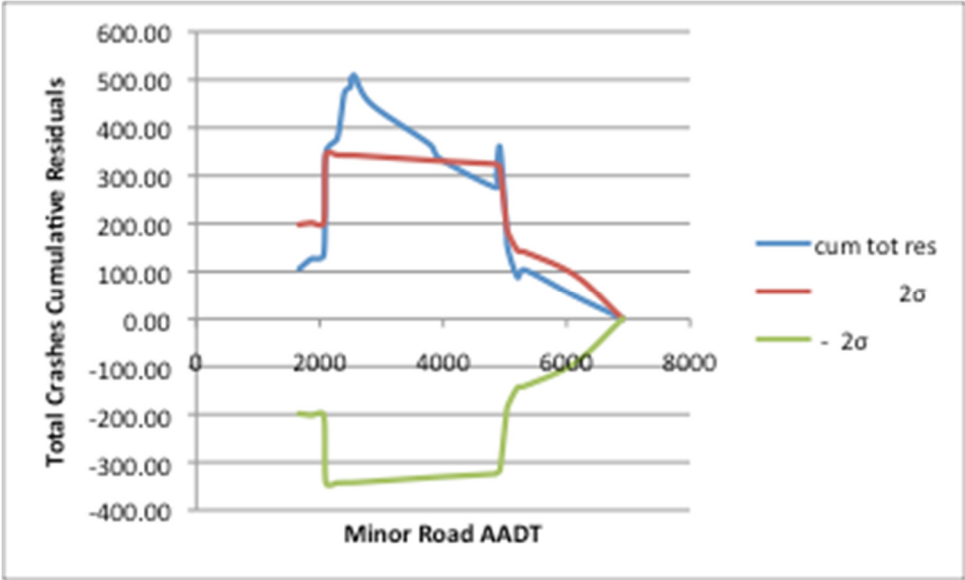
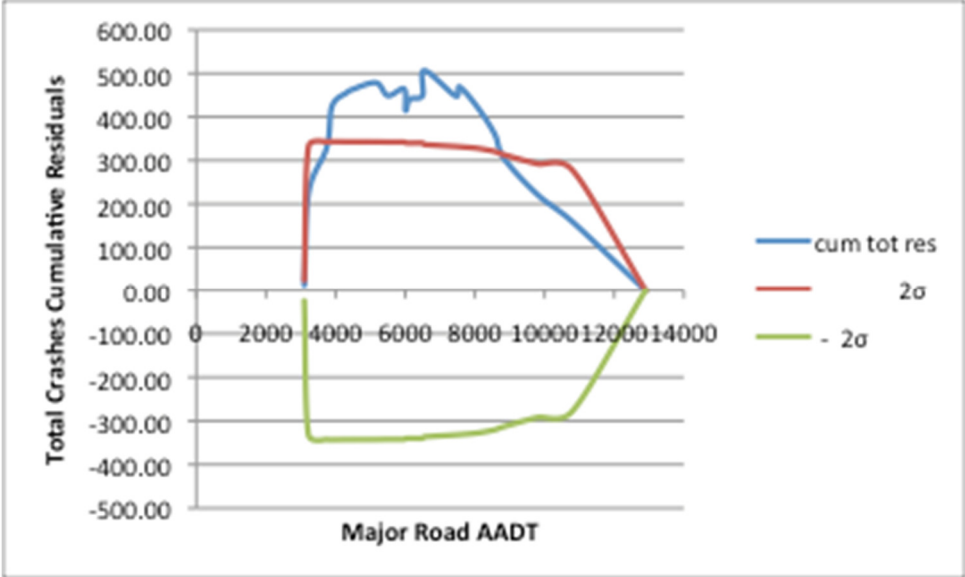


4-legged signalized (rural)

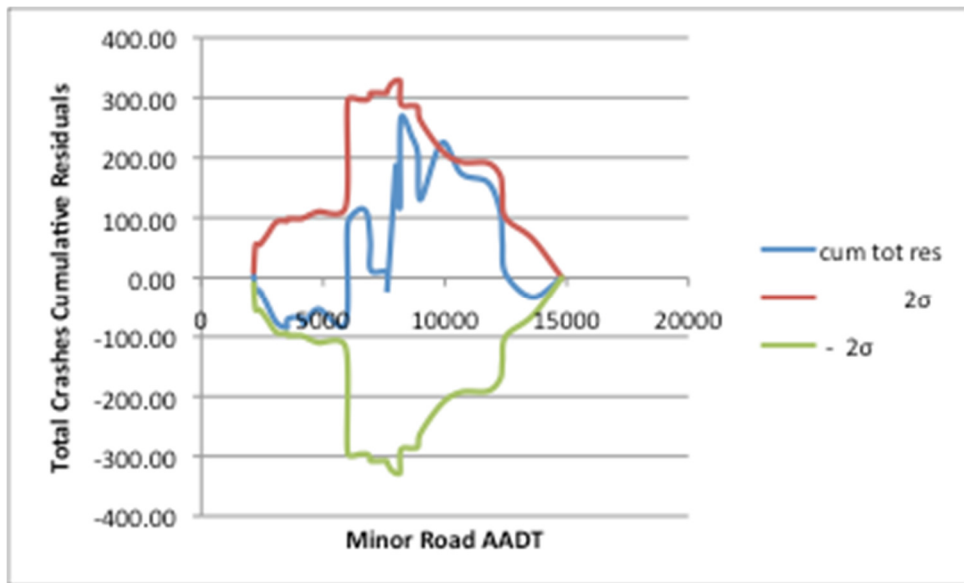
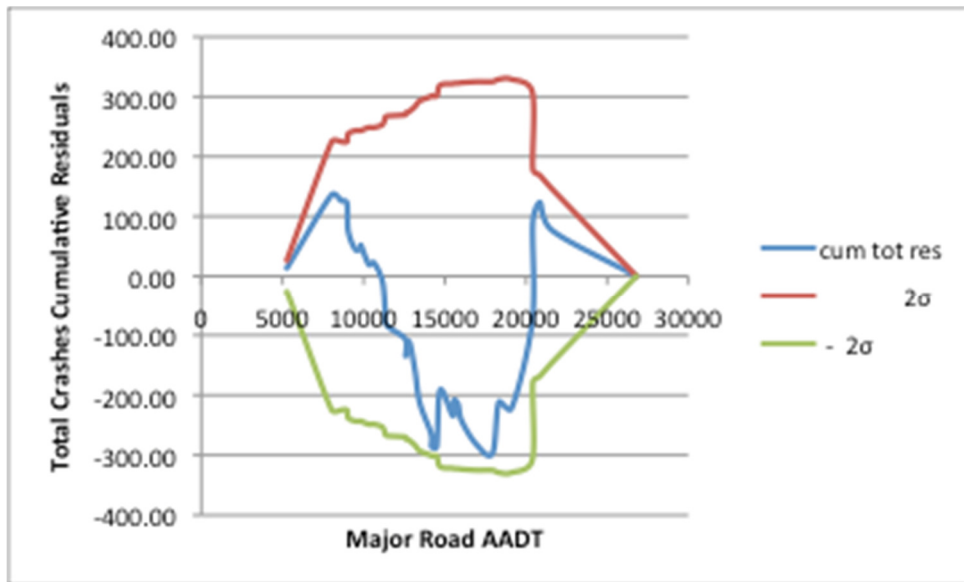


Injury Crashes



3-legged stop-controlled (urban)

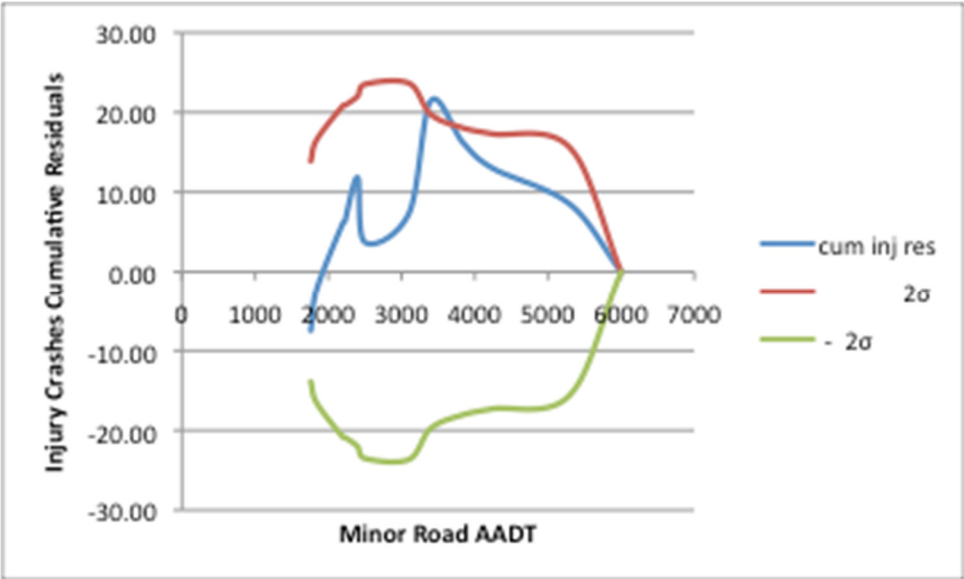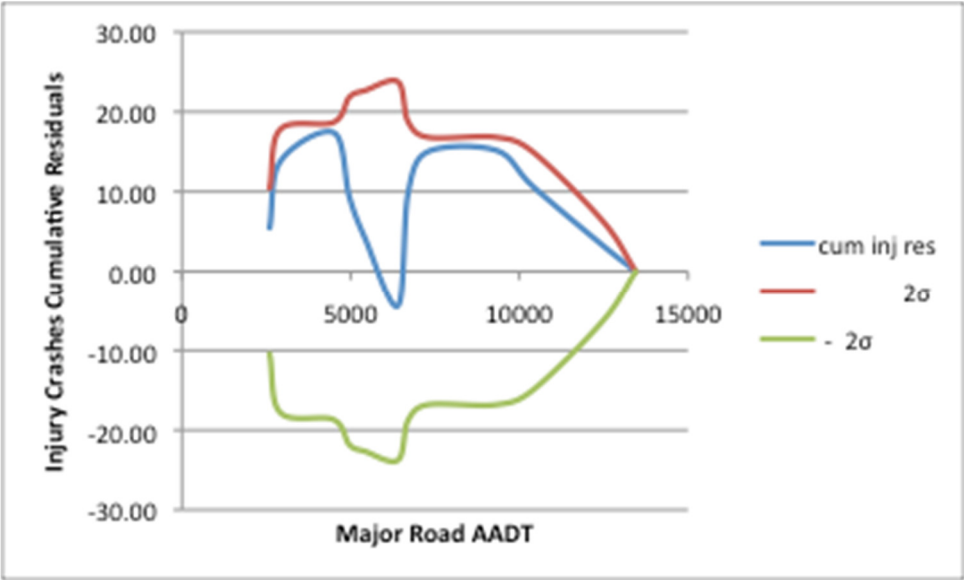



3-legged all-way stop-controlled (rural)

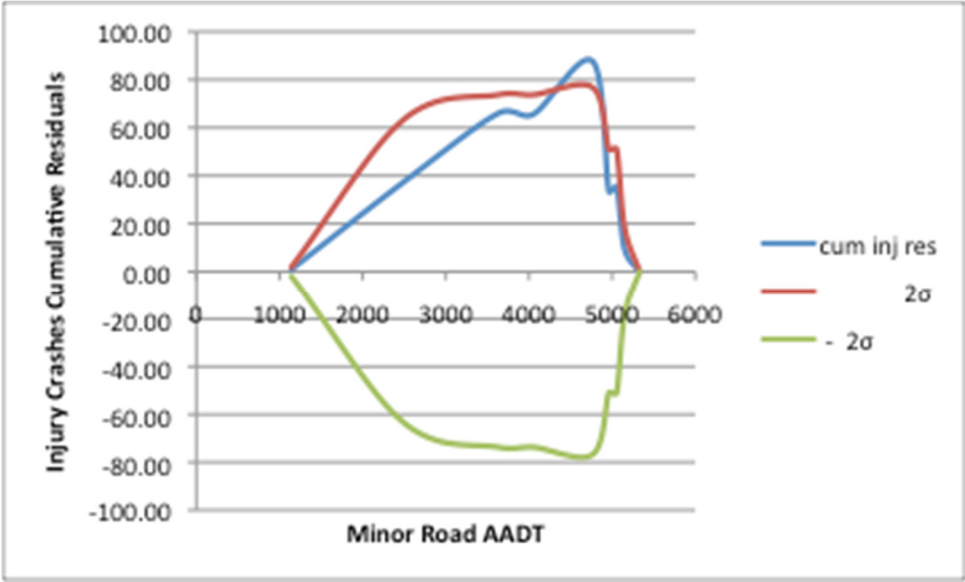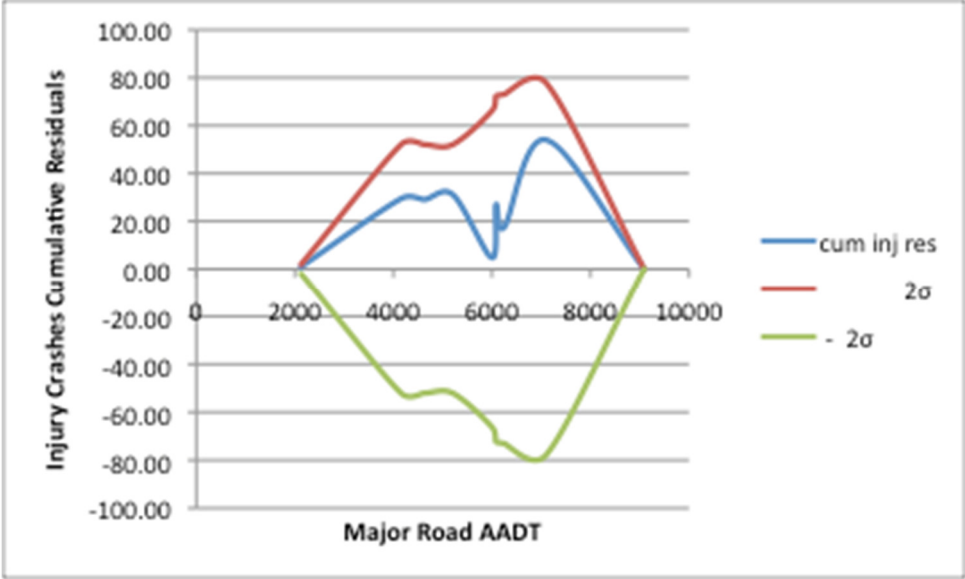



3-legged signalized (rural)

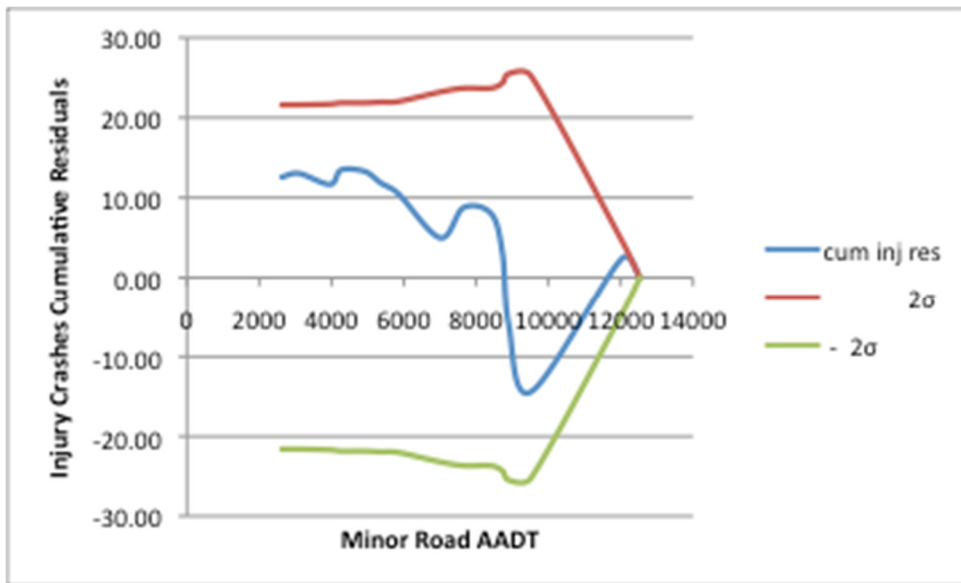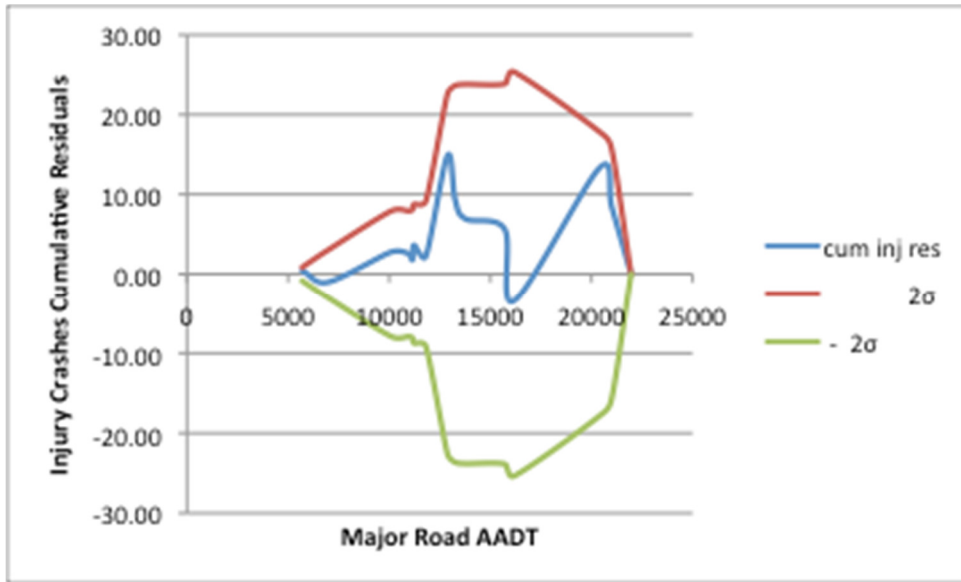



4-legged stop-controlled (urban)

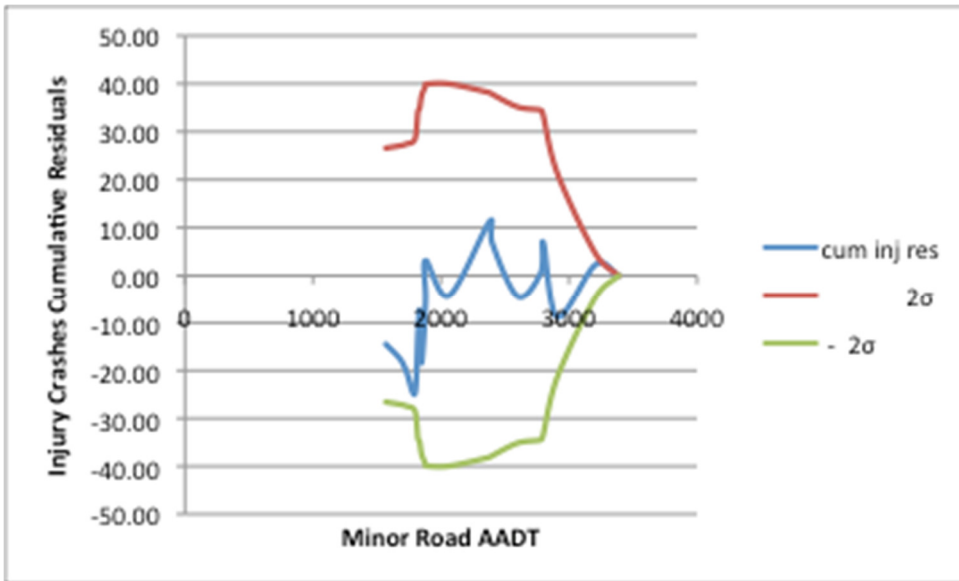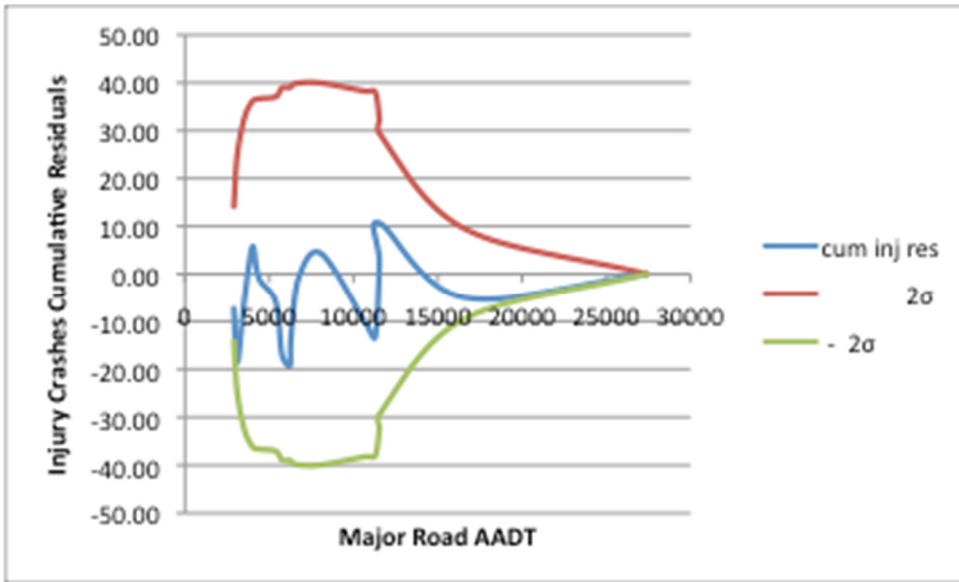

4-legged all-way stop-controlled (rural)

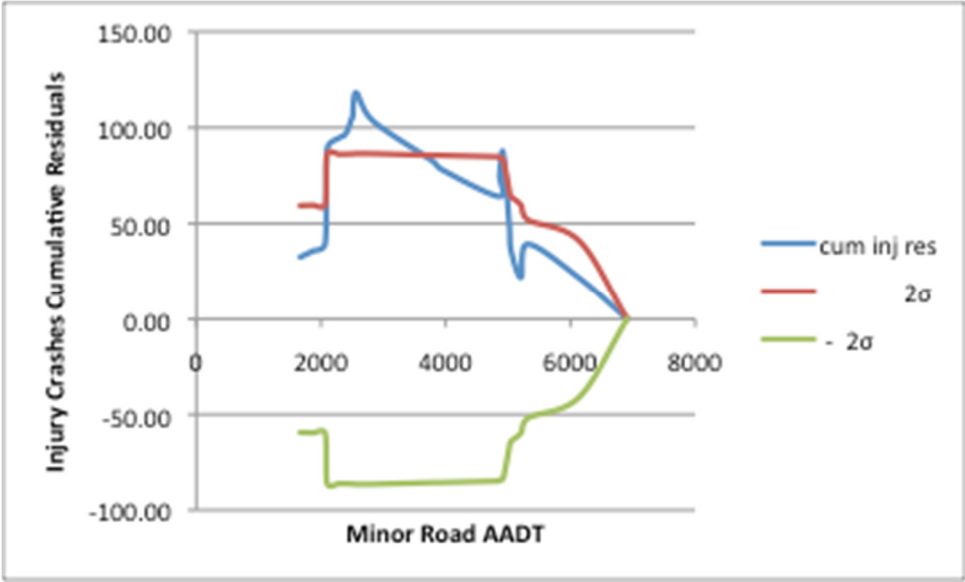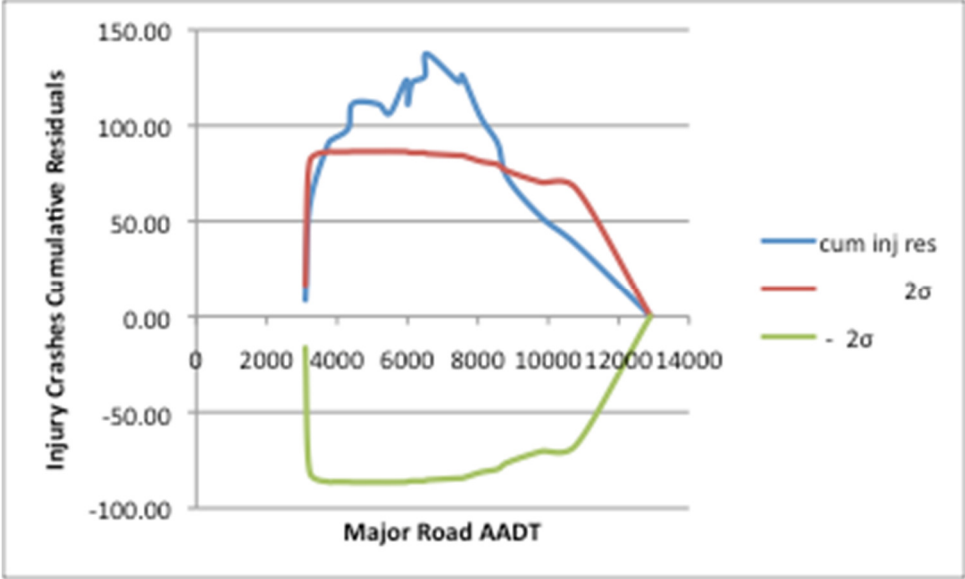

4-legged signalized (rural)

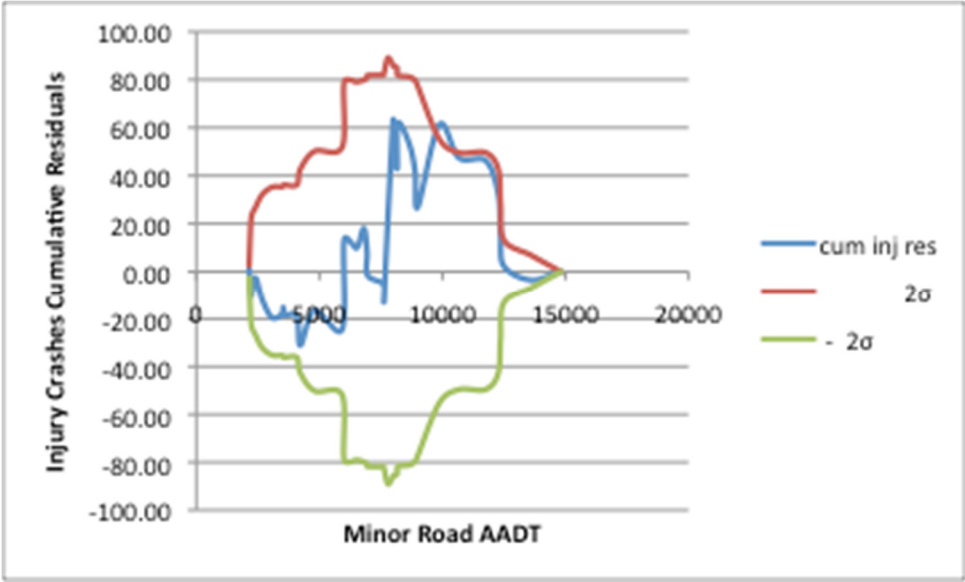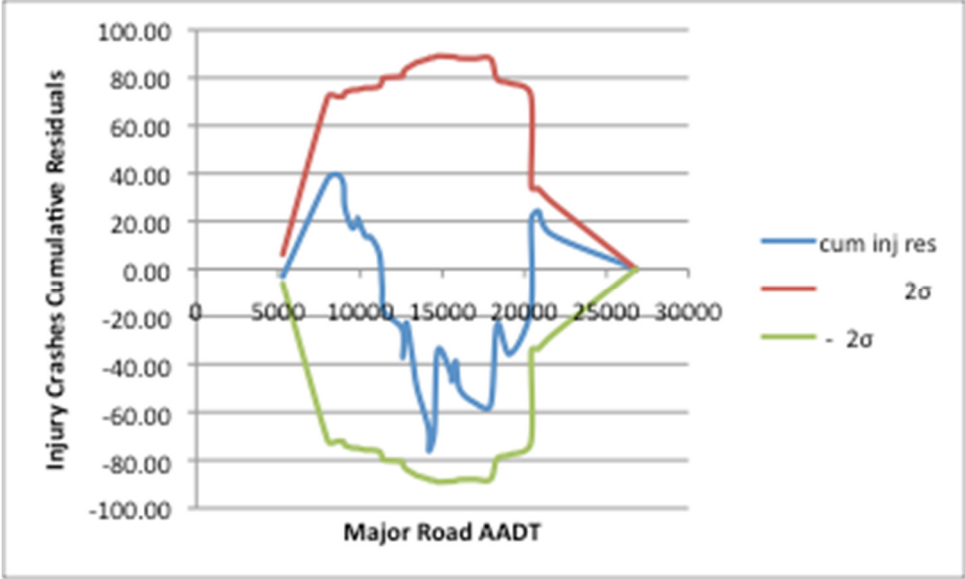

APPENDIX C: ROUNDABOUT DETAILED CRASH DATA

All Roundabouts


Intersection	Total Crashes	Environment	Before Control Type	Roundabout Type	Construction Year	Before Crashes	After Crashes	Before Years	After Years	Average Annual Total Before	Average Annual Total After	Average Annual Injury Before	Average Annual Injury After	Before ADT	Before Crash Rate	After ADT	After Crash Rate
3rd St & Western Ave	17	Urban	Stop Controlled	single lane	2006	8	8	5	4	1.60	2.00	0.00	0.25	2385	1.84	2000	2.74
68th Ave & Randall St/ State	83	Rural	awsc	double lane	2007	48	27	6	3	8.00	9.00	1.50	1.00	16787	1.31	14100	1.75
7 Mile Rd & Brewer Ave	18	Rural	Stop Controlled	single lane	2007	13	3	6	3	2.17	1.00	0.50	0.00	3615	1.64	2831	0.97
Baldwin Rd/Indianwood Rd & S. Coats Rd	114	Rural	Stop Controlled	double lane	2004	35	64	3	6	11.67	10.67	2.00	1.17	18255	1.75	12160	2.40
Bennett Rd & Hulett Rd	59	Rural	Stop Controlled	single lane	2004	25	27	3	6	8.33	4.50	3.67	0.50	8619	2.65	7536	1.64
Cedar St & Holbrook Dr	28	Rural	Stop Controlled	double lane	2009	19	4	8	1	2.38	4.00	0.13	1.00	10894	0.60	9662	1.13
Cherry St & Jefferson Ave	27	Urban	Signalized	single lane	2007	22	4	6	3	3.67	1.33	1.33	0.00	10705	0.94	10417	0.35
Cooley Lake Rd & Bogie Lake Rd	146	Rural	Signalized	single lane	2007	94	38	6	3	15.67	12.67	5.00	1.33	25040	1.71	21720	1.60
Cooley Lake Rd & Oxbow Lake Rd	35	Rural	Stop Controlled	single lane	2007	17	13	6	3	2.83	4.33	0.50	0.67	11710	0.66	11980	0.99
Geddes Rd & Superior Rd	2	Rural	awsc	double lane	2008	1	1	7	2	0.14	0.50	0.00	0.00	17071	0.02	17140	0.08
Hamburg Rd & Winans Lake Rd	55	Rural	Stop Controlled	single lane	2009	49	3	8	1	6.13	3.00	0.88	0.00	16390	1.02	15155	0.54
Hayes Rd & 25 Mile Rd	63	Rural	Stop Controlled	single lane	2005	23	36	4	5	5.75	7.20	1.25	0.40	12400	1.27	15825	1.25
I-94 Business (Main St) & 5th St	20	Urban	Stop Controlled	single lane	2009	17	0	8	1	2.13	0.00	0.00	0.00	14756	0.39	14615	0.00
I-94 Business (Main St) & Riverview Dr	46	Urban	Signalized	single lane	2009	42	1	8	1	5.25	1.00	0.00	0.00	16478	0.87	16321	0.17
Lake Lansing Rd & Chamberlain Dr	52	Urban	Stop Controlled	double lane	2007	25	20	6	3	4.17	6.67	0.83	1.33	15856	0.72	16641	1.10
M-46/Apple Ave & M-37/Newaygo Rd	59	Rural	awsc	single lane	2009	46	2	8	1	5.75	2.00	1.75	0.00	16301	0.97	15964	0.34
Main St & 3rd St	37	Urban	Stop Controlled	single lane	2003	9	25	2	7	4.50	3.57	0.50	0.29	19656	0.63	14930	0.66
Michigan Ave & Rankin St	74	Urban	Stop Controlled	double lane	2004	34	28	3	6	11.33	4.67	1.67	0.50	2000	15.53	2000	6.39
Michigan Ave & Washington Square	73	Urban	awsc	single lane	2007	44	15	6	3	7.33	5.00	0.33	0.33	8950	2.24	9093	1.51
Nixon Rd & Huron Pkwy	28	Urban	awsc	single lane	2009	26	1	8	1	3.25	1.00	0.75	0.00	13665	0.65	12376	0.22
Old US-27/North Hwy & Livingston Blvd	21	Rural	Stop Controlled	single lane	2006	9	7	5	4	1.80	1.75	0.20	0.25	1500	3.29	1500	3.20
Romeo Plank Rd & 19 Mile Rd	52	Rural	Signalized	double lane	2008	33	17	7	2	4.71	8.50	0.86	0.50	36910	0.35	31100	0.75
Romeo Plank Rd & Cass Ave	89	Rural	Signalized	double lane	2008	52	31	7	2	7.43	15.50	1.71	1.00	27730	0.73	28190	1.51
US-127 BR & Mission St	5	Rural	Stop Controlled	single lane	2009	4	0	8	1	0.50	0.00	0.00	0.00	18250	0.08	16400	0.00
Utica Rd & Dodge Park Rd	122	Urban	Signalized	double lane	2009	109	5	8	1	13.63	5.00	1.38	0.00	31000	1.20	27630	0.50
Wealthy St & Jefferson Ave	9	Urban	Signalized	single lane	2008	130	17	7	2	18.57	8.50	4.86	1.00	28285	1.80	21875	1.06
Wealthy St & Lafayette Ave	158	Urban	Signalized	single lane	2008	8	0	7	2	1.14	0.00	0.00	0.00	30168	0.10	21444	0.00
Willow Hwy & Canal Rd	29	Rural	awsc	single lane	2008	20	7	7	2	2.86	3.50	0.00	0.50	9371	0.84	9784	0.98
Wood St & Sam's Way	23	Urban	Stop Controlled	double lane	2007	7	13	6	3	1.17	4.33	0.17	1.00	7263	0.44	9842	1.21
M-53 SB off ramp & 26-Mile	109	Rural	Stop Controlled	double lane	2009	92	4	8	1	11.50	4.00	2.63	0.00	35986	0.88	36493	0.30
M-53 NB off ramp & 26-Mile	22	Rural	Stop Controlled	double lane	2009	16	3	8	1	2.00	3.00	0.50	0.00	22863	0.24	23494	0.35
I-75 SB off ramp & M-81/Washington Road	7	Rural	Signalized	single lane	2006	5	0	5	4	1.00	0.00	0.00	0.00	19268	0.14	15359	0.00
I-75 NB off ramp & M-81/Washington Road	32	Rural	Signalized	single lane	2006	26	2	5	4	5.20	0.50	0.80	0.00	19320	0.74	13570	0.10
Maple Rd & M-14 EB off ramp	39	Urban	Stop Controlled	double lane	2007	17	20	6	3	2.83	6.67	1.50	0.67	13546	0.57	12953	1.41
Maple Rd & M-14WB off ramp	66	Urban	Stop Controlled	double lane	2007	42	16	6	3	7.00	5.33	1.67	0.67	10241	1.87	9276	1.58
Maple Rd & Drake Rd	454	Urban	Signalized	triple lane	2007	194	202	6	3	32.33	67.33	6.33	4.67	36510	2.43	37200	4.96
Maple Rd & Farmington Rd	466	Urban	Signalized	triple lane	2007	244	181	6	3	40.67	60.33	6.67	4.33	36380	3.06	36640	4.51
Whitmore Lake Rd & Lee Rd	191	Urban	Stop Controlled	triple lane	2006	29	159	5	4	5.80	39.75	1.40	2.50	29493	0.54	28056	3.88
US-23 SB off ramp & Lee Rd	152	Urban	Stop Controlled	triple lane	2006	57	71	5	4	11.40	17.75	1.80	0.00	21434	1.46	25785	1.89
US-23 NB off ramp & Lee Rd	57	Urban	Stop Controlled	triple lane	2006	14	34	5	4	2.80	8.50	0.80	0.00	22565	0.34	26571	0.88
14 Mile Rd & Farmington Rd	393	Urban	Signalized	triple lane	2008	255	115	7	2	36.43	57.50	8.57	3.00	35460	2.81	32960	4.78

Rural Roundabouts

In the “before” period, 22.81% of the crashes resulted in an injury or a fatality. In the “after” period only 9.34% of the crashes resulted in an injury or a fatality. There were also five fatalities (0.80%) observed in the “before” period and in the “after” period there were no observed fatal crashes.


Severity Type	“Before” Severity		“After” Severity	
Fatal	5	0.80%	0	0.00%
A-Level	11	1.75%	2	0.69%
B-Level	36	5.74%	7	2.42%
C-Level	91	14.51%	18	6.23%
PDO	484	77.19%	262	90.66%
Total	627	100.00%	289	100.00%

Before Severity

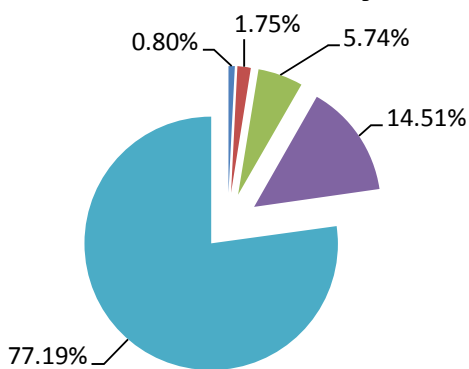

■ Fatal ■ A-Level ■ B-Level ■ C-Level ■ PDO

After Severity

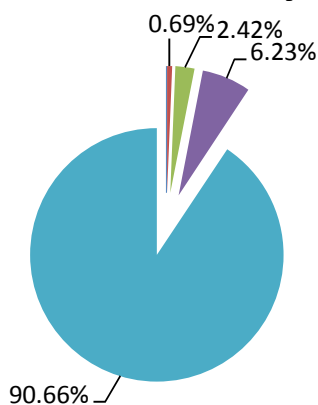


■ Fatal ■ A-Level ■ B-Level ■ C-Level ■ PDO

The largest change in the crash types came from the crash types that often result in the greatest severity of crashes (angle, head-on, head-on left turn, pedestrian, and bike). Most notably, the percent of angle crashes was reduced by over 2.66%. This number may also be greater than 2.66%, because a common error in recording crash types is mistaking sideswipe crashes as angle crashes especially since an angle crash cannot occur in a roundabout.


Crash Type	"Before" Type		"After" Type	
Angle	123	19.62%	49	16.96%
Head On	5	0.80%	1	0.35%
Head On Left turn	25	3.99%	4	1.38%
Pedestrian	3	0.48%	2	0.69%
Bike	3	0.48%	0	0.00%
Rear-end	265	42.26%	85	29.41%
Single Vehicle	16	2.55%	5	1.73%
Sideswipe Opposite	17	2.71%	4	1.38%
Sideswipe Same	42	6.70%	58	20.07%
Other	128	20.41%	81	28.03%
Total	627	100.00%	289	100.00%

Roundabout Crash Type

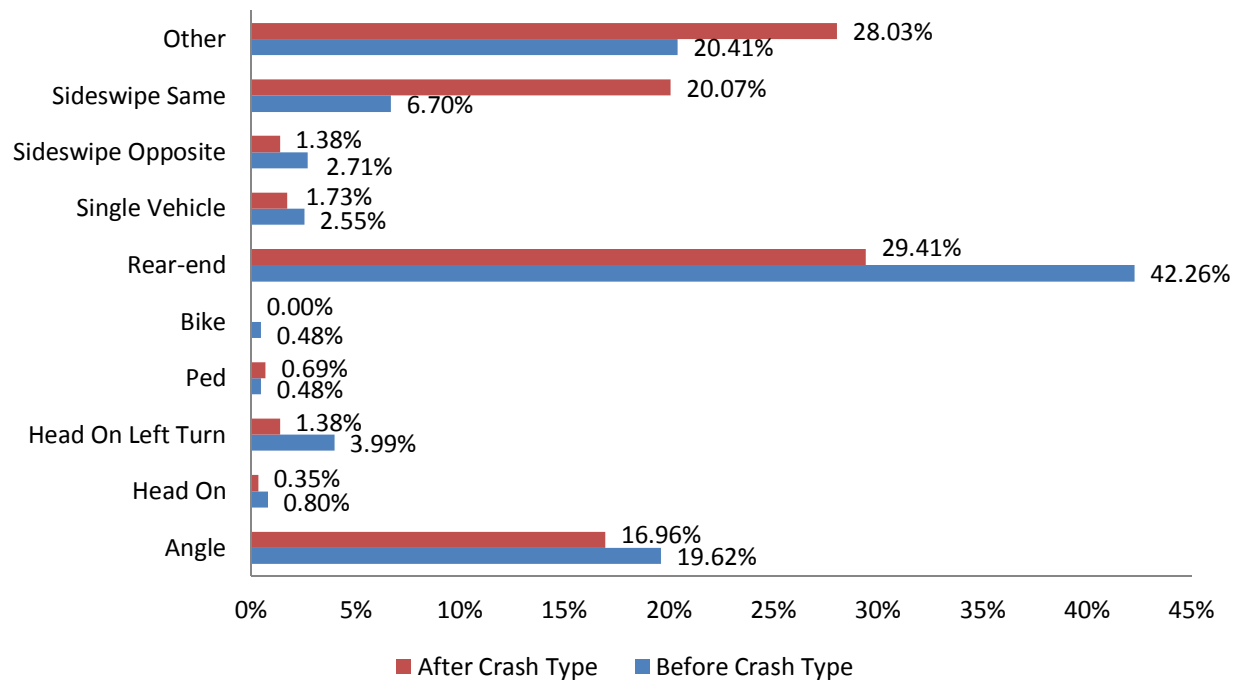

The results of the analysis show that the percent of crashes that occurred during the daytime remained almost the same in the “before” and “after” conditions (68.74% “before” versus 68.86% “after”). A larger percent of crashes occurred during “dark, lighted” conditions in the “after” period (15.92%) than in the “before” period (11.48%). Despite the lighting requirements at roundabout intersections, almost the same percent of crashes occur during the nighttime conditions in the “before” condition as they do in the “after” condition (31.26% “before” versus 31.14% “after”).


Lighting	“Before”		“After”	
Daylight	431	68.74%	199	68.86%
Dawn	21	3.35%	9	3.11%
Dusk	18	2.87%	4	1.38%
Dark, Lighted	72	11.48%	46	15.92%
Dark, Unlighted	75	11.96%	30	10.38%
Other	10	1.59%	1	0.35%
Total	627	100.00%	289	100.00%

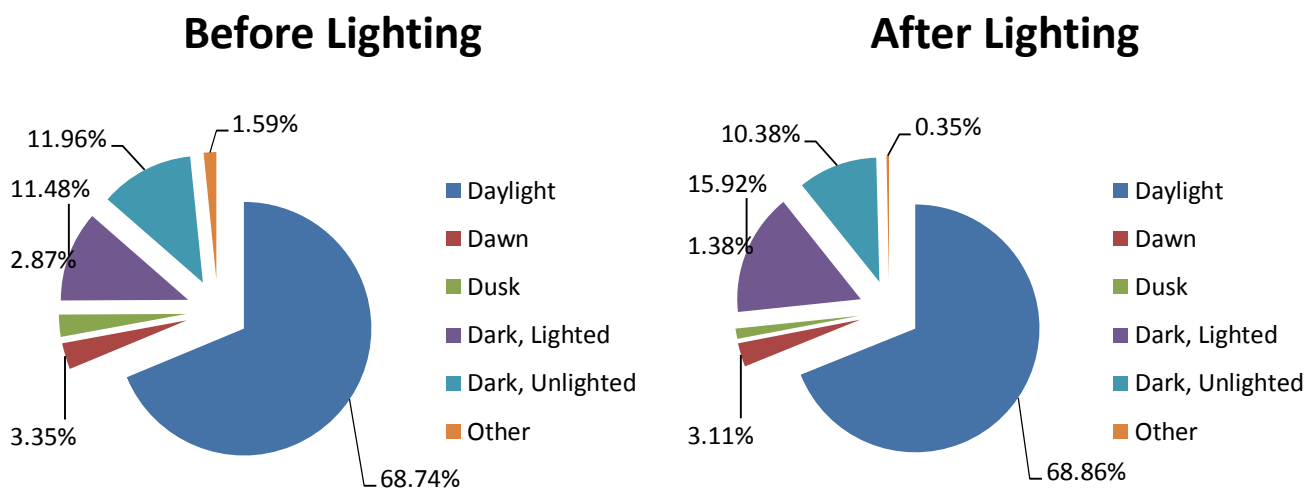

Urban Roundabouts

In the “before” period, 19.81% of the crashes resulted in an injury or a fatality. In the “after” period only 11.56% of the crashes resulted in an injury or a fatality. There were no observed fatalities in either the “before” or “after” time periods.


Severity Type	“Before” Severity		“After” Severity	
Fatal	0	0.00%	0	0.00%
A-Level	9	1.67%	3	1.73%
B-Level	29	5.37%	5	2.89%
C-Level	69	12.78%	12	6.94%
PDO	433	80.19%	153	88.44%
Total	540	100.00%	173	100.00%

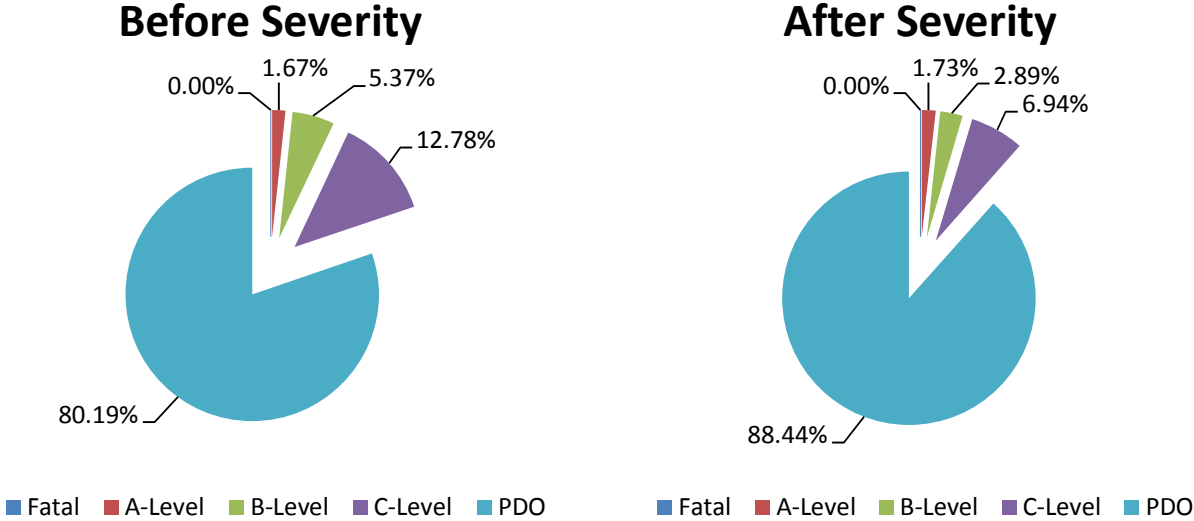

The largest change in the crash types came from the crash types that often result in the greatest severity of crashes (angle, head-on, head-on left turn, pedestrian, and bike). Most notably, the percent of angle crashes was reduced by 19.33%. This number may also be greater than 19.33%, because a common error in recording crash types is mistaking sideswipe crashes as angle crashes especially since an angle crash cannot occur in a roundabout.


Crash Type	"Before" Type		"After" Type	
	Count	Percentage	Count	Percentage
Angle	198	36.67%	30	17.34%
Head On	4	0.74%	1	0.58%
Head On Left turn	21	3.89%	0	0.00%
Pedestrian	13	2.41%	2	1.16%
Bike	10	1.85%	2	1.16%
Rear-end	112	20.74%	56	32.37%
Single Vehicle	8	1.48%	3	1.73%
Sideswipe Opposite	9	1.67%	4	2.31%
Sideswipe Same	65	12.04%	34	19.65%
Other	100	18.52%	41	23.70%
Total	540	100.00%	173	100.00%

Roundabout Crash Type

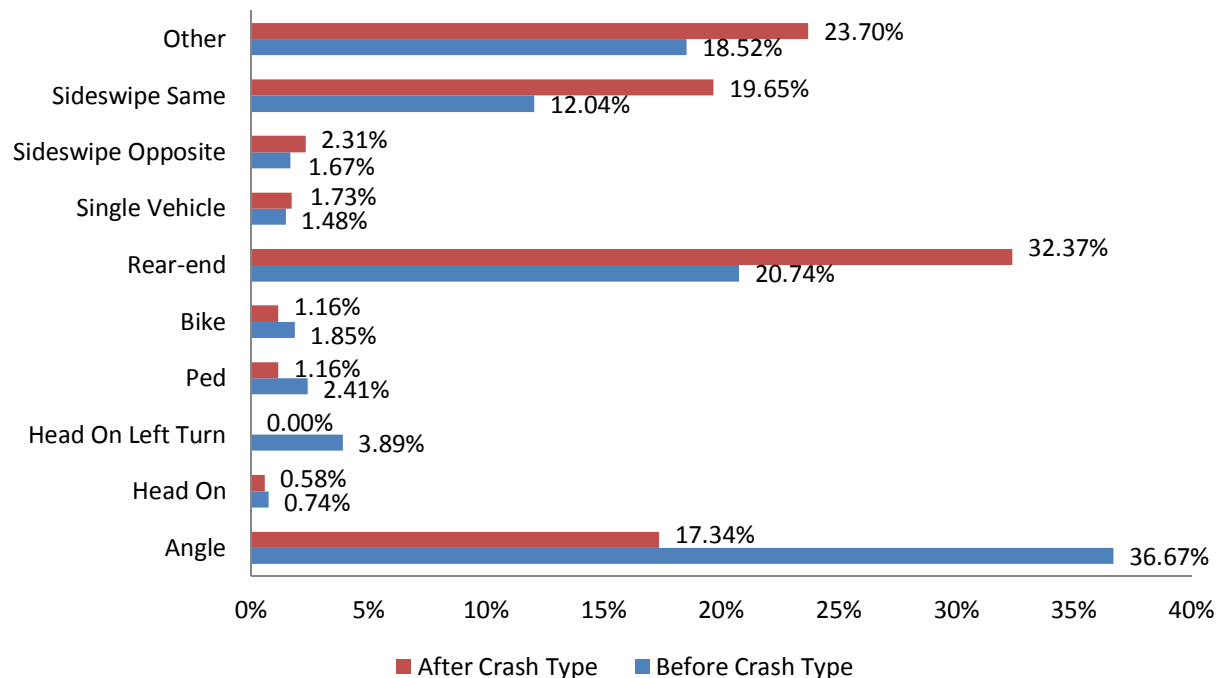

The results of the analysis show that the percent of crashes that occurred during the daytime remained almost the same in the “before” and “after” conditions (79.26% “before” versus 77.46% “after”). A larger percent of crashes occurred during “dark, lighted” conditions in the “after” period (17.34%) than in the “before” period (12.59%). Despite the lighting requirements at roundabout intersections, almost the same percent of crashes occur during the nighttime conditions in the “before” condition as they do in the “after” condition (20.74% “before” versus 22.54% “after”).


Lighting	“Before”		“After”	
Daylight	428	79.26%	134	77.46%
Dawn	6	1.11%	2	1.16%
Dusk	12	2.22%	3	1.73%
Dark, Lighted	68	12.59%	30	17.34%
Dark, Unlighted	21	3.89%	4	2.31%
Other	5	0.93%	0	0.00%
Total	540	100.00%	173	100.00%

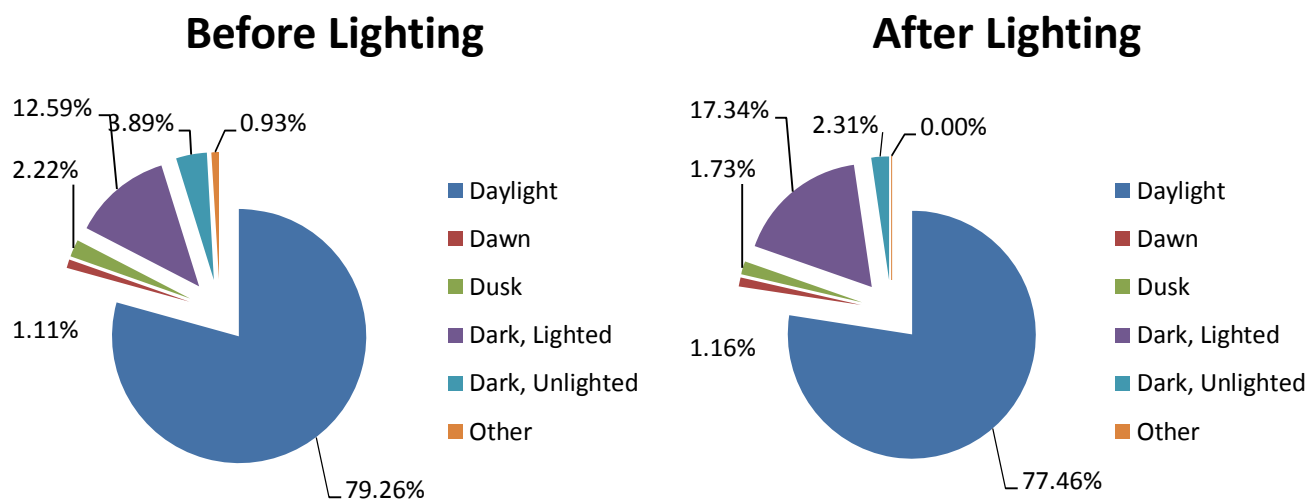

Single Lane Roundabouts

In the “before” period, 23.55% of the crashes resulted in an injury or a fatality. In the “after” period only 9.09% of the crashes resulted in an injury or a fatality. There were also three fatalities (0.47%) observed in the “before” period and in the “after” period there were no observed fatal crashes.


Severity Type	“Before” Severity		“After” Severity	
Fatal	3	0.47%	0	0.00%
A-Level	16	2.51%	1	0.48%
B-Level	40	6.28%	5	2.39%
C-Level	91	14.29%	13	6.22%
PDO	487	76.45%	190	90.91%
Total	637	100.00%	209	100.00%

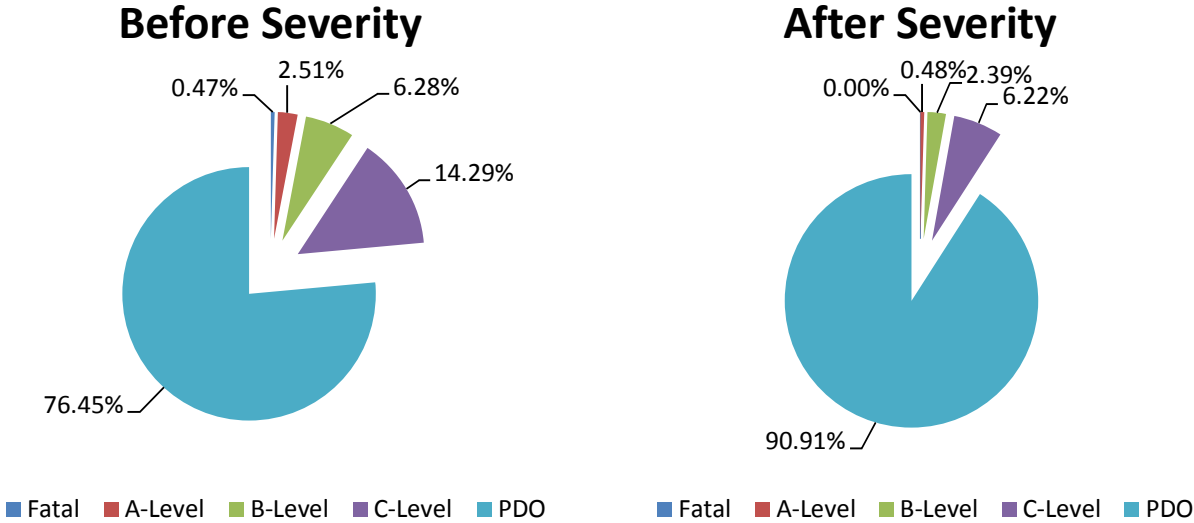

The largest change in the crash types came from the crash types that often result in the greatest severity of crashes (angle, head-on, head-on left turn, pedestrian, and bike). Most notably, the percent of angle crashes was reduced by 14.66%. This number may also be greater than 14.66%, because a common error in recording crash types is mistaking sideswipe crashes as angle crashes especially since an angle crash cannot occur in a roundabout.

Crash Type	"Before" Type		"After" Type	
	Count	Percentage	Count	Percentage
Angle	197	30.93%	34	16.27%
Head On	2	0.31%	1	0.48%
Head On Left turn	34	5.34%	2	0.96%
Pedestrian	10	1.57%	2	0.96%
Bike	7	1.10%	2	0.96%
Rear-end	179	28.10%	74	35.41%
Single Vehicle	13	2.04%	2	0.96%
Sideswipe Opposite	14	2.20%	4	1.91%
Sideswipe Same	49	7.69%	24	11.48%
Other	132	20.72%	64	30.62%
Total	637	100.00%	209	100.00%


Roundabout Crash Type

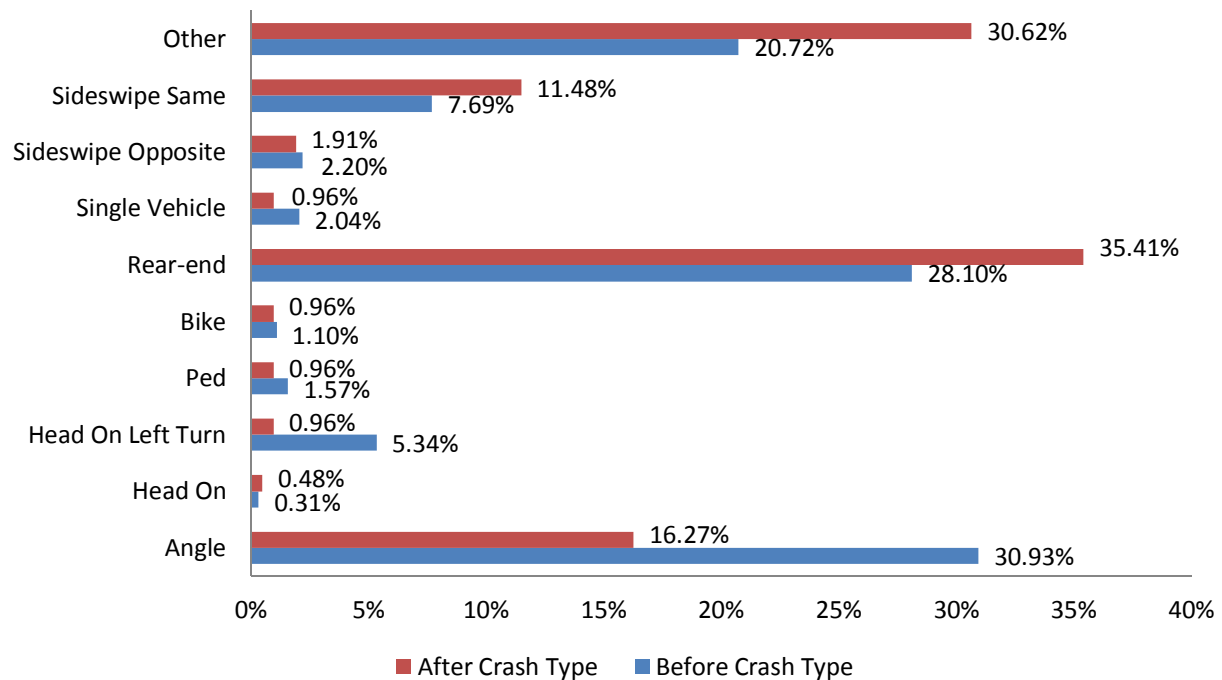


The results of the analysis show that the percent of crashes that occurred during the daytime remained almost the same in the “before” and “after” conditions (75.20% “before” versus 70.81% “after”). A larger percent of crashes occurred during “dark, lighted” conditions in the “after” period (16.75%) than in the “before” period (11.62%). Despite the lighting requirements at roundabout intersections, almost the same percent of crashes occur during the nighttime conditions in the “before” condition as they do in the “after” condition (24.80% “before” versus 29.19% “after”).

Lighting	“Before”		“After”	
Daylight	479	75.20%	148	70.81%
Dawn	17	2.67%	6	2.87%
Dusk	14	2.20%	1	0.48%
Dark, Lighted	74	11.62%	35	16.75%
Dark, Unlighted	41	6.44%	19	9.09%
Other	12	1.88%	0	0.00%
Total	637	100.00%	209	100.00%

Before Lighting

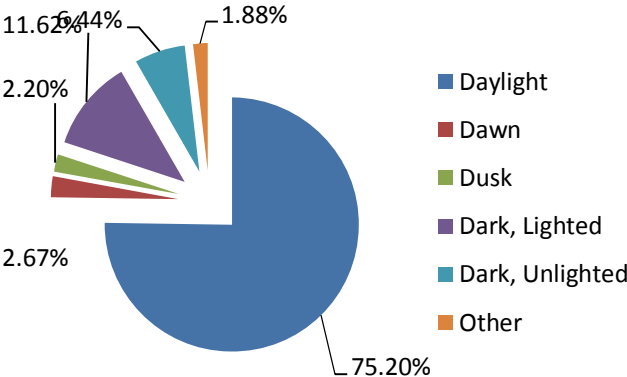


After Lighting

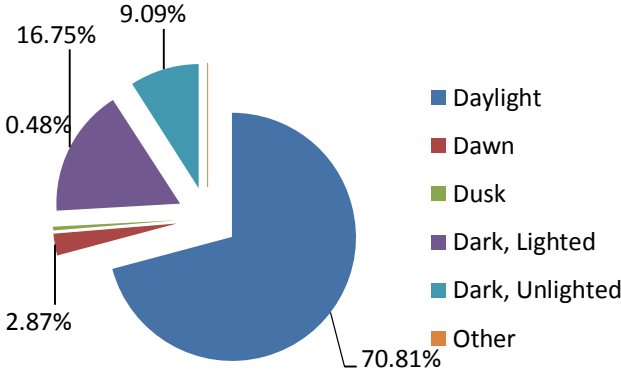

Double Lane Roundabouts

In the “before” period, 18.87% of the crashes resulted in an injury or a fatality. In the “after” period only 11.07% of the crashes resulted in an injury or a fatality. There were also two fatalities (0.38%) observed in the “before” period and in the “after” period there were no observed fatal crashes.


Severity Type	“Before” Severity		“After” Severity	
Fatal	2	0.38%	0	0.00%
A-Level	4	0.75%	4	1.58%
B-Level	25	4.72%	7	2.77%
C-Level	69	13.02%	17	6.72%
PDO	430	81.13%	225	88.93%
Total	530	100.00%	253	100.00%

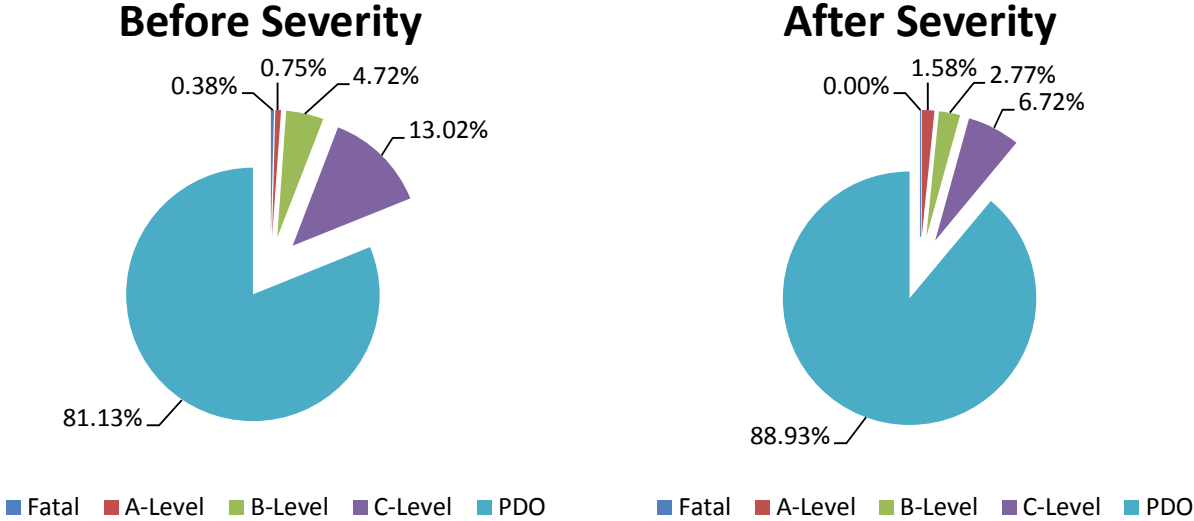

The largest change in the crash types came from the crash types that often result in the greatest severity of crashes (angle, head-on, head-on left turn, pedestrian, and bike). Most notably, the percent of angle crashes was reduced by 5.61%. This number may also be greater than 5.61%, because a common error in recording crash types is mistaking sideswipe crashes as angle crashes especially since an angle crash cannot occur in a roundabout.

Crash Type	"Before" Type		"After" Type	
Angle	124	23.40%	45	17.79%
Head On	7	1.32%	1	0.40%
Head On Left turn	12	2.26%	2	0.79%
Pedestrian	6	1.13%	2	0.79%
Bike	6	1.13%	0	0.00%
Rear-end	198	37.36%	67	26.48%
Single Vehicle	11	2.08%	6	2.37%
Sideswipe Opposite	12	2.26%	4	1.58%
Sideswipe Same	58	10.94%	68	26.88%
Other	96	18.11%	58	22.92%
Total	530	100.00%	253	100.00%


Roundabout Crash Type

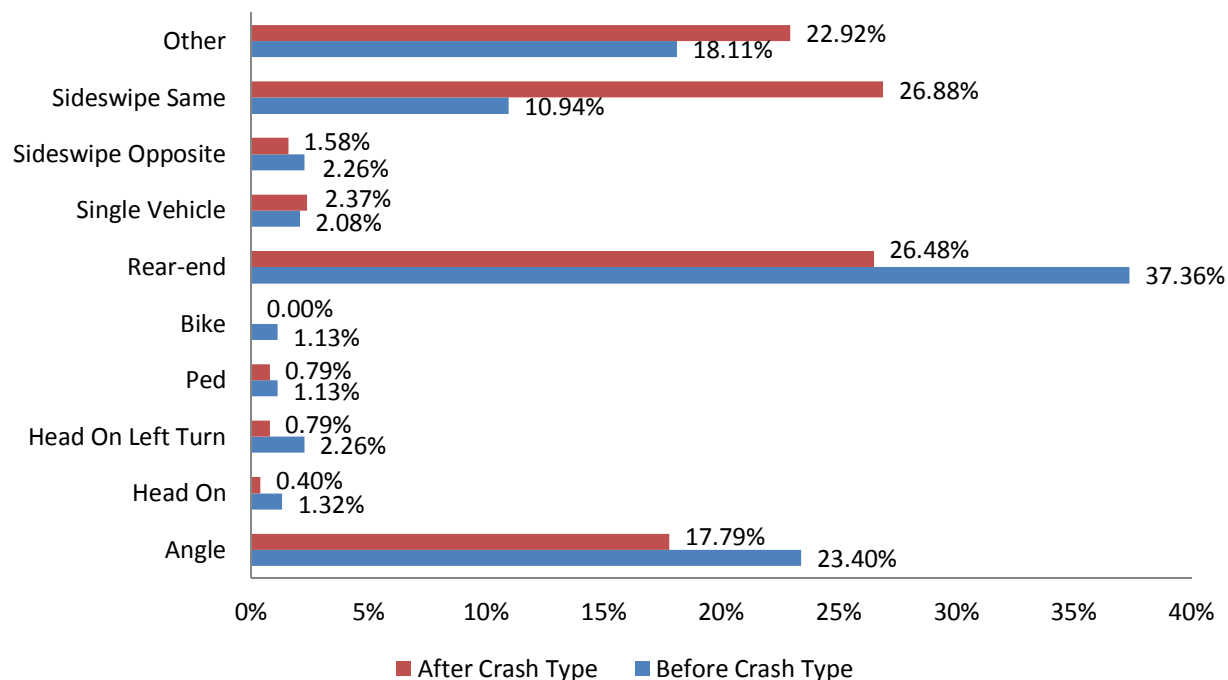


The results of the analysis show that the percent of crashes that occurred during the daytime remained almost the same in the “before” and “after” conditions (71.70% “before” versus 73.12% “after”). A larger percent of crashes occurred during “dark, lighted” conditions in the “after” period (16.21%) than in the “before” period (12.45%). Despite the lighting requirements at roundabout intersections, almost the same percent of crashes occur during the nighttime conditions in the “before” condition as they do in the “after” condition (28.30% “before” versus 26.88% “after”).

Lighting	“Before”		“After”	
Daylight	380	71.70%	185	73.12%
Dawn	10	1.89%	5	1.98%
Dusk	16	3.02%	6	2.37%
Dark, Lighted	66	12.45%	41	16.21%
Dark, Unlighted	55	10.38%	15	5.93%
Other	3	0.57%	1	0.40%
Total	530	100.00%	253	100.00%

Before Lighting

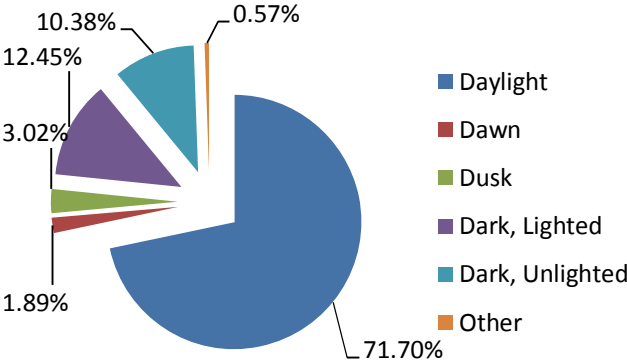


After Lighting

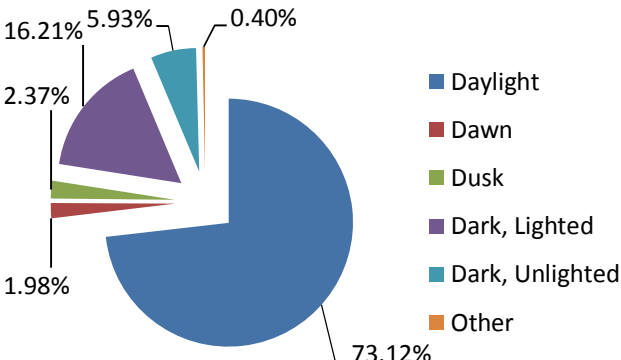

Triple Lane Roundabouts

In the “before” period, 19.92% of the crashes resulted in an injury or a fatality. In the “after” period only 5.64% of the crashes resulted in an injury or a fatality. There were no observed fatalities in either the “before” or “after” time periods.


Severity Type	“Before” Severity		“After” Severity	
Fatal	0	0.00%	0	0.00%
A-Level	12	1.51%	3	0.39%
B-Level	23	2.90%	8	1.05%
C-Level	123	15.51%	32	4.20%
PDO	635	80.08%	719	94.36%
Total	793	100.00%	762	100.00%

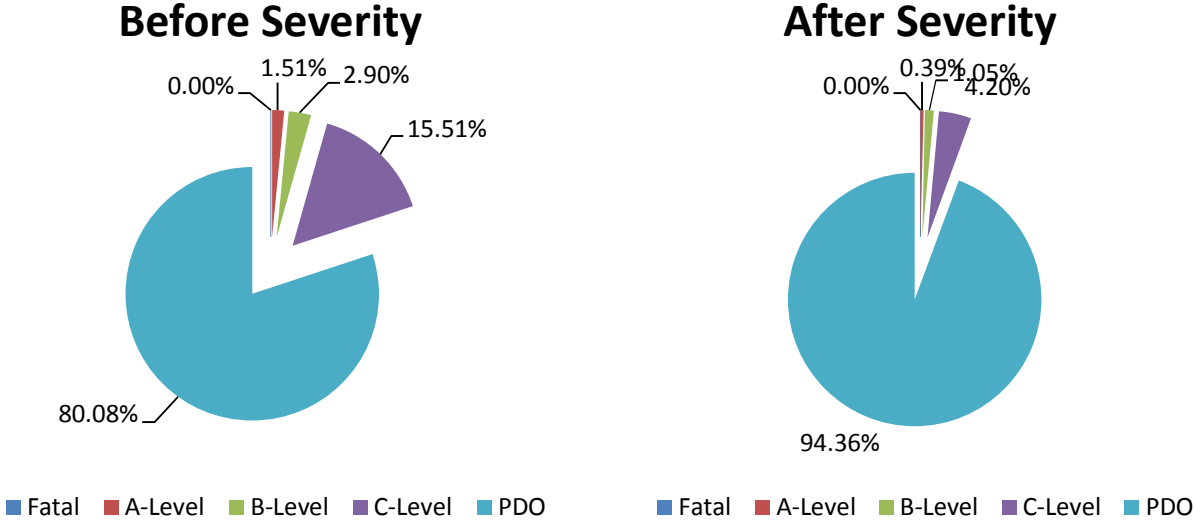

The largest change in the crash types came from the rear-end crash types. 52.08% of the crashes in the “before” period were rear-end type crashes and 22.18% of the crashes in the “after” period were rear-end type crashes. It is also important to note that the Sideswipe Same crashes increased from only 5.42% in the “before” period to 44.36% in the “after” period.

Crash Type	“Before” Type		“After” Type	
	Count	Percentage	Count	Percentage
Angle	174	21.94%	177	23.23%
Head On	10	1.26%	7	0.92%
Head On Left turn	37	4.67%	0	0.00%
Pedestrian	0	0.00%	0	0.00%
Bike	1	0.13%	1	0.13%
Rear-end	413	52.08%	169	22.18%
Single Vehicle	3	0.38%	0	0.00%
Sideswipe Opposite	18	2.27%	24	3.15%
Sideswipe Same	43	5.42%	338	44.36%
Other	94	11.85%	46	6.04%
Total	793	100.00%	762	100.00%


Roundabout Crash Type

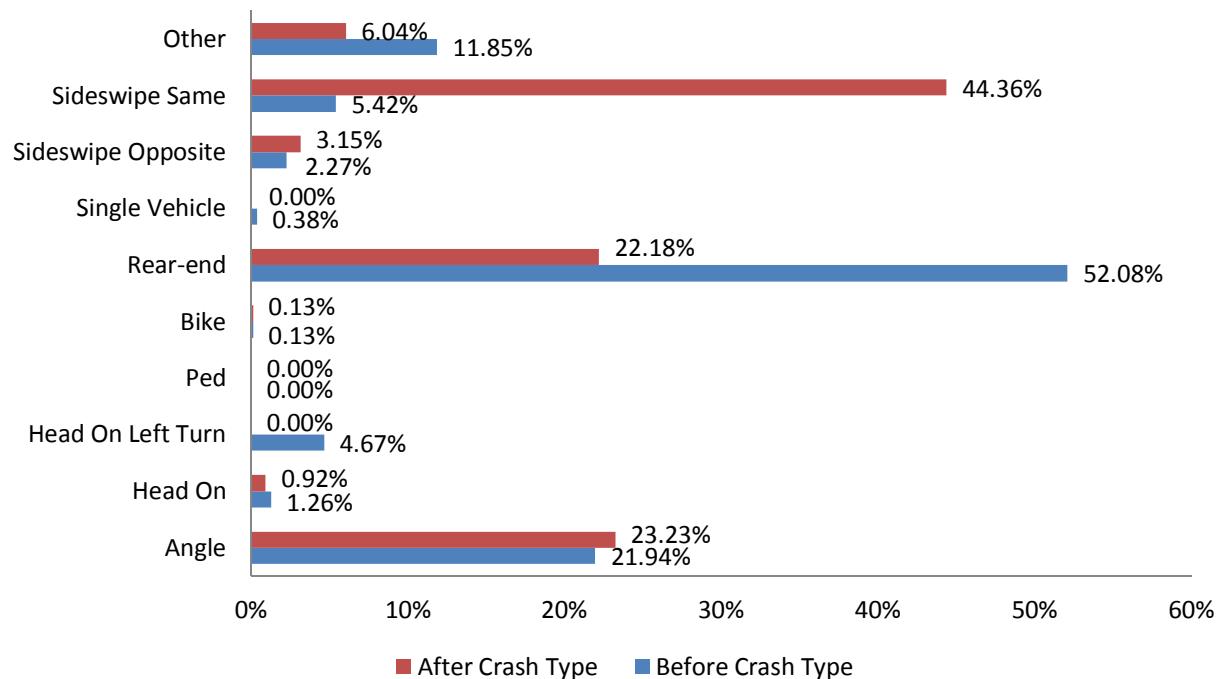


The results of the analysis show that the percent of crashes that occurred during the daytime remained almost the same in the “before” and “after” conditions (78.81% “before” versus 81.76% “after”). A larger percent of crashes occurred during “dark, lighted” conditions in the “after” period (11.15%) than in the “before” period (6.31%). Despite the lighting requirements at roundabout intersections, almost the same percent of crashes occur during the nighttime conditions in the “before” condition as they do in the “after” condition (21.19% “before” versus 18.24% “after”).

Lighting	“Before”		“After”	
Daylight	625	78.81%	623	81.76%
Dawn	20	2.52%	11	1.44%
Dusk	20	2.52%	15	1.97%
Dark, Lighted	50	6.31%	85	11.15%
Dark, Unlighted	66	8.32%	24	3.15%
Other	12	1.51%	4	0.52%
Total	793	100.00%	762	100.00%

Before Lighting

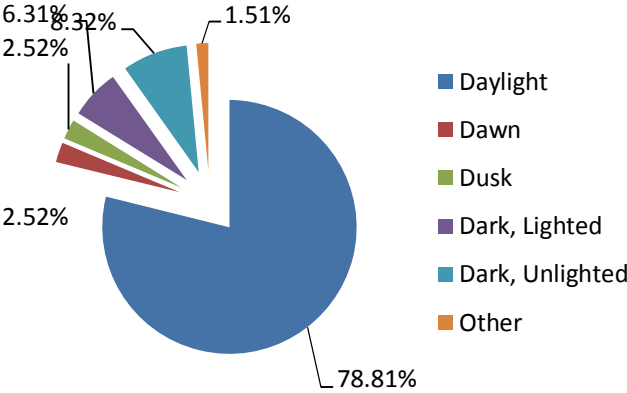



After Lighting

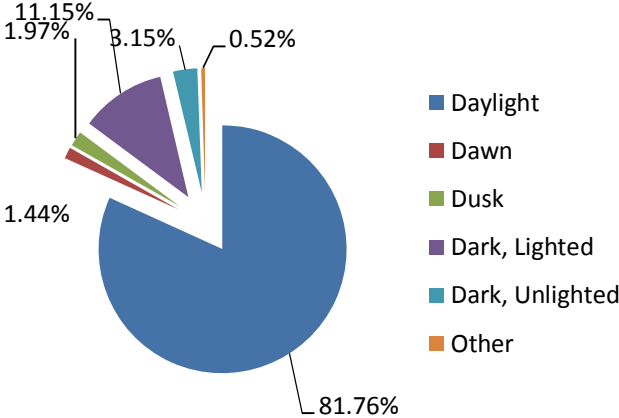

Signalized Intersections Conversion to Roundabouts

In the “before” period, 22.26% of the crashes resulted in an injury or a fatality. In the “after” period only 7.83% of the crashes resulted in an injury or a fatality. There were also two fatalities (0.38%) observed in the “before” period and in the “after” period there were no observed fatal crashes.


Severity Type	“Before” Severity		“After” Severity	
Fatal	2	0.38%	0	0.00%
A-Level	9	1.73%	2	1.74%
B-Level	26	4.99%	4	3.48%
C-Level	79	15.16%	3	2.61%
PDO	405	77.74%	106	92.17%
Total	521	100.00%	115	100.00%

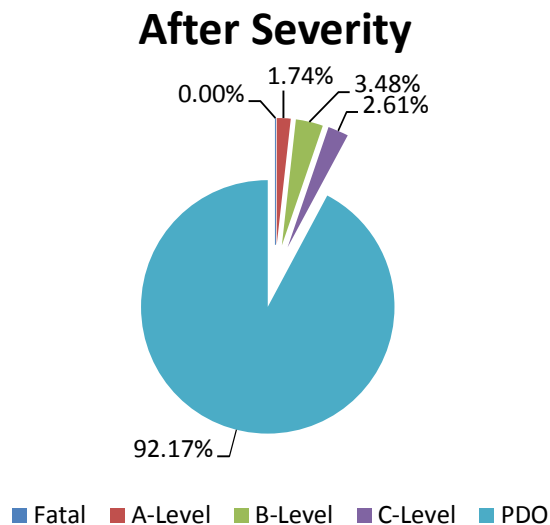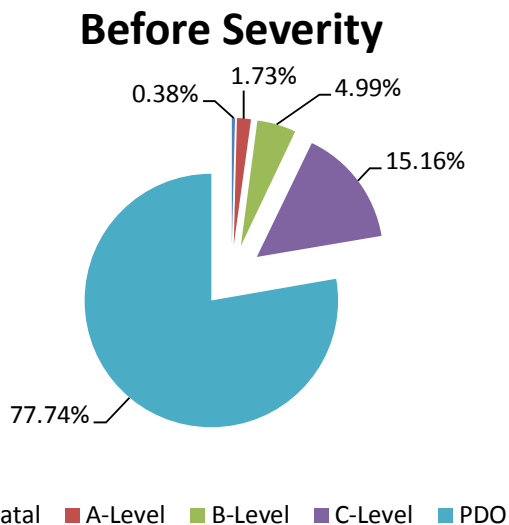

The largest change in the crash types came from the crash types that often result in the greatest severity of crashes (angle, head-on, head-on left turn, pedestrian, and bike). Most notably, the percent of angle crashes was reduced by 7.95%. This number may also be greater than 7.95%, because a common error in recording crash types is mistaking sideswipe crashes as angle crashes especially since an angle crash cannot occur in a roundabout.


Crash Type	"Before" Type		"After" Type	
Angle	132	25.34%	20	17.39%
Head On	2	0.38%	1	0.87%
Head On Left turn	29	5.57%	2	1.74%
Pedestrian	8	1.54%	2	1.74%
Bike	7	1.34%	1	0.87%
Rear-end	186	35.70%	38	33.04%
Single Vehicle	9	1.73%	2	1.74%
Sideswipe Opposite	9	1.73%	1	0.87%
Sideswipe Same	70	13.44%	22	19.13%
Other	69	13.24%	26	22.61%
Total	521	100.00%	115	100.00%

Roundabout Crash Type

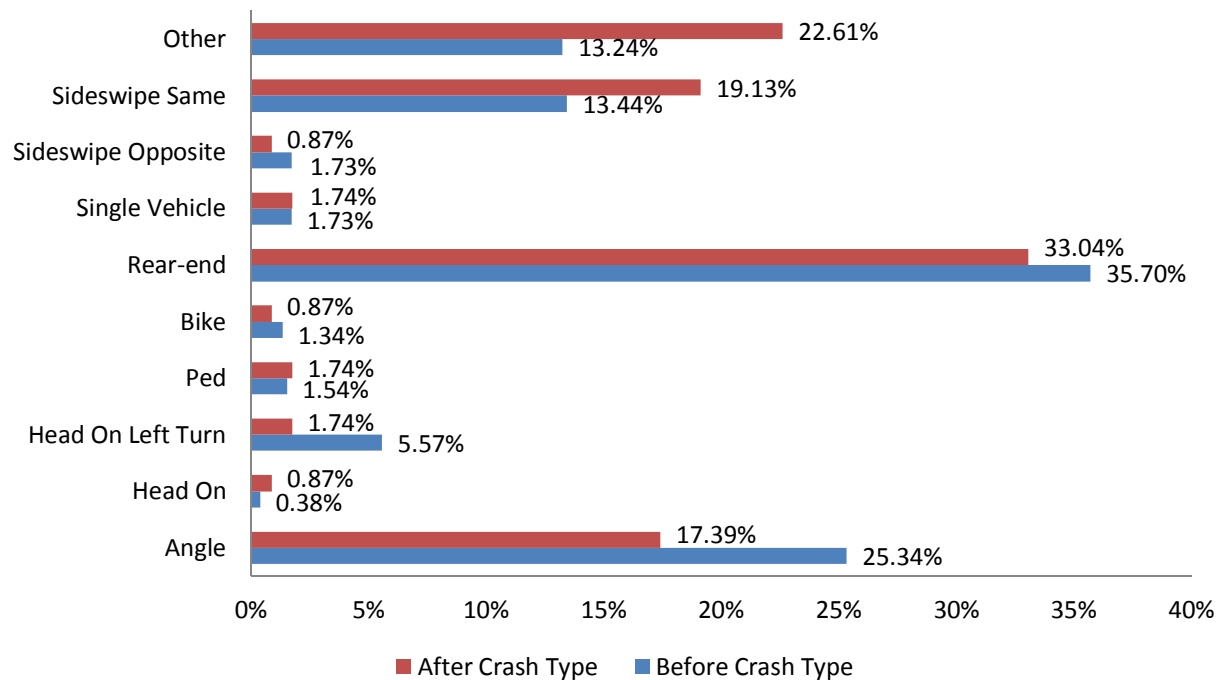

The results of the analysis show that the percent of crashes that occurred during the daytime remained almost the same in the “before” and “after” conditions (74.28% “before” versus 70.43% “after”). A larger percent of crashes occurred during “dark, lighted” conditions in the “after” period (15.65%) than in the “before” period (14.97%). Despite the lighting requirements at roundabout intersections, almost the same percent of crashes occur during the nighttime conditions in the “before” condition as they do in the “after” condition (25.72% “before” versus 29.57% “after”).

Lighting	“Before”		“After”	
Daylight	387	74.28%	81	70.43%
Dawn	13	2.50%	4	3.48%
Dusk	12	2.30%	1	0.87%
Dark, Lighted	78	14.97%	18	15.65%
Dark, Unlighted	24	4.61%	10	8.70%
Other	7	1.34%	1	0.87%
Total	521	100.00%	115	100.00%

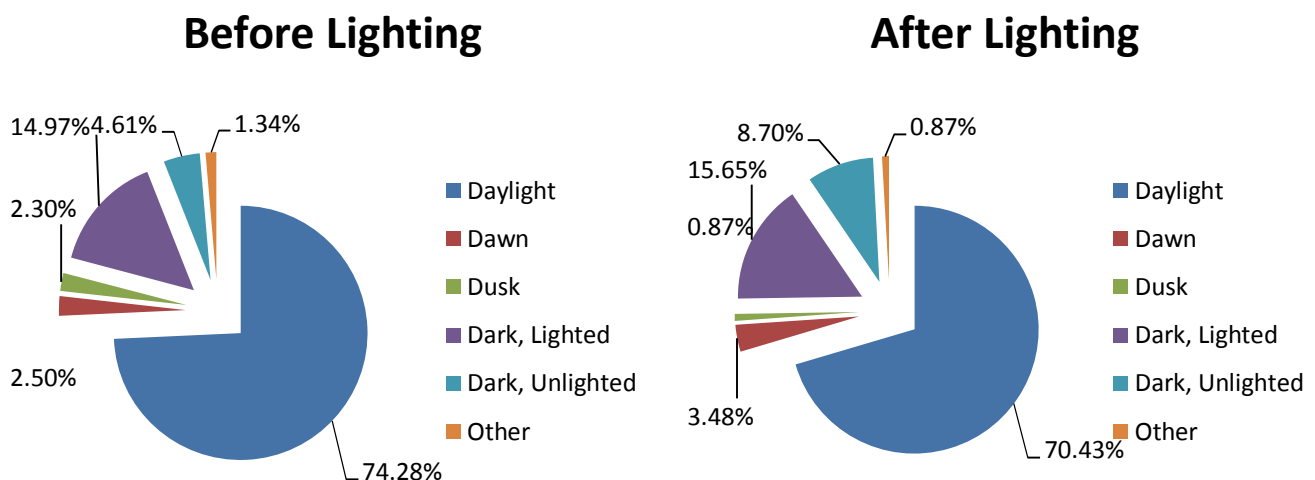


Stop Controlled Intersection Conversions to Roundabouts

In the “before” period, 21.69% of the crashes resulted in an injury or a fatality. In the “after” period only 11.22% of the crashes resulted in an injury or a fatality. There was also one fatality (0.22%) observed in the “before” period and in the “after” period there were no observed fatal crashes.


Severity Type	“Before” Severity		“After” Severity	
Fatal	1	0.22%	0	0.00%
A-Level	8	1.74%	3	1.02%
B-Level	30	6.51%	7	2.38%
C-Level	61	13.23%	23	7.82%
PDO	361	78.31%	261	88.78%
Total	461	100.00%	294	100.00%

Before Severity

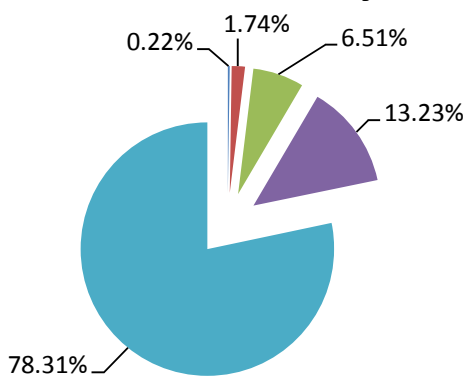

■ Fatal ■ A-Level ■ B-Level ■ C-Level ■ PDO

After Severity

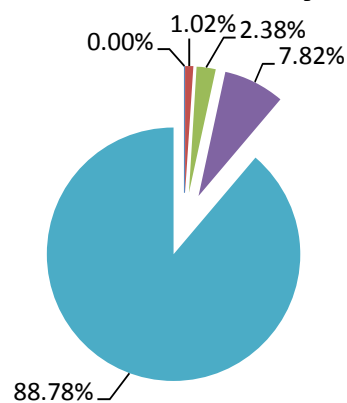


■ Fatal ■ A-Level ■ B-Level ■ C-Level ■ PDO

The largest change in the crash types came from the crash types that often result in the greatest severity of crashes (angle, head-on, head-on left turn, pedestrian, and bike). Most notably, the percent of angle crashes was reduced by 14.47%. This number may also be greater than 14.47%, because a common error in recording crash types is mistaking sideswipe crashes as angle crashes especially since an angle crash cannot occur in a roundabout.

Crash Type	"Before" Type		"After" Type	
	Count	Percentage	Count	Percentage
Angle	131	28.42%	41	13.95%
Head On	7	1.52%	1	0.34%
Head On Left turn	10	2.17%	2	0.68%
Pedestrian	4	0.87%	2	0.68%
Bike	5	1.08%	0	0.00%
Rear-end	153	33.19%	98	33.33%
Single Vehicle	11	2.39%	6	2.04%
Sideswipe Opposite	13	2.82%	5	1.70%
Sideswipe Same	23	4.99%	55	18.71%
Other	104	22.56%	84	28.57%
Total	461	100.00%	294	100.00%


Roundabout Crash Type

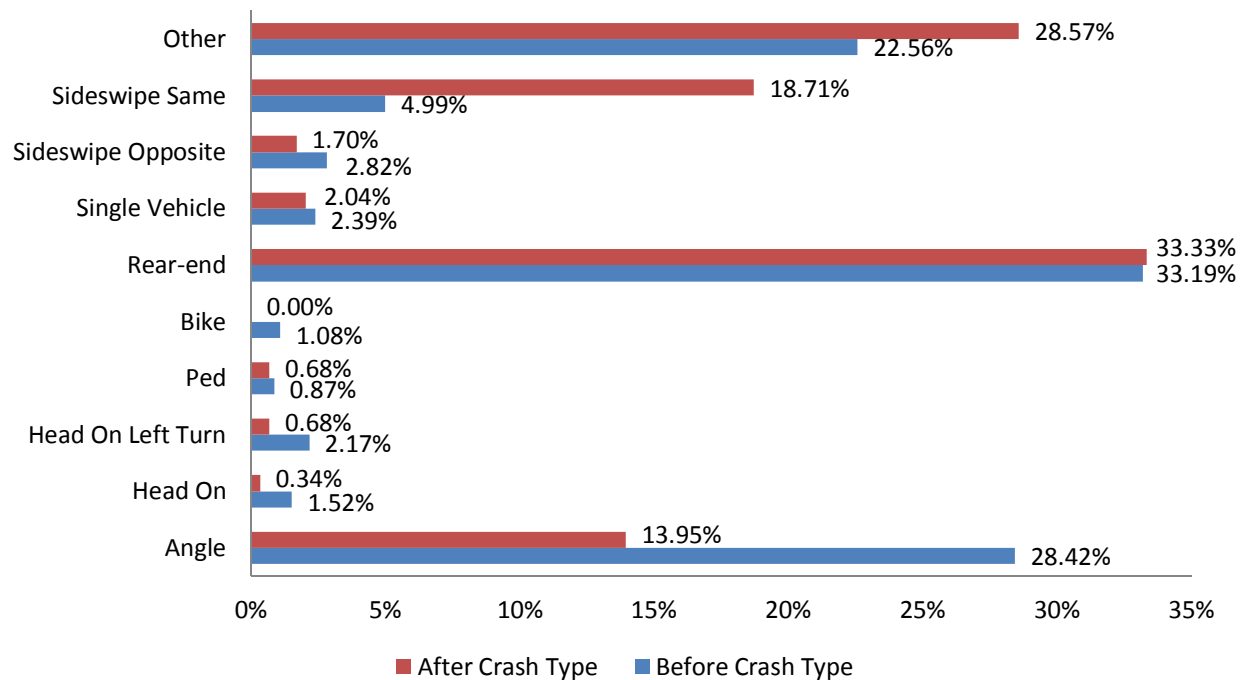


The results of the analysis show that the percent of crashes that occurred during the daytime remained almost the same in the “before” and “after” conditions (72.23% “before” versus 70.41% “after”). A larger percent of crashes occurred during “dark, lighted” conditions in the “after” period (18.37%) than in the “before” period (8.46%). Despite the lighting requirements at roundabout intersections, almost the same percent of crashes occur during the nighttime conditions in the “before” condition as they do in the “after” condition (27.77% “before” versus 29.59% “after”).

Lighting	“Before”		“After”	
Daylight	333	72.23%	207	70.41%
Dawn	11	2.39%	7	2.38%
Dusk	14	3.04%	5	1.70%
Dark, Lighted	39	8.46%	54	18.37%
Dark, Unlighted	58	12.58%	21	7.14%
Other	6	1.30%	0	0.00%
Total	461	100.00%	294	100.00%

Before Lighting

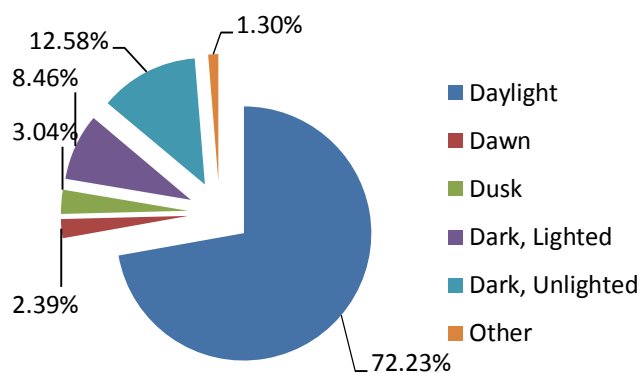

After Lighting

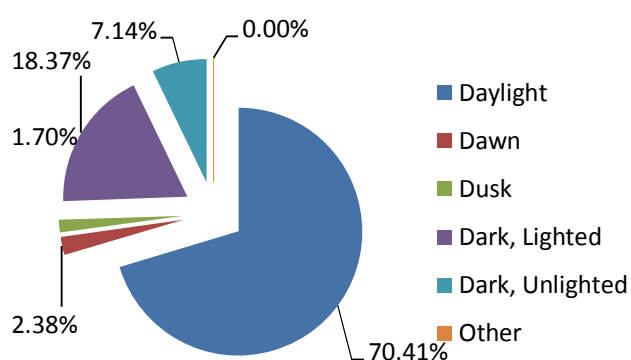


All Way Stop Controlled Intersection Conversions to Roundabouts

In the “before” period, 18.38% of the crashes resulted in an injury or a fatality. In the “after” period only 9.43% of the crashes resulted in an injury or a fatality. There were also two fatalities (1.08%) observed in the “before” period and in the “after” period there were no observed fatal crashes.


Severity Type	“Before” Severity		“After” Severity	
Fatal	2	1.08%	0	0.00%
A-Level	3	1.62%	0	0.00%
B-Level	9	4.86%	1	1.89%
C-Level	20	10.81%	4	7.55%
PDO	151	81.62%	48	90.57%
Total	185	100.00%	53	100.00%

Before Severity

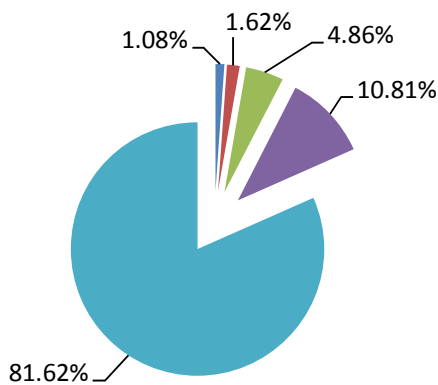

■ Fatal ■ A-Level ■ B-Level ■ C-Level ■ PDO

After Severity

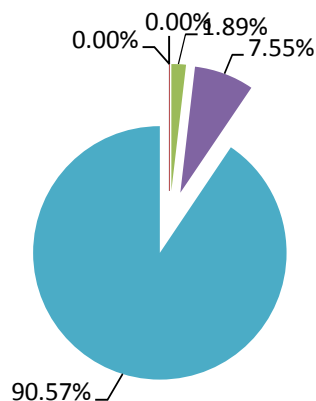


■ Fatal ■ A-Level ■ B-Level ■ C-Level ■ PDO

The largest change in the crash types came from the rear-end crash types. 20.54% of the crashes in the “before” period were rear-end type crashes and 9.43% of the crashes in the “after” period were rear-end type crashes. It is also important to note that the Sideswipe Same crashes increased from 7.57% in the “before” period to 28.30% in the “after” period.

Crash Type	“Before” Type		“After” Type	
	Count	Percentage	Count	Percentage
Angle	58	31.35%	18	33.96%
Head On	0	0.00%	0	0.00%
Head On Left turn	7	3.78%	0	0.00%
Pedestrian	4	2.16%	0	0.00%
Bike	1	0.54%	1	1.89%
Rear-end	38	20.54%	5	9.43%
Single Vehicle	4	2.16%	0	0.00%
Sideswipe Opposite	4	2.16%	2	3.77%
Sideswipe Same	14	7.57%	15	28.30%
Other	55	29.73%	12	22.64%
Total	185	100.00%	53	100.00%


Roundabout Crash Type

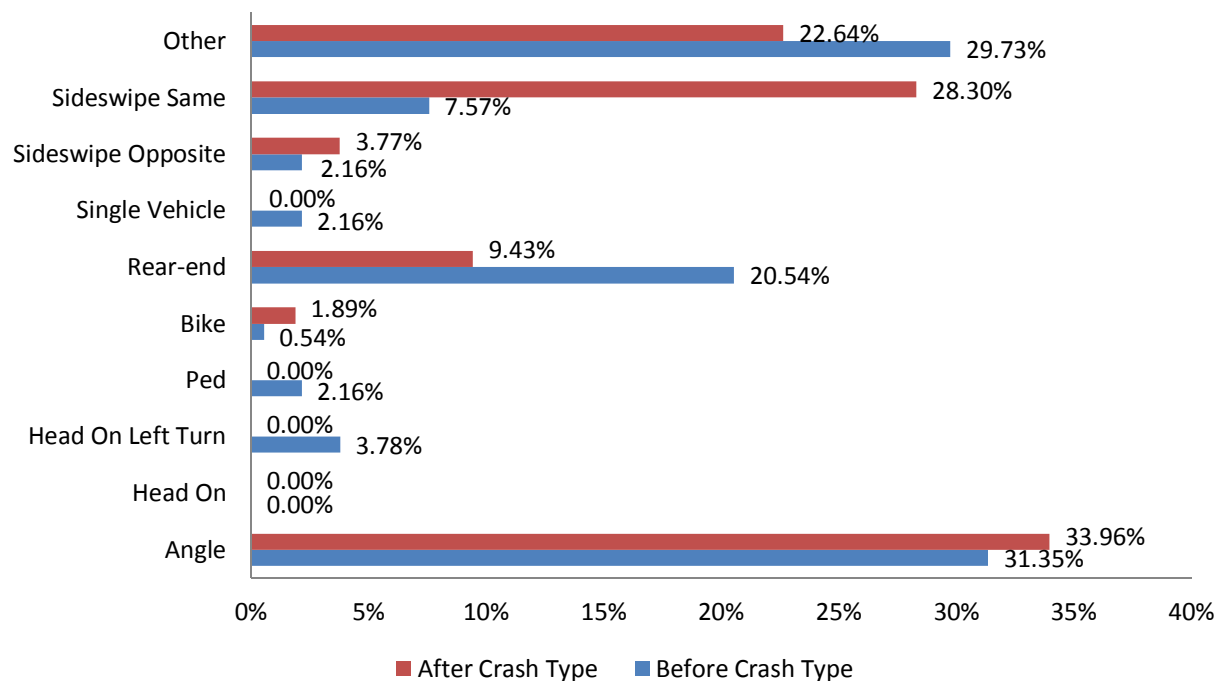


The results of the analysis show that the percent of crashes that occurred during the increased from 75.14% in the “before” period to 84.91% in the “after period.

Lighting	“Before”		“After”	
	Count	Percentage	Count	Percentage
Daylight	139	75.14%	45	84.91%
Dawn	3	1.62%	0	0.00%
Dusk	4	2.16%	1	1.89%
Dark, Lighted	23	12.43%	4	7.55%
Dark, Unlighted	14	7.57%	3	5.66%
Other	2	1.08%	0	0.00%
Total	185	100.00%	53	100.00%

Before Lighting

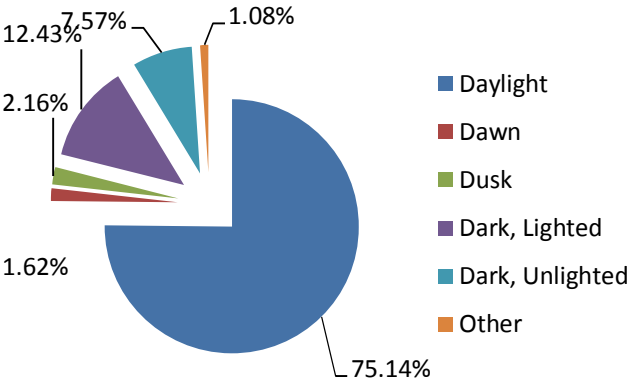


After Lighting

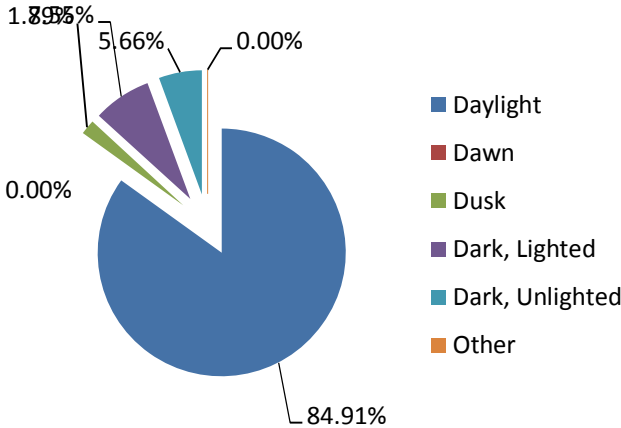

Interchange Roundabout

In the “before” period, 25.25% of the crashes resulted in an injury or a fatality. In the “after” period only 8.89% of the crashes resulted in an injury or a fatality. There was also one fatality (0.50%) observed in the “before” period and in the “after” period there were no observed fatal crashes.


Severity Type	“Before” Severity		“After” Severity	
Fatal	1	0.50%	0	0.00%
A-Level	2	0.99%	0	0.00%
B-Level	13	6.44%	0	0.00%
C-Level	35	17.33%	4	8.89%
PDO	151	74.75%	41	91.11%
Total	202	100.00%	45	100.00%

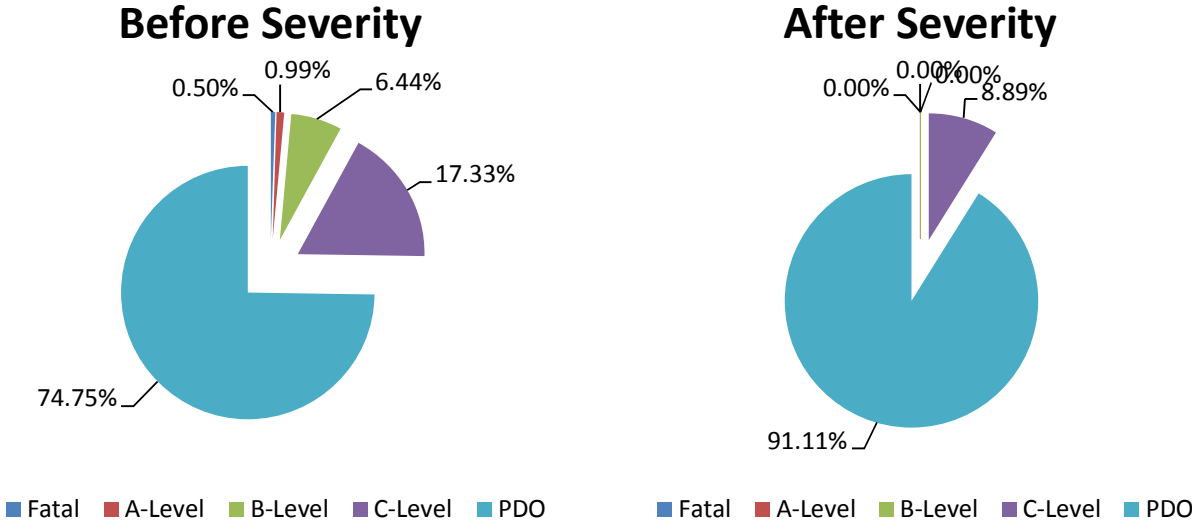

The largest change in the crash types came from the crash types that often result in the greatest severity of crashes (angle, head-on, head-on left turn, pedestrian, and bike). Most notably, the percent of angle crashes was reduced by 6.48%. This number may also be greater than 6.48%, because a common error in recording crash types is mistaking sideswipe crashes as angle crashes especially since an angle crash cannot occur in a roundabout.


Crash Type	"Before" Type		"After" Type	
Angle	49	24.26%	8	17.78%
Head On	3	1.49%	0	0.00%
Head On Left turn	1	0.50%	0	0.00%
Pedestrian	1	0.50%	0	0.00%
Bike	3	1.49%	0	0.00%
Rear-end	92	45.54%	12	26.67%
Single Vehicle	3	1.49%	0	0.00%
Sideswipe Opposite	5	2.48%	0	0.00%
Sideswipe Same	14	6.93%	11	24.44%
Other	31	15.35%	14	31.11%
Total	202	100.00%	45	100.00%

Roundabout Crash Type

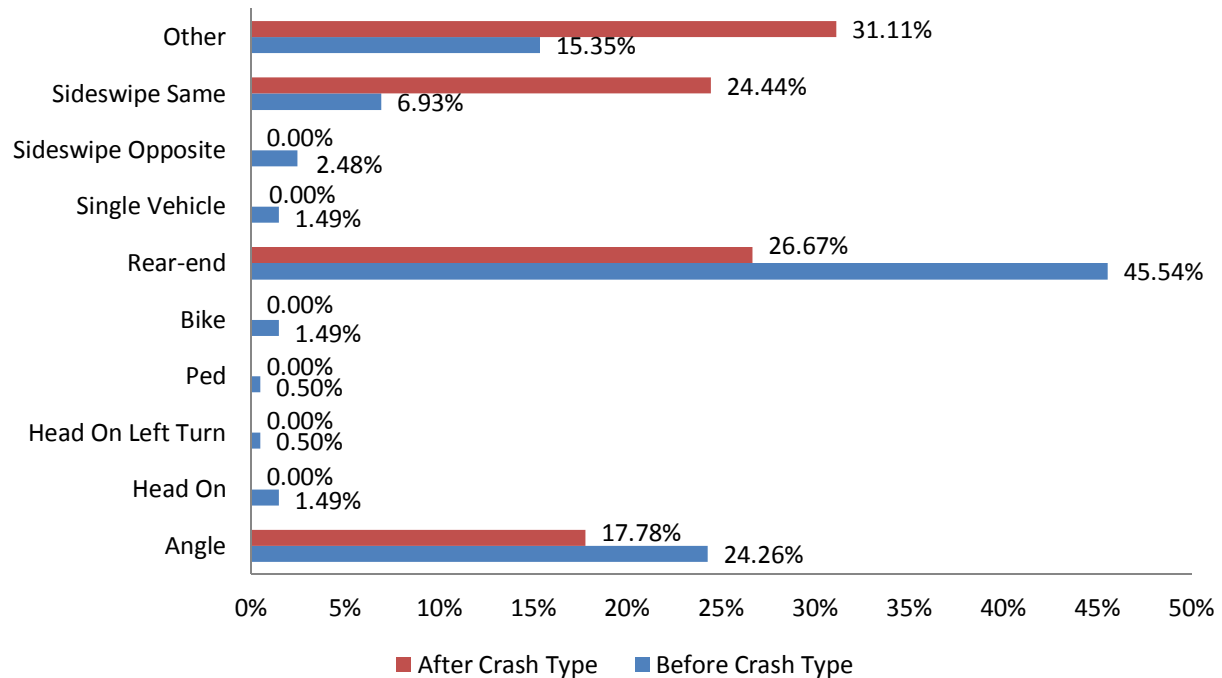

The results of the analysis show that the percent of crashes that occurred during the daytime remained almost the same in the “before” and “after” conditions (74.75% “before” versus 80.00% “after”). A larger percent of crashes occurred during “dark, lighted” conditions in the “after” period (13.33%) than in the “before” period (5.94%). Despite the lighting requirements at roundabout intersections, almost the same percent of crashes occur during the nighttime conditions in the “before” condition as they do in the “after” condition (25.25% “before” versus 20.00% “after”).

Lighting	“Before”		“After”	
	Count	Percentage	Count	Percentage
Daylight	151	74.75%	36	80.00%
Dawn	7	3.47%	1	2.22%
Dusk	7	3.47%	1	2.22%
Dark, Lighted	12	5.94%	6	13.33%
Dark, Unlighted	24	11.88%	1	2.22%
Other	1	0.50%	0	0.00%
Total	202	100.00%	45	100.00%

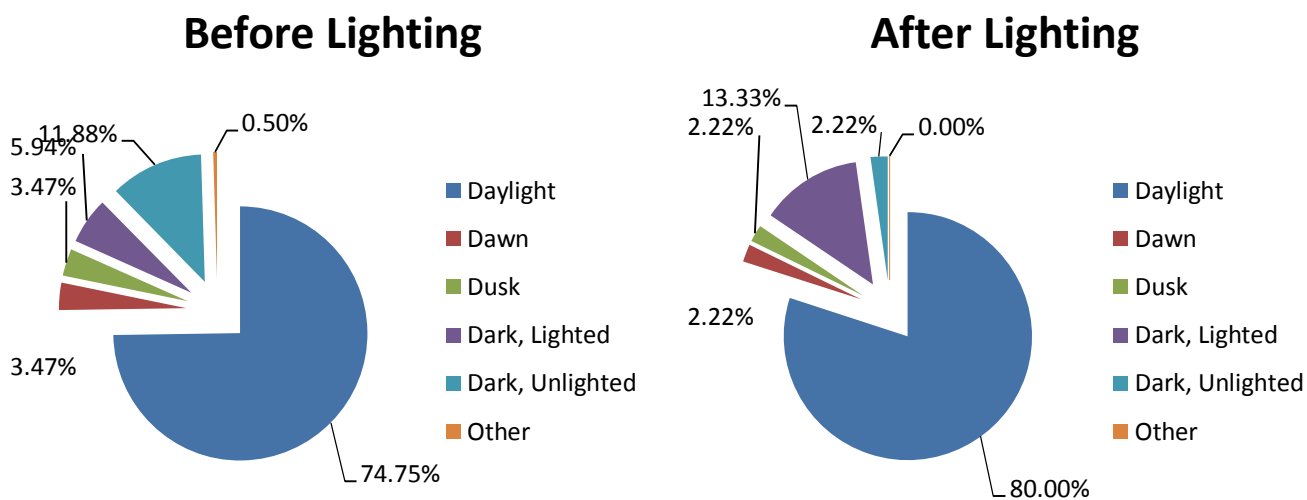

APPENDIX D: BENEFIT/COST ANALYSIS

SINGLE LANE ROUNDABOUTS

Intersection	Roundabout Type	Delta PDO/year	Delta injury/year	Point Estimate \$ benefit			Construction Cost	Delay Benefit	Time of Return (years)
				PDO/year	Injury/year	ALL/year			
I-94 Business (Main St) & Riverview Dr	single lane	3.013	1.186	\$24,704	\$127,784	\$152,488	\$464,137	\$510,318	0.70
I-94 Business (Main St) & 5th St	single lane	1.451	0.536	\$11,897	\$57,751	\$69,649	\$464,137	\$510,318	0.80
US-127 BR & Mission St	single lane	0.239	0.382	\$1,959	\$41,202	\$43,162	\$464,137	\$510,318	0.84
Willow Hwy & Canal Rd	single lane	-0.885	-0.118	-\$7,259	-\$12,770	-\$20,029	\$464,137	\$510,318	0.95
Bennett Rd & Hulett Rd	single lane	0.080	1.822	\$659	\$196,429	\$197,088	\$339,844	\$510,318	0.48
Michigan Ave & Washington Square	single lane	1.231	0.026	\$10,092	\$2,794	\$12,886	\$464,137	\$510,318	0.89
Mosher St & Main St	single lane	0.092	0.344	\$753	\$37,128	\$37,881	\$464,137	\$510,318	0.85
Cherry St & Jefferson Ave	single lane	0.930	0.969	\$7,627	\$104,432	\$112,059	\$464,137	\$510,318	0.75
Wealthy St & Lafayette Ave	single lane	3.038	0.162	\$24,914	\$17,454	\$42,368	\$464,137	\$510,318	0.84
Wealthy St & Jefferson Ave	single lane	3.651	2.596	\$29,939	\$279,835	\$309,776	\$464,137	\$510,318	0.57
7 Mile Rd & Brewer Ave	single lane	0.230	0.534	\$1,889	\$57,580	\$59,469	\$464,137	\$510,318	0.81
Hamburg Rd & Winans Lake Rd	single lane	1.464	0.695	\$12,006	\$74,954	\$86,959	\$524,136	\$510,318	0.88
Main St & 3rd St	single lane	-0.597	0.624	-\$4,896	\$67,299	\$62,403	\$464,137	\$510,318	0.81
Hayes Rd & 25 Mile Rd	single lane	-2.992	0.939	-\$24,532	\$101,160	\$76,629	\$528,430	\$510,318	0.90
M-46/Apple Ave & M-37/Newaygo Rd	single lane	1.657	1.228	\$13,588	\$132,371	\$145,960	\$464,137	\$510,318	0.71
3rd St & Western Ave	single lane	-0.723	0.016	-\$5,929	\$1,763	-\$4,166	\$464,137	\$510,318	0.92
Cooley Lake Rd & Bogie Lake Rd	single lane	-1.505	1.880	-\$12,344	\$202,650	\$190,306	\$464,137	\$510,318	0.66
Cooley Lake Rd & Oxbow Lake Rd	single lane	-1.801	-0.035	-\$14,770	-\$3,764	-\$18,534	\$464,137	\$510,318	0.94
Old US-27/North Hwy & Livingston Blvd	single lane	-0.237	-0.069	-\$1,945	-\$7,451	-\$9,397	\$464,137	\$510,318	0.93
Nixon Rd & Huron Pkwy	single lane	1.061	0.582	\$8,698	\$62,716	\$71,414	\$464,137	\$510,318	0.80
Average		0.470	0.715	\$3,852	\$77,066	\$80,919			
TOTAL		9.396	14.300	\$77,049	\$1,541,317	\$1,618,372			

DOUBLE LANE ROUNDABOUTS

Intersection	Roundabout Type	Delta PDO/year	Delta injury/year	Point Estimate \$ benefit			Construction Cost	Delay Benefit	Time of Return (years)
				PDO/year	Injury/year	ALL/year			
Lake Lansing Rd & Chamberlain Dr	double lane	-2.689	-0.615	-\$22,047	-\$66,322	-\$88,369	\$750,000	\$1,668,896	0.47
Wood St & Sam's Way	double lane	-2.455	-0.658	-\$20,134	-\$70,910	-\$91,044	\$750,000	\$1,668,896	0.48
Cedar St & Holbrook Dr	double lane	-1.162	-0.719	-\$9,532	-\$77,503	-\$87,035	\$750,000	\$1,668,896	0.47
Michigan Ave & Rankin St	double lane	2.767	0.045	\$22,691	\$4,809	\$27,500	\$1,977,270	\$1,668,896	1.17
Romeo Plank Rd & 19 Mile Rd	double lane	-4.343	0.268	-\$35,609	\$28,882	-\$6,727	\$3,110,094	\$1,668,896	1.87
Romeo Plank Rd & Cass Ave	double lane	-9.082	0.252	-\$74,473	\$27,141	-\$47,332	\$3,110,094	\$1,668,896	1.92
Utica Rd & Dodge Park Rd	double lane	6.937	1.156	\$56,880	\$124,618	\$181,498	\$3,393,431	\$1,668,896	1.83
M-53 ramp & 26-Mile	double lane	4.188	1.977	\$34,345	\$213,073	\$247,419	\$1,977,270	\$1,668,896	1.03
M-53 ramp & 26-Mile	double lane	-1.646	0.466	-\$13,499	\$50,242	\$36,743	\$1,977,270	\$1,668,896	1.16
Baldwin Rd/Indianwood Rd & S. Coats Rd	double lane	-3.180	0.246	-\$26,080	\$26,503	\$423	\$1,977,270	\$1,668,896	1.18
68th Ave & Randall St/ State	double lane	-2.746	0.199	-\$22,521	\$21,416	-\$1,105	\$1,977,270	\$1,668,896	1.19
I-75 & M-81/Washington Road	double lane	0.890	0.156	\$7,299	\$16,762	\$24,061	\$1,977,270	\$1,668,896	1.17
I-75 & M-81/Washington Road	double lane	3.206	0.591	\$26,293	\$63,671	\$89,965	\$1,977,270	\$1,668,896	1.12
Geddes Rd & Superior Rd	double lane	-0.355	0.177	-\$2,911	\$19,118	\$16,207	\$1,977,270	\$1,668,896	1.17
Maple Rd & M-14	double lane	-4.858	0.441	-\$39,838	\$47,560	\$7,721	\$1,977,270	\$1,668,896	1.18
Maple Rd & M-14	double lane	-0.688	0.517	-\$5,641	\$55,695	\$50,055	\$1,977,270	\$1,668,896	1.15
Average		-0.951	0.281	-\$7,799	\$30,297	\$22,499			
TOTAL		-15.217	4.497	-\$124,777	\$484,755	\$359,980			

TRIPLE LANE ROUNDABOUTS

Intersection	Roundabout Type	Delta PDO/year	Delta injury/year	Point Estimate \$ benefit			Construction Cost	Delay Benefit	Time of Return (years)
				PDO/year	Injury/year	ALL/year			
Maple Rd & Drake Rd	Triple Lane	-39.692	-0.080	-\$325,474	-\$8,612	-\$334,086	\$1,777,546	\$2,331,446	0.89
Maple Rd & Farmington Rd	Triple Lane	-26.219	0.485	-\$214,998	\$52,274	-\$162,724	\$2,138,162	\$2,331,446	0.99
14 Mile Rd & Farmington Rd	Triple Lane	-28.162	3.335	-\$230,931	\$359,405	\$128,474	\$1,957,854	\$2,331,446	0.80
Average		-31.358	1.247	-\$257,134	\$134,356	-\$122,778			
TOTAL		-94.074	3.740	-\$771,403	\$403,067	-\$368,336			

ALL WAY STOP CONTROLLED INTERSECTION CONVERSIONS TO ROUNDABOUTS

Intersection	Before Control	Delta PDO/year	Delta injury/year	Point Estimate \$ benefit			Construction Cost	Delay Benefit	Time of Return (years)
				PDO/year	Injury/year	ALL/year			
Willow Hwy & Canal Rd	awsc	-0.885	-0.118	-\$7,259	-\$12,770	-\$20,029	\$464,137	\$510,318	0.95
Michigan Ave & Washington Square	awsc	1.231	0.026	\$10,092	\$2,794	\$12,886	\$464,137	\$510,318	0.89
M-46/Apple Ave & M-37/Newaygo Rd	awsc	1.657	1.228	\$13,588	\$132,371	\$145,960	\$464,137	\$510,318	0.71
68th Ave & Randall St/ State	awsc	-2.746	0.199	-\$22,521	\$21,416	-\$1,105	\$1,977,270	\$1,668,896	1.19
Nixon Rd & Huron Pkwy	awsc	1.061	0.582	\$8,698	\$62,716	\$71,414	\$464,137	\$510,318	0.80
Geddes Rd & Superior Rd	awsc	-0.355	0.177	-\$2,911	\$19,118	\$16,207	\$1,977,270	\$1,668,896	1.17
Average		-0.006	0.349	-\$52	\$37,608	\$37,555			
TOTAL		-0.038	2.093	-\$313	\$225,645	\$225,333			

SIGNALIZED INTERSECTION CONVERSIONS TO ROUNDABOUTS

Intersection	Before Control	Delta PDO/year	Delta injury/year	Point Estimate \$ benefit			Construction Cost	Delay Benefit	Time of Return (years)
				PDO/year	Injury/year	ALL/year			
I-94 Business (Main St) & Riverview Dr	Signalized	3.013	1.186	\$24,704	\$127,784	\$152,488	\$464,137	\$510,318	0.70
Mosher St & Main St	Signalized	0.092	0.344	\$753	\$37,128	\$37,881	\$464,137	\$510,318	0.85
Cherry St & Jefferson Ave	Signalized	0.930	0.969	\$7,627	\$104,432	\$112,059	\$464,137	\$510,318	0.75
Wealthy St & Lafayette Ave	Signalized	3.038	0.162	\$24,914	\$17,454	\$42,368	\$464,137	\$510,318	0.84
Wealthy St & Jefferson Ave	Signalized	3.651	2.596	\$29,939	\$279,835	\$309,776	\$464,137	\$510,318	0.57
Romeo Plank Rd & 19 Mile Rd	Signalized	-4.343	0.268	-\$35,609	\$28,882	-\$6,727	\$3,110,094	\$1,668,896	1.87
Romeo Plank Rd & Cass Ave	Signalized	-9.082	0.252	-\$74,473	\$27,141	-\$47,332	\$3,110,094	\$1,668,896	1.92
Utica Rd & Dodge Park Rd	Signalized	6.937	1.156	\$56,880	\$124,618	\$181,498	\$3,393,431	\$1,668,896	1.83
Cooley Lake Rd & Bogie Lake Rd	Signalized	-1.505	1.880	-\$12,344	\$202,650	\$190,306	\$464,137	\$510,318	0.66
I-75 & M-81/Washington Road	Signalized	0.890	0.156	\$7,299	\$16,762	\$24,061	\$1,977,270	\$1,668,896	1.17
I-75 & M-81/Washington Road	Signalized	3.206	0.591	\$26,293	\$63,671	\$89,965	\$1,977,270	\$1,668,896	1.12
Average		0.621	0.869	\$5,089	\$93,669	\$98,759			
TOTAL		6.827	9.559	\$55,983	\$1,030,357	\$1,086,344			

STOP CONTROLLED INTERSECTION CONVERSIONS TO ROUNDABOUTS

Intersection	Before Control	Delta PDO/year	Delta injury/year	Point Estimate \$ benefit			Construction Cost	Delay Benefit	Time of Return (years)
				PDO/year	Injury/year	ALL/year			
I-94 Business (Main St) & 5th St	Stop Controlled	1.451	0.536	\$11,897	\$57,751	\$69,649	\$464,137	\$510,318	0.80
US-127 BR & Mission St	Stop Controlled	0.239	0.382	\$1,959	\$41,202	\$43,162	\$464,137	\$510,318	0.84
Bennett Rd & Hulett Rd	Stop Controlled	0.080	1.822	\$659	\$196,429	\$197,088	\$339,844	\$510,318	0.48
Lake Lansing Rd & Chamberlain Dr	Stop Controlled	-2.689	-0.615	-\$22,047	-\$66,322	-\$88,369	\$750,000	\$1,668,896	0.47
Wood St & Sam's Way	Stop Controlled	-2.455	-0.658	-\$20,134	-\$70,910	-\$91,044	\$750,000	\$1,668,896	0.48
Cedar St & Holbrook Dr	Stop Controlled	-1.162	-0.719	-\$9,532	-\$77,503	-\$87,035	\$750,000	\$1,668,896	0.47
Michigan Ave & Rankin St	Stop Controlled	2.767	0.045	\$22,691	\$4,809	\$27,500	\$1,977,270	\$1,668,896	1.17
7 Mile Rd & Brewer Ave	Stop Controlled	0.230	0.534	\$1,889	\$57,580	\$59,469	\$464,137	\$510,318	0.81
Hamburg Rd & Winans Lake Rd	Stop Controlled	1.464	0.695	\$12,006	\$74,954	\$86,959	\$524,136	\$510,318	0.88
Main St & 3rd St	Stop Controlled	-0.597	0.624	-\$4,896	\$67,299	\$62,403	\$464,137	\$510,318	0.81
Hayes Rd & 25 Mile Rd	Stop Controlled	-2.992	0.939	-\$24,532	\$101,160	\$76,629	\$528,430	\$510,318	0.90
M-53 ramp & 26-Mile	Stop Controlled	4.188	1.977	\$34,345	\$213,073	\$247,419	\$1,977,270	\$1,668,896	1.03
M-53 ramp & 26-Mile	Stop Controlled	-1.646	0.466	-\$13,499	\$50,242	\$36,743	\$1,977,270	\$1,668,896	1.16
3rd St & Western Ave	Stop Controlled	-0.723	0.016	-\$5,929	\$1,763	-\$4,166	\$464,137	\$510,318	0.92
Cooley Lake Rd & Oxbow Lake Rd	Stop Controlled	-1.801	-0.035	-\$14,770	-\$3,764	-\$18,534	\$464,137	\$510,318	0.94
Baldwin Rd/Indianwood Rd & S. Coats Rd	Stop Controlled	-3.180	0.246	-\$26,080	\$26,503	\$423	\$1,977,270	\$1,668,896	1.18
Old US-27/North Hwy & Livingston Blvd	Stop Controlled	-0.237	-0.069	-\$1,945	-\$7,451	-\$9,397	\$464,137	\$510,318	0.93
Maple Rd & M-14	Stop Controlled	-4.858	0.441	-\$39,838	\$47,560	\$7,721	\$1,977,270	\$1,668,896	1.18
Maple Rd & M-14	Stop Controlled	-0.688	0.517	-\$5,641	\$55,695	\$50,055	\$1,977,270	\$1,668,896	1.15
Average		-0.664	0.376	-\$5,442	\$40,530	\$35,088			
TOTAL		-12.609	7.145	-\$103,397	\$770,070	\$666,676			

RURAL ROUNDABOUTS

Intersection	Environment	Delta PDO/year	Delta injury/year	Point Estimate \$ benefit			Construction Cost	Delay Benefit	Time of Return (years)
				PDO/year	Injury/year	ALL/year			
US-127 BR & Mission St	Rural	0.239	0.382	\$1,959	\$41,202	\$43,162	\$464,137	\$510,318	0.84
Willow Hwy & Canal Rd	Rural	-0.885	-0.118	-\$7,259	-\$12,770	-\$20,029	\$464,137	\$510,318	0.95
Bennett Rd & Hulett Rd	Rural	0.080	1.822	\$659	\$196,429	\$197,088	\$339,844	\$510,318	0.48
Cedar St & Holbrook Dr	Rural	-1.162	-0.719	-\$9,532	-\$77,503	-\$87,035	\$750,000	\$1,668,896	0.47
7 Mile Rd & Brewer Ave	Rural	0.230	0.534	\$1,889	\$57,580	\$59,469	\$464,137	\$510,318	0.81
Hamburg Rd & Winans Lake Rd	Rural	1.464	0.695	\$12,006	\$74,954	\$86,959	\$524,136	\$510,318	0.88
Hayes Rd & 25 Mile Rd	Rural	-2.992	0.939	-\$24,532	\$101,160	\$76,629	\$528,430	\$510,318	0.90
Romeo Plank Rd & 19 Mile Rd	Rural	-4.343	0.268	-\$35,609	\$28,882	-\$6,727	\$3,110,094	\$1,668,896	1.87
Romeo Plank Rd & Cass Ave	Rural	-9.082	0.252	-\$74,473	\$27,141	-\$47,332	\$3,110,094	\$1,668,896	1.92
M-53 ramp & 26-Mile	Rural	4.188	1.977	\$34,345	\$213,073	\$247,419	\$1,977,270	\$1,668,896	1.03
M-53 ramp & 26-Mile	Rural	-1.646	0.466	-\$13,499	\$50,242	\$36,743	\$1,977,270	\$1,668,896	1.16
M-46/Apple Ave & M-37/Newaygo Rd	Rural	1.657	1.228	\$13,588	\$132,371	\$145,960	\$464,137	\$510,318	0.71
Cooley Lake Rd & Bogie Lake Rd	Rural	-1.505	1.880	-\$12,344	\$202,650	\$190,306	\$464,137	\$510,318	0.66
Cooley Lake Rd & Oxbow Lake Rd	Rural	-1.801	-0.035	-\$14,770	-\$3,764	-\$18,534	\$464,137	\$510,318	0.94
Baldwin Rd/Indianwood Rd & S. Coats Rd	Rural	-3.180	0.246	-\$26,080	\$26,503	\$423	\$1,977,270	\$1,668,896	1.18
Old US-27/North Hwy & Livingston Blvd	Rural	-0.237	-0.069	-\$1,945	-\$7,451	-\$9,397	\$464,137	\$510,318	0.93
68th Ave & Randall St/ State	Rural	-2.746	0.199	-\$22,521	\$21,416	-\$1,105	\$1,977,270	\$1,668,896	1.19
I-75 & M-81/Washington Road	Rural	0.890	0.156	\$7,299	\$16,762	\$24,061	\$1,977,270	\$1,668,896	1.17
I-75 & M-81/Washington Road	Rural	3.206	0.591	\$26,293	\$63,671	\$89,965	\$1,977,270	\$1,668,896	1.12
Geddes Rd & Superior Rd	Rural	-0.355	0.177	-\$2,911	\$19,118	\$16,207	\$1,977,270	\$1,668,896	1.17
Average		-0.899	0.544	-\$7,372	\$58,584	\$51,212			
TOTAL		-17.980	10.871	-\$147,437	\$1,171,666	\$1,024,233			

URBAN ROUNDABOUTS

Intersection	Environment	Delta PDO/year	Delta injury/year	Point Estimate \$ benefit			Construction Cost	Delay Benefit	Time of Return (years)
				PDO/year	Injury/year	ALL/year			
I-94 Business (Main St) & Riverview Dr	Urban	3.013	1.186	\$24,704	\$127,784	\$152,488	\$464,137	\$510,318	0.70
I-94 Business (Main St) & 5th St	Urban	1.451	0.536	\$11,897	\$57,751	\$69,649	\$464,137	\$510,318	0.80
Lake Lansing Rd & Chamberlain Dr	Urban	-2.689	-0.615	-\$22,047	-\$66,322	-\$88,369	\$750,000	\$1,668,896	0.47
Wood St & Sam's Way	Urban	-2.455	-0.658	-\$20,134	-\$70,910	-\$91,044	\$750,000	\$1,668,896	0.48
Michigan Ave & Washington Square	Urban	1.231	0.026	\$10,092	\$2,794	\$12,886	\$464,137	\$510,318	0.89
Mosher St & Main St	Urban	0.092	0.344	\$753	\$37,128	\$37,881	\$464,137	\$510,318	0.85
Michigan Ave & Rankin St	Urban	2.767	0.045	\$22,691	\$4,809	\$27,500	\$1,977,270	\$1,668,896	1.17
Cherry St & Jefferson Ave	Urban	0.930	0.969	\$7,627	\$104,432	\$112,059	\$464,137	\$510,318	0.75
Wealthy St & Lafayette Ave	Urban	3.038	0.162	\$24,914	\$17,454	\$42,368	\$464,137	\$510,318	0.84
Wealthy St & Jefferson Ave	Urban	3.651	2.596	\$29,939	\$279,835	\$309,776	\$464,137	\$510,318	0.57
Main St & 3rd St	Urban	-0.597	0.624	-\$4,896	\$67,299	\$62,403	\$464,137	\$510,318	0.81
Utica Rd & Dodge Park Rd	Urban	6.937	1.156	\$56,880	\$124,618	\$181,498	\$3,393,431	\$1,668,896	1.83
3rd St & Western Ave	Urban	-0.723	0.016	-\$5,929	\$1,763	-\$4,166	\$464,137	\$510,318	0.92
Nixon Rd & Huron Pkwy	Urban	1.061	0.582	\$8,698	\$62,716	\$71,414	\$464,137	\$510,318	0.80
Maple Rd & M-14	Urban	-4.858	0.441	-\$39,838	\$47,560	\$7,721	\$1,977,270	\$1,668,896	1.18
Maple Rd & M-14	Urban	-0.688	0.517	-\$5,641	\$55,695	\$50,055	\$1,977,270	\$1,668,896	1.15
Average		0.760	0.495	\$6,232	\$53,401	\$59,632			
TOTAL		12.160	7.927	\$99,710	\$854,406	\$954,119			

INTERCHANGE ROUNDABOUTS

Intersection	Roundabout Type	Delta PDO/year	Delta injury/year	Point Estimate \$ benefit			Construction Cost	Delay Benefit	Time of Return (years)
				PDO/year	Injury/year	ALL/year			
I-94 Business (Main St) & Riverview Dr	Single Lane	3.013	1.186	\$24,704	\$127,784	\$152,488	\$464,137	\$510,318	0.70
I-94 Business (Main St) & 5th St	Single Lane	1.451	0.536	\$11,897	\$57,751	\$69,649	\$464,137	\$510,318	0.80
US-127 BR & Mission St	Single Lane	0.239	0.382	\$1,959	\$41,202	\$43,161	\$464,137	\$510,318	0.84
M-53 ramp & 26-Mile	double lane	4.188	1.977	\$34,345	\$213,073	\$247,418	\$1,977,270	\$1,668,896	1.03
M-53 ramp & 26-Mile	double lane	-1.646	0.466	-\$13,499	\$50,242	\$36,743	\$1,977,270	\$1,668,896	1.16
I-75 & M-81/Washington Road	double lane	0.890	0.156	\$7,299	\$16,762	\$24,061	\$1,977,270	\$1,668,896	1.17
I-75 & M-81/Washington Road	double lane	3.206	0.591	\$26,293	\$63,671	\$89,965	\$1,977,270	\$1,668,896	1.12
Maple Rd & M-14	double lane	-4.858	0.441	-\$39,838	\$47,560	\$7,721	\$1,977,270	\$1,668,896	1.18
Maple Rd & M-14	double lane	-0.688	0.517	-\$5,641	\$55,695	\$50,054	\$1,977,270	\$1,668,896	1.15
Average		0.644	0.695	\$5,280	\$74,860	\$80,140			
TOTAL		5.795	6.251	\$47,519	\$673,742	\$721,261			

BENEFIT/COST ANALYSIS

EB M-14 Ramps at Maple Road

PEAK HOUR SUMMARY STATISTICS		PEAK PERIOD SUMMARY STATISTICS	
	Stop Delay (hr)		Stop Delay (veh*hr)
8:00 AM - 9:00 AM		AM Period (6:00 AM - 11:00 AM)	
Total Network		Total Network	
Before	105.5	Before	562.2
After	6.5	After	34.6
Change	-99.0	Change	-527.6
5:00 PM - 6:00 PM		PM Period (11:00 AM - 10:00 PM)	
Total Network		Total Network	
Before	37.1	Before	186.1
After	6.5	After	32.6
Change	-30.6	Change	-153.5
DAILY SUMMARY STATISTICS		BENEFIT/COST EVALUATION	
	Stop Delay (veh*hr)	Stop Delay Savings	
Before	748.32	veh*hrs	Person - \$
After	67.25	Daily Savings	681.08 \$10,301
Change	-681.08	Yearly Savings	170,270 \$2,575,331
% Change	-91.0%	Total Project Cost:	\$100,000
		Benefit/Cost:	25.75
<hr/>			
<i>Assumptions</i>			
Avg. # of Workdays/Year		250	
Avg. Vehicle Occupancy		1.1	
Avg. Value of Time/Individual (\$/hr)		\$13.75	

BENEFIT/COST ANALYSIS

Huron Pkwy at Nixon Road

PEAK HOUR SUMMARY STATISTICS		PEAK PERIOD SUMMARY STATISTICS	
	Stop Delay (hr)		Stop Delay (veh*hr)
7:00 AM - 8:00 AM		AM Period (6:00 AM - 11:00 AM)	
Total Network		Total Network	
Before	22.3	Before	108.6
After	5.7	After	27.8
Change	-16.6	Change	-80.9
5:00 PM - 6:00 PM		PM Period (11:00 AM - 10:00 PM)	
Total Network		Total Network	
Before	19.5	Before	83.1
After	6.8	After	29.0
Change	-12.7	Change	-54.1
DAILY SUMMARY STATISTICS		BENEFIT/COST EVALUATION	
	Stop Delay (veh*hr)	Stop Delay Savings	
Before	191.69	veh*hrs	Person - \$
After	56.73	Daily Savings	134.96 \$2,041
Change	-134.96	Yearly Savings	33,740 \$510,318
% Change	-70.4%	Total Project Cost:	\$660,000
		Benefit/Cost:	0.77
<hr/>			
<i>Assumptions</i>			
Avg. # of Workdays/Year		250	
Avg. Vehicle Occupancy		1.1	
Avg. Value of Time/Individual (\$/hr)		\$13.75	

BENEFIT/COST ANALYSIS

Maple and Drake

PEAK HOUR SUMMARY STATISTICS		PEAK PERIOD SUMMARY STATISTICS	
	Stop Delay (hr)		Stop Delay (veh*hr)
8:00 AM - 9:00 AM		AM Period (6:00 AM - 11:00 AM)	
Total Network		Total Network	
Before	35.0	Before	232.4
After	5.7	After	37.8
Change	-29.3	Change	-194.6
5:00 PM - 6:00 PM		PM Period (11:00 AM - 10:00 PM)	
Total Network		Total Network	
Before	55.0	Before	341.5
After	6.4	After	39.7
Change	-48.6	Change	-301.7
DAILY SUMMARY STATISTICS		BENEFIT/COST EVALUATION	
	Stop Delay (veh*hr)	Stop Delay Savings	
Before	573.87	veh*hrs	Person - \$
After	77.58	Daily Savings	496.29 \$7,506
Change	-496.29	Yearly Savings	124,072 \$1,876,588
% Change	-86.5%	Total Project Cost:	\$1,777,546
		Benefit/Cost:	1.06
<hr/>			
<i>Assumptions</i>			
Avg. # of Workdays/Year		250	
Avg. Vehicle Occupancy		1.1	
Avg. Value of Time/Individual (\$/hr)		\$13.75	

BENEFIT/COST ANALYSIS

WB M-14 Ramps at Maple Road

PEAK HOUR SUMMARY STATISTICS		PEAK PERIOD SUMMARY STATISTICS	
	Stop Delay (hr)		Stop Delay (veh*hr)
8:00 AM - 9:00 AM		AM Period (6:00 AM - 11:00 AM)	
Total Network		Total Network	
Before	80.0	Before	499.0
After	7.7	After	48.0
Change	-72.3	Change	-450.9
5:00 PM - 6:00 PM		PM Period (11:00 AM - 10:00 PM)	
Total Network		Total Network	
Before	55.0	Before	345.6
After	9.5	After	59.7
Change	-45.5	Change	-285.9
DAILY SUMMARY STATISTICS		BENEFIT/COST EVALUATION	
	Stop Delay (veh*hr)	Stop Delay Savings	
Before	844.60	veh*hrs	Person - \$
After	107.72	Daily Savings	736.87 \$11,145
Change	-736.87	Yearly Savings	184,218 \$2,786,297
% Change	-87.2%	Total Project Cost:	\$2,138,162
		Benefit/Cost:	1.30
<hr/>			
<i>Assumptions</i>			
Avg. # of Workdays/Year		250	
Avg. Vehicle Occupancy		1.1	
Avg. Value of Time/Individual (\$/hr)		\$13.75	

BENEFIT/COST ANALYSIS

WB M-14 Ramps at Maple Road

PEAK HOUR SUMMARY STATISTICS		PEAK PERIOD SUMMARY STATISTICS	
	Stop Delay (hr)		Stop Delay (veh*hr)
8:00 AM - 9:00 AM		AM Period (6:00 AM - 11:00 AM)	
Total Network		Total Network	
Before	34.2	Before	166.5
After	5.1	After	24.8
Change	-29.1	Change	-141.7
5:00 PM - 6:00 PM		PM Period (11:00 AM - 10:00 PM)	
Total Network		Total Network	
Before	16.0	Before	78.0
After	3.7	After	18.0
Change	-12.3	Change	-60.0
DAILY SUMMARY STATISTICS		BENEFIT/COST EVALUATION	
	Stop Delay (veh*hr)	Stop Delay Savings	
Before	244.51	veh*hrs	Person - \$
After	42.87	Daily Savings	201.64 \$3,050
Change	-201.64	Yearly Savings	50,411 \$762,460
% Change	-82.5%	Total Project Cost:	\$100,000
		Benefit/Cost:	7.62
<hr/>			
<i>Assumptions</i>			
Avg. # of Workdays/Year		250	
Avg. Vehicle Occupancy		1.1	
Avg. Value of Time/Individual (\$/hr)		\$13.75	

APPENDIX E: DETAILED ROUNDABOUT DATA

Study Roundabouts

Intersection	County	City	Jurisdiction	New Build / Converted	Year of Construction	Num Legs	Environment	Before				After					
								Before Control	ADT Major	ADT Major Year	ADT Minor	ADT Minor Year	Roundabout Type	ADT Major	ADT Major Year	ADT Minor	ADT Minor Year
I-94 Business (Main St) & Riverview Dr	Berrien	Benton Harbor	MDOT	Converted	2009	4	Urban	Signalized	10,500	2008	5,978	2003	single lane	10,400	2009	5,921	2009
I-94 Business (Main St) & 5th St	Berrien	Benton Harbor	MDOT	Converted	2009	4	Urban	2-way Stop	10,500	2008	4,256	2003	single lane	10,400	2009	4,215	2009
US-127 BR & Mission St	Clare	Clare	MDOT	Converted	2009	3	Rural	1-way stop	17,250	2007	1,000	2007	single lane	15,400	2009	1,000	2009
Willow Hwy & Canal Rd	Eaton	Meridian Township	Eaton County Road Commission	Converted	2008	4	Rural	awsc	4,997	2004	4,374	2004	single lane	5,217	2010	4,567	2010
Bennett Rd & Hulett Rd	Ingham	Lansing	Ingham County Road Commission	Converted	2004	4	Rural	2-way Stop	6,878	2000	1,741	2000	single lane	5,347	2008	2,189	2006
Lake Lansing Rd & Chamberlain Dr	Ingham	Lansing	Ingham County Road Commission	Converted	2007	3	Urban	1-way stop	15,356	2006	500	2006	double lane	16,141	2,008	500	2008
Wood St & Sam's Way	Ingham	Lansing	Ingham County Road Commission	Converted	2007	4	Urban	1-way stop	6,763	2005	500	2007	double lane	9,342	2008	500	2008
Michigan Ave & Washington Square	Ingham	Lansing	City of Lansing	Converted	2007	4	Urban	awsc	6,325	2003	2,625	2003	single lane	6,119	2008	2,973	2008
Cedar St & Holbrook Dr	Ingham	Holt	Ingham County Road Commission	Converted	2009	4	Rural	1-way stop	9,894	2007	1,000	2007	single/double lane	8,662	2010	1,000	2010
Beal Ave & Barnes Ave	Ingham	Lansing	City of Lansing	Converted	2004	4	Urban	2-way Stop	1,000	2003	1,000	2003	single lane	1,000	2005	1,000	2005
Harding Ave & Pershing Ave	Ingham	Lansing	City of Lansing	Converted	2006	4	Urban	2-way Stop	1,000	2005	1,000	2005	single lane	1,000	2007	1,000	2007
Moores River Dr & Boston Blvd/Pattengill Ave	Ingham	Lansing	City of Lansing	Converted	1998 to 2005	4	Urban	2-way Stop	1,000	2004	1,000	2004	single lane	1,000	2006	1,000	2006
Mosher St & Main St	Isabella	Mt Pleasant		Converted	2009	4	Urban	Signalized	1,000	2008	1,000	2008	single lane	1,000	2010	1,000	2010
Michigan Ave & Rankin St	Kalamazoo	Kalamazoo	City of Kalamazoo	Converted	2004	3	Urban	Stop Controlled	1,000	2003	1,000	2003	double lane	1,000	2010	1,000	2010
Cherry St & Jefferson Ave	Kent	Grand Rapids	City of Grand Rapids	Converted	2007	4	Urban	Signalized	5,412	2005	5,293	2005	single lane	6,185	2009	4,232	2009
Wealthy St & Lafayette Ave	Kent	Grand Rapids	City of Grand Rapids	Converted	2008	4	Urban	Signalized	21,678	2006	6,607	2007	single lane	16,765	2009	5,110	2009
Wealthy St & Jefferson Ave	Kent	Grand Rapids	City of Grand Rapids	Converted	2008	4	Urban	Signalized	21,678	2006	8,490	2005	single lane	16,765	2009	4,679	2009
7 Mile Rd & Brewer Ave	Kent	Plainfield	Kent County Road Commission	Converted	2007	4	Rural	2-way Stop	2,222	2005	1,393	2005	single lane	1,571	2008	1,260	2008
Hamburg Rd & Winans Lake Rd	Livingston	Brighton	Livingston County Road Commission	Converted	2009	3	Rural	1-way stop	6,970	2005	9,420	2006	single lane	6,455	2010	8,700	2010
Kensington Rd & Jacoby Rd	Livingston	Milford	Livingston County Road Commission	Converted	2006	3	Rural	Yield	5,845	2003	2,130	2003	single lane	4,710	2010	2,140	2010
US-23/Whitmore Lake Rd & Lee Rd	Livingston	Brighton	MDOT	Converted	2006	4	Urban	Signalized	16,642	2005	12,851	2005	interchange	13,457	2008	14,599	2008
US-23/Whitmore Lake Rd & Lee Rd	Livingston	Brighton	MDOT	Converted	2006	4	Urban	1-way stop	6,281	2005	15,153	2005	interchange	4,365	2008	21,420	2008
US-23/Whitmore Lake Rd & Lee Rd	Livingston	Brighton	MDOT	Converted	2006	4	Urban	1-way stop	7,412	2005	15,153	2005	interchange	5,151	2008	21,420	2008
Green Oak Village Place & Green Oak Ave	Livingston	Brighton	Private	New Build	2006	4	Urban	-	-	-	-	-	double lane	1,000	2010	1,000	2010
Green Oak Village Place & Lee Rd	Livingston	Brighton	Private	New Build	2006	4	Urban	-	-	-	-	-	double lane	1,000	2010	1,000	2010
Main St & 3rd St	Livingston	Brighton	City of Brighton	Converted	2003	4	Urban	2-way Stop	13,600	2002	6,056	2002	single lane	10,330	2009	4,600	2009
Hayes Rd & 25 Mile Rd	Macomb	Shelby Township	Road Commission of Macomb County	Converted	2005	4	Rural	Stop Controlled	5,435	2004	6,965	2004	single lane	5,270	2008	10,555	2008
Romeo Plank Rd & 19 Mile Rd	Macomb	Macomb Township	Road Commission of Macomb County	Converted	2008	4	Rural	Signalized	18,220	2006	18,690	2006	double lane	13,750	2008	17,350	2008
Romeo Plank Rd & Cass Ave	Macomb	Clinton Township	Road Commission of Macomb County	Converted	2008	3	Rural	Signalized	6,210	2006	21,520	2006	double lane	6,140	2008	22,050	2008
Van Dyke & 18.5 Mile	Macomb	Sterling Heights	MDOT	New Build	2005	4	Urban	1-way stop	24,740	2004	5,450	2004	triple/double lane	23,630	2010	23,425	2008
Utica Rd & Dodge Park Rd	Macomb	Sterling Heights	Road Commission of Macomb County	Converted	2009	3	Urban	Signalized	22,670	2007	8,330	2007	double lane	18,420	2010	9,210	2010
Stratford Blvd and Charleston Dr/Plantation	Macomb	Washington		New Build	2002 to 2005	4	Urban	-	-	-	-	-	single lane	1,000	2010	1,000	2010
Waterside Dr & W. Vergote Dr	Macomb	New Baltimore		New Build	2007	3	Urban	-	-	-	-	-	single lane	1,000	2010	1,000	2010
M-53 ramp & 26-Mile	Macomb	Utica	MDOT	Converted	2009	4	Rural	Ramp stop controlled	9,975	2003	26,011	2003	interchange	10,127	2007	26,366	2007
M-53 ramp & 26-Mile	Macomb	Utica	MDOT	Converted	2009	4	Rural	Ramp stop controlled	1,499	2001	21,364	2003	interchange	1,188	2007	22,306	2007
M-46/Apple Ave & M-37/Newaygo Rd	Muskegon	Casnovia	MDOT	Converted	2009	4	Rural	awsc	6,683	2007	9,618	2006	single lane	6,285	2009	9,679	2009
3rd St & Western Ave	Muskegon	Muskegon	City of Muskegon	Converted	2006	4	Urban	2-way Stop	1,000	2005	1,385	2005	single lane	1,000	2007	1,000	2007
Chesapeake Dr & Walker Rd	Muskegon	Muskegon	Muskegon County Road Commission	New Build	2002	4	Rural	-	-	-	-	-	single lane	1,000	2010	1,000	2010
Maple Rd & Drake Rd	Oakland	West Bloomfield Twsp	Road Commission for Oakland County	Converted	2007	4	Urban	Signalized	23,680	2005	12,830	2005	triple/double lane	24,500	2009	12,700	2009
Maple Rd & Farmington Rd	Oakland	West Bloomfield Twsp	Road Commission for Oakland County	Converted	2007	4	Urban	Signalized	23,810	2005	12,570	2005	triple/double lane	24,860	2009	11,780	2009
14 Mile Rd & Farmington Rd	Oakland	Farmington Hills	Road Commission for Oakland County	Converted	2008	4	Urban	Signalized	22,420	2005	13,040	2005	triple/double lane	21,130	2010	11,830	2010
Cooley Lake Rd & Bogle Lake Rd	Oakland	White Lake	Road Commission for Oakland County	Converted	2007	3	Rural	Signalized	11,940	2003	13,100	2003	single lane	9,400	2009	12,320	2009
Cooley Lake Rd & Oxbow Lake Rd	Oakland	White Lake	Road Commission for Oakland County	Converted	2007	3	Rural	1-way stop	8,460	2006	3,250	2004	single lane	7,440	2009	4,540	2010
Commerce Crossing & Loop Rd	Oakland	Walled Lake	Road Commission for Oakland County	New Build	2003	3	Rural	-	-	-	-	-	single lane	1,000	2010	1,000	2010
Baldwin Rd/Indianwood Rd & S. Coats Rd	Oakland	Orion	Road Commission for Oakland County	Converted	2004	4	Rural	Stop Controlled	10,140	2005	8,115	2005	double lane	6,365	2010	5,795	2010
Taft Rd & Morgan Blvd	Oakland	Northville	City of Northville	Converted	2008	4	Rural	2-way Stop	7,860	2006	500	2006	single lane	5,740	2010	500	2010
Chambers/Renton & Johanna Ware	Oakland	Wixom		New Build	2005	4	Urban	-	-	-	-	-	single lane	1,000	2010	1,000	2010
Old US-27/North Hwy & Livingston Blvd	Otsego	Gaylor	Otsego County Road Commission	Converted	2006	3	Rural	1-way stop	1,000	2005	500	2005	single lane	1,000	2007	500	2007
68th Ave & Randall St/ State	Ottawa	Coopersville	City of Coopersville	Converted	2007	4	Rural	awsc	9,032	2006	7,755	2006	double lane	7,922	2010	6,178	2010
I-75 & M-81/Washington Road	Saginaw	Saginaw	MDOT	Converted	2006	4	Rural	Signalized	5,868	2005	13,400	2005	interchange	5,609	2009	9,750	2009
I-75 & M-81/Washington Road	Saginaw	Saginaw	MDOT	Converted	2006	4	Rural	Signalized	5,920	2005	13,400	2005	interchange	3,820	2009	9,750	2009
Nixon Rd & Huron Pkwy	Washtenaw	Ann Arbor	City of Ann Arbor	Converted	2009	4	Urban	awsc	9,382	2006	4,283	2006	single lane	9,327	2010	3,049	2010
Geddes Rd & Superior Rd	Washtenaw	Ypsilanti	Washtenaw County Road Commission	Converted	2008	3	Rural	awsc	9,680	2003	7,391	2000	double lane	11,360	2009	5,780	2008
Maple Rd & M-14	Washtenaw	Ann Arbor	MDOT	Converted	2007	4	Urban	2-way Stop	11,532	2006	2,014	2005	interchange	11,233	2008	1,720	2008
Maple Rd & M-14	Washtenaw	Ann Arbor	MDOT	Converted	2007	4	Urban	2-way Stop	3,866	2006	6,375	2005	interchange	3,832	2008	5,445	2008
Maple & Skyline High School	Washtenaw	Ann Arbor	Washtenaw County Road Commission	New Build	2007	3	Urban	-	-	-	-	-	single lane	2,862	2010	500	2010
Campus Parkway & Community Dr	Washtenaw	Saline	Washtenaw County Road Commission	New Build	2004	4	Urban	-	-	-	-	-	single lane	2,230	2005	1,267	2007
Campus Parkway & Suncrest Dr	Washtenaw	Saline	Washtenaw County Road Commission	New Build	2004	4	Urban	-	-	-	-	-	single lane	2,230	2005	340	2010

* = assumed value

bold = assumed values


500 used for small developments
1000 used for local and rural roads

Road	Annual Growth Rate	Source
M-14 EB Ramp	-1.30%	Obtained from SEMCOG (traffic counts)
M-14 WB Ramp	-0.44%	
Maple	-5.12%	
Huron	-8.14%	
Nixon	-0.15%	
Michigan	-0.66%	Obtained from City of Lansing traffic count database
Washington	1.66%	
Cedar St	-4.33%	
Lake Lansing	2.52%	


Eliminated Roundabouts

Intersection	County	City	Jurisdiction	New Build / Converted	Year of Construction	Num Legs	Environment	Before				After						
								Before Control	ADT Major	ADT Major Year	ADT Minor	ADT Minor Year	Roundabout Type	ADT Major	ADT Major Year	ADT Minor	ADT Minor Year	
S. Hillsdale St & W. Main St	Calhoun	Homer		New Build	Before 1999									Single Lane				
Tienken Rd & Sheldon Rd/Cemetery	Oakland	Rochester Hills	Road Commission for Oakland County	Converted	2000*	4	rural		17,270	2003	2,000	2003		single lane	17,560	2009	3,610	2008
Tienken Rd/Runyon Rd & Washington Rd	Oakland	Rochester Hills	Road Commission for Oakland County	Converted	2000*	4	rural	1-way stop	17,270	2003	1,090	2005		single lane	17,560	2009	1,300	2010
Utica Park Blvd & Utica Park Dr	Macomb	Utica	Road Commission of Macomb County	New Build	Before 2000	4	Urban	-	-	-	-	-		double lane	N/A	N/A	N/A	N/A
Greenville W Dr & Meijer Dr	Montcalm	Greenville	City of Greenville	New Build	2000	4	rural		N/A	N/A	N/A	N/A		single lane	N/A	N/A	N/A	N/A
Bogue St & Shaw Ln	Ingham	East Lansing	Michigan State University	Converted	2000	4	Urban	Traffic Circle						Single Lane				
4th St & S West Ave	Jackson	Jackson	City of Jackson	Converted	2000	3	Rural	1-way stop	10,863	2006	6,189	2006		Single Lane	10,640	2009	6,362	2009
Blue Star Hwy & North Shore Dr	Allegan	South Haven	Allegan County Road Commission	Converted	2010	4	Rural	2-way Stop						Single	3,448	2010	1,017	2010
N. Kalamazoo Ave/17 Mile Rd & W Michigan Ave	Calhoun	Marshall		Converted	Before 1999	4	Urban							Single Lane				
East Rd & Creyts Rd	Eaton	Dimondale	Eaton County Road Commission	Converted		3	Rural		2,634	2008	3,331	2003		Painted Single Lane			3,660	2010
Glen Dr. & Birch Tree Ln	Grand Traverse	Traverse City		New Build	2006	3	Urban	-	-	-	-	-						
Center St & Main St 4th St	Iron	Alpha		New Build	Before 1992									Single Lane				
Emajeon St. & Arboretum Circle	Kalamazoo	Kalamazoo		New Build			Urban							Single Lane				
Trillium Blvd & Lotus Lily Ave	Kalamazoo	Kalamazoo		New Build			Rural	-						Single Lane				
Pfeiffer Woods & ???	Kent	Kentwood	City of Kentwood	New Build	2005	3	Rural	-						Single Lane				
Sunset Ridge Dr & Saddle Ridge Dr	Kent	Rockford		New Build	2005	4	Rural	-	-	-	-	-		Single Lane				
Hartland Rd & Town Square	Livingston	Hartland	Livingston County Road Commission	New Build	2009	4	Rural	-	6,230	2001	-	-		single lane	6,960	2008	-	-
Patridge Creek Blvd & Hawk Ln	Macomb	Clinton Township	Road Commission of Macomb County	New Build	2006	3	Urban	-	N/A	N/A	N/A	N/A		double lane	5,780	2010		
Patridge Creek Blvd & Scoter Ln	Macomb	Clinton Township	Road Commission of Macomb County	New Build	2006	3	Urban	-	N/A	N/A	N/A	N/A		double lane	5,780	2010		
Romeo Plank Rd & Canal Rd	Macomb	Clinton Township	Road Commission of Macomb County	Converted	2011	4	Rural	awsc	6,210	2006	8,815	2004		Single Lane	6,140	2008	7,605	2006
Lakeshore Drive and Cottage/Monroe Stree	Manistee	Manistee	City of Manistee	New Build	1992	3	rural	-	N/A	N/A	N/A	N/A		single lane	N/A	N/A	N/A	N/A
US-41/M-28 & Front St	Marquette	Marquette	MDOT	Converted	2010	3	rural	Stop Controlled	15,400	2007	23,600	2007		Double Lane	16,700	2009	22,600	2009
Grand River Ave & Travis Ln	Oakland	New Hudson	Road Commission for Oakland County	Converted	2009	3	rural	1-way stop	14,260	2006				double lane	10,300	2010		
Grand River Ave & Lyon Center Dr	Oakland	New Hudson	Road Commission for Oakland County	Converted	2008	4	rural	2-way Stop	4,360	2008	4,740	2006		double lane	4,580	2010	4,470	2007
Lyon Center & Pontiac Trail	Oakland	New Hudson	Road Commission for Oakland County	Converted	2010	4	rural	1-way stop						Single Lane				
Martin Rd & Library	Oakland	Walled Lake	Road Commission for Oakland County	Converted	2009	4	rural	-						single lane				
Martin Rd & Pga Dr	Oakland	Walled Lake	Road Commission for Oakland County	Converted	2009	3	rural							double lane				
Oakley Park Rd & Martin Rd	Oakland	Walled Lake	Road Commission for Oakland County	Converted	2009	4	rural	signal	8,610	2008	6,550	2003		double lane	7,330	2010	6,880	2006
Livernois Rd & Hamlin Rd	Oakland	Rochester Hills	City of Rochester Hills	Converted	2010	4	rural	signal	17,645	2006	12,250	2005			17,015	2009	12,480	2008
Livernois Rd & Tienken Rd	Oakland	Rochester Hills	City of Rochester Hills	Converted		4	rural	signal	7,985	2007	20,470	2007			8,265	2009	19,850	2009
M-43 and 72nd St and 12th Ave/CR 689	Van Buren	South Haven	MDOT	Converted	2008	6	rural	signal						single lane				
I-94 & Main St	Van Buren	Mattawan	MDOT	Converted	2011	4	rural	ramp stop						interchange				
I-94 & Main St	Van Buren	Mattawan	MDOT	Converted	2011	4	rural	signal						interchange				
Whittaker Rd & Stony Creek Rd	Washtenaw	Ypsilanti	Washtenaw County Road Commission	Converted	2010	4	Urban	signal	14,070	2006	7,960	2006		double lane	13,280	2008	7,290	2008
US-23 & Geddes Rd	Washtenaw	Ann Arbor	MDOT	Converted	2010	4	Urban	signal	4,907	2007	19,680	2006		interchange			20,290	2008
US-23 & Geddes Rd	Washtenaw	Ann Arbor	MDOT	Converted	2011	4	Urban	signal	6,402	2001	16,540	1997		interchange	6,292	2007	18,770	2005
Geddes Rd/Concordia Campus Dr & Earhart Rd	Washtenaw	Ann Arbor	City of Ann Arbor	Converted	2010	4	Urban	signal	16,540	1997	5,110	1998			18,770	2005	4,740	2005
Lakeview Rd & Island Lake	Wayne	Rockwood		New Build	Before 1993	3	Rural	-						single lane				
Hamilton Rd & Marsh Rd	Ingham	Okemos	Ingham County Road Commission	Converted	2000	3	Urban	Signal	11,205	2004	5,188	2001		Single/Double Lane	12,015	2007	4,300	2005

APPENDIX F: ROUNDABOUT DETAILED PLANS

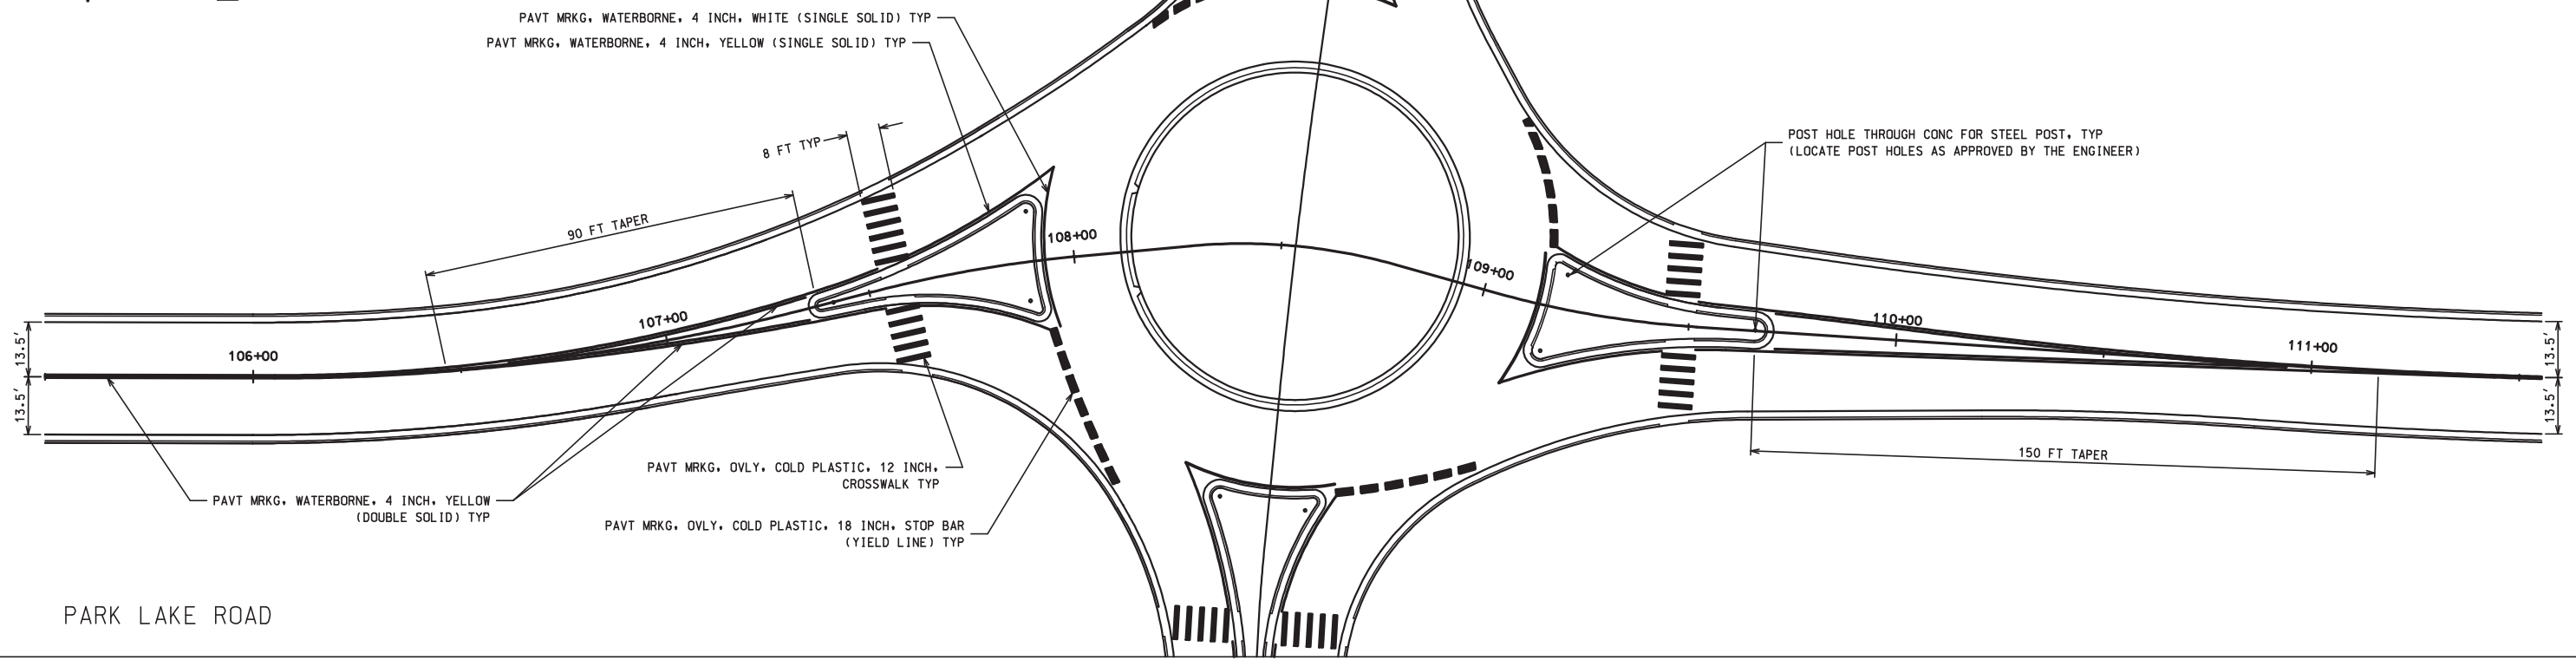

PARK LAKE ROAD

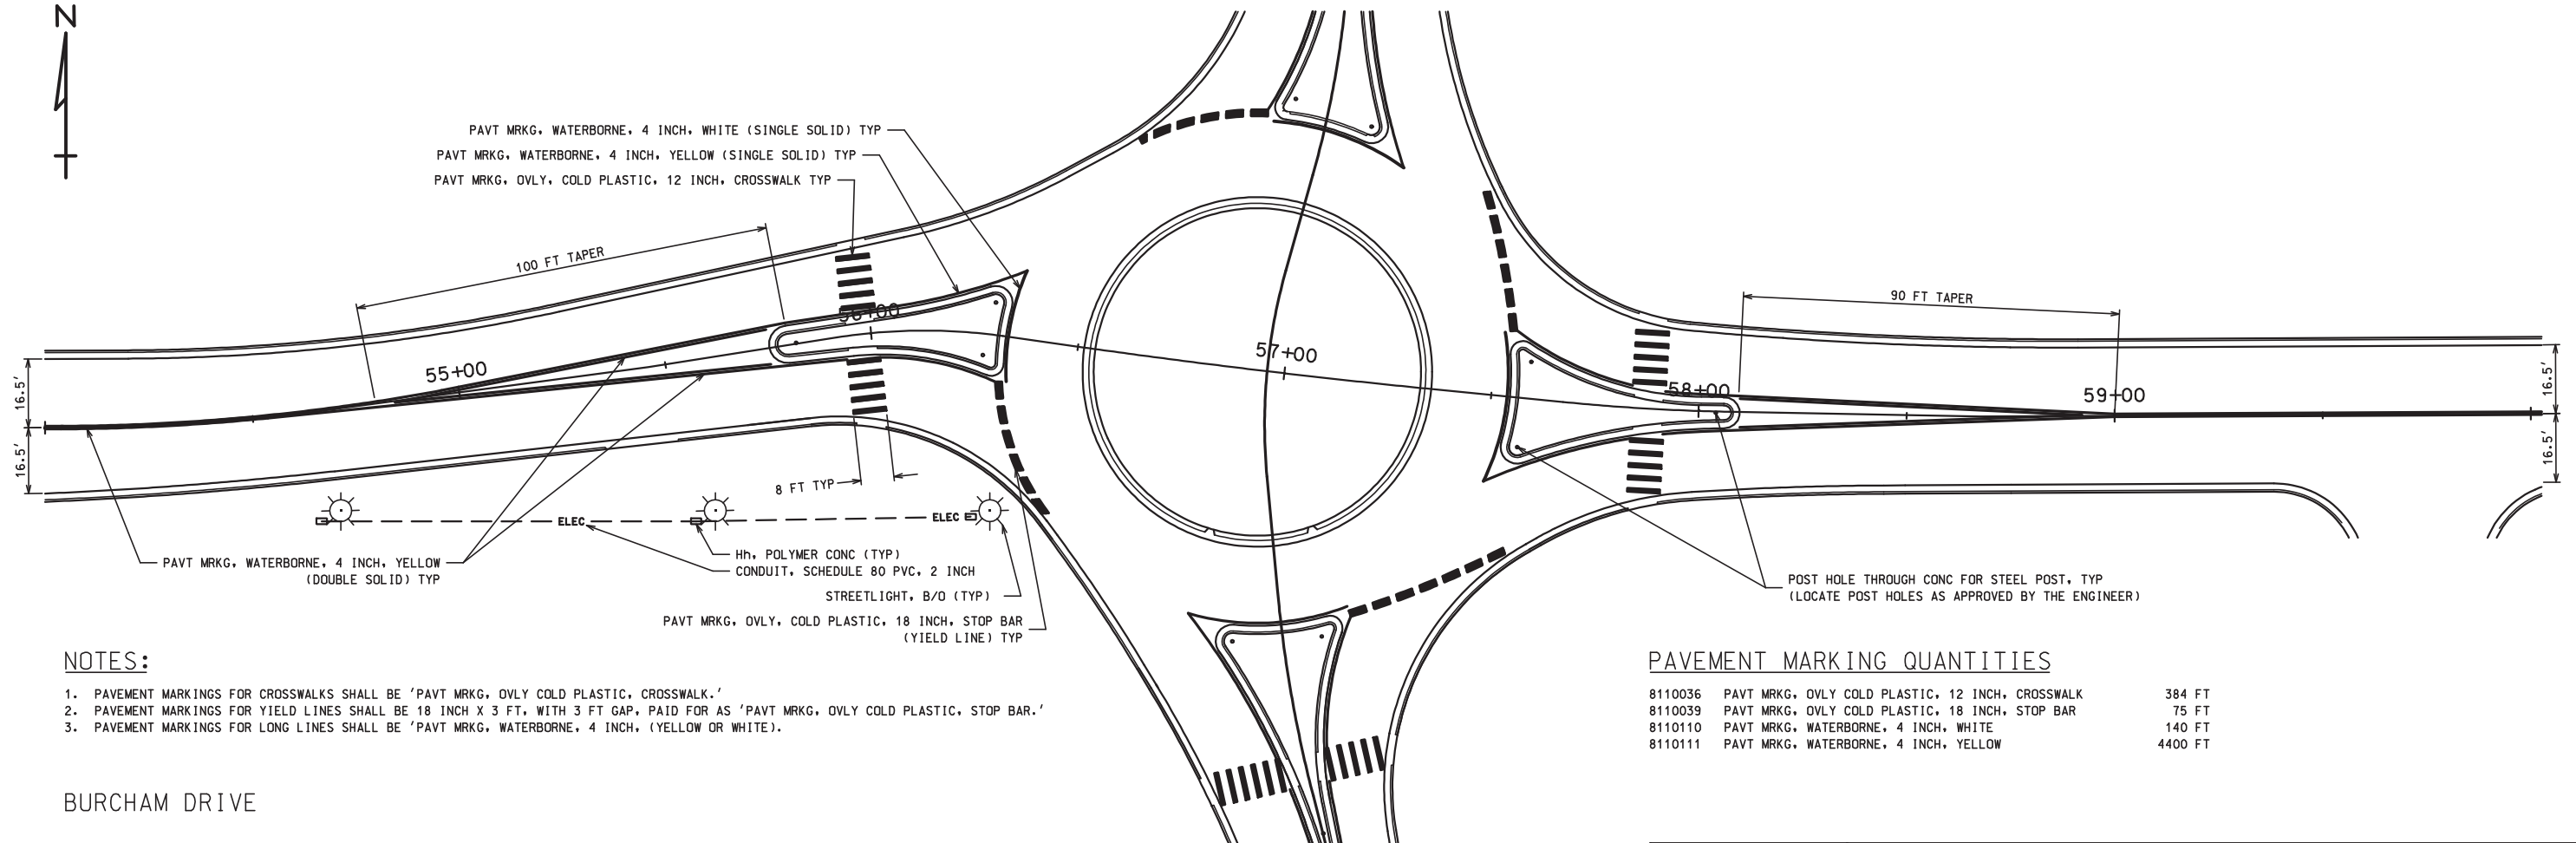

NOTES:

1. PAVEMENT MARKINGS FOR CROSSWALKS SHALL BE 'PAVT MRKG, OVLY COLD PLASTIC, CROSSWALK.'
2. PAVEMENT MARKINGS FOR YIELD LINES SHALL BE 18 INCH X 3 FT, WITH 3 FT GAP, PAID FOR AS 'PAVT MRKG, OVLY COLD PLASTIC, STOP BAR.'
3. PAVEMENT MARKINGS FOR LONG LINES SHALL BE 'PAVT MRKG, WATERBORNE, 4 INCH, (YELLOW OR WHITE).'

BURCHAM DRIVE

PAVEMENT MARKING QUANTITIES

8110036	PAVT MRKG, OVLY COLD PLASTIC, 12 INCH, CROSSWALK	384 FT
8110039	PAVT MRKG, OVLY COLD PLASTIC, 18 INCH, STOP BAR	75 FT
8110110	PAVT MRKG, WATERBORNE, 4 INCH, WHITE	140 FT
8110111	PAVT MRKG, WATERBORNE, 4 INCH, YELLOW	4400 FT

PAVEMENT MARKING/ELECTRIC PLAN





PARK LAKE ROAD & BURCHAM DRIVE

DATE	SCALE	CONT. SEC.	JOB NO.	DESIGN UNIT	SHEET NO.
09/10/11	1" = 20'	33400	112874	TROIA	R.O.W. 22/24

TOP VIEW INSERTED AT 0.0 - ROTATION 0.0 0.0 0.0



BOTTOM VIEW INSERTED AT 0.0 - ROTATION 0.0 0.0 0.0

PLOT SCALE: X=XX

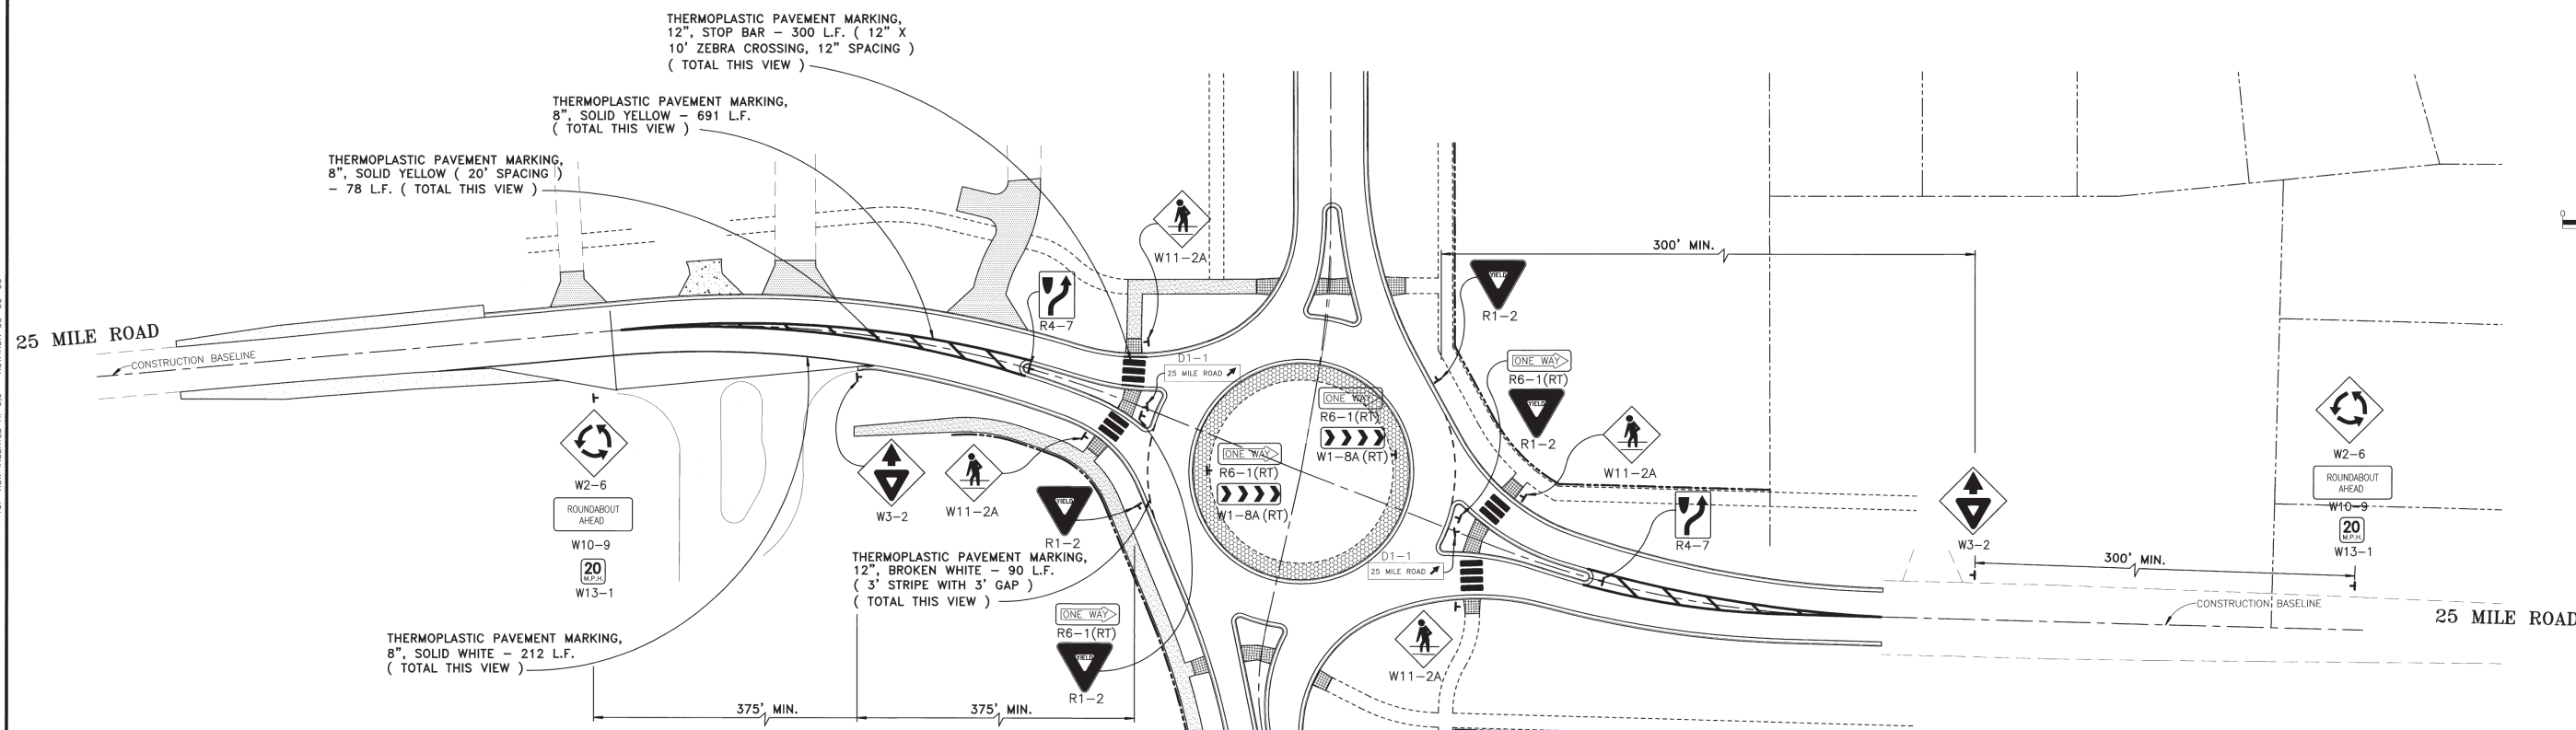

QUANTITIES (THIS SHEET)

NO.	ITEM	PLAN QUANTITY	AS-BUILT QUANTITY
1.	PAVT MRKG, THERMOPL, 12 INCH, STOP BAR	600 FT	
2.	PAVT MRKG, THERMOPL, 8 INCH, YELLOW	1794 FT	
3.	PAVT MRKG, THERMOPL, 8 INCH, WHITE	212 FT	
4.	PAVT MRKG, THERMOPL, 12 INCH, WHITE	174 FT	
5.	SIGN, TYPE III A	8 SFT	
4.	SIGN, TYPE III B	186 SFT	

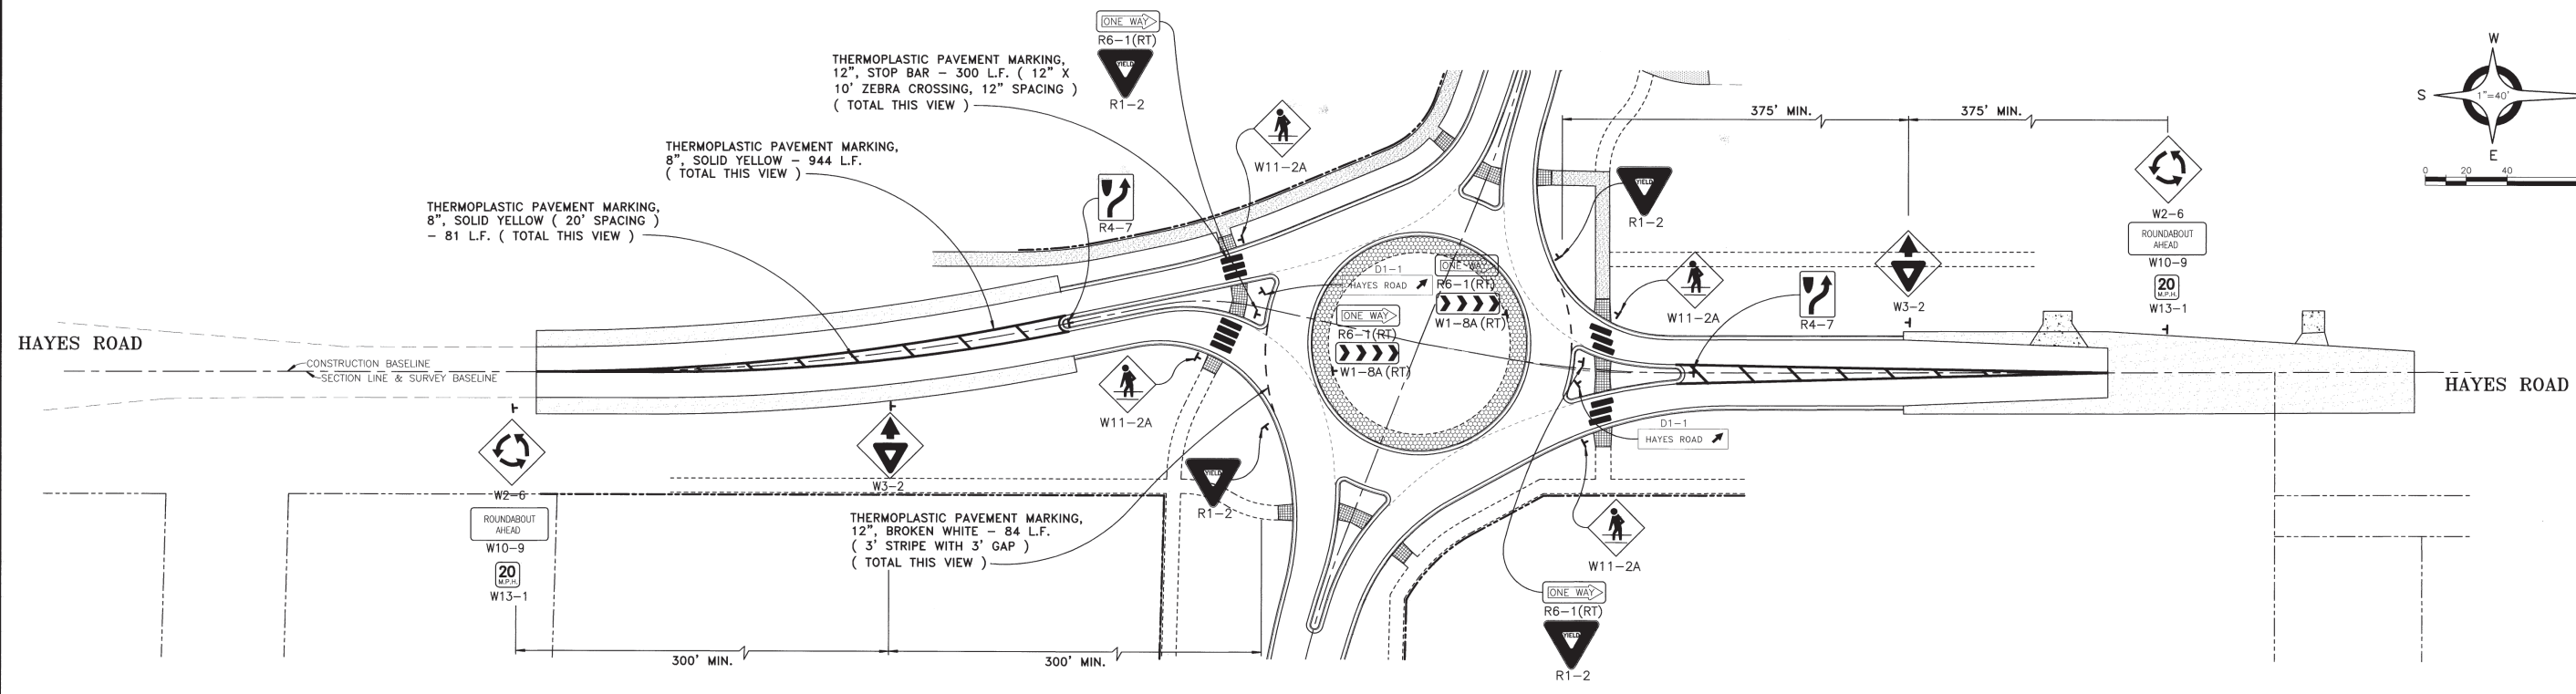

© COPYRIGHT, 2004, ANDERSON, ECKSTEIN AND WESTRICK, INC.

REVISIONS	DATE	REMARKS	DATE	REMARKS
	5-09-05	MRP		PER RCMC
	05-17-05	SMH		SHORTEN ISLAND PER RCMC

3 WORKING DAYS BEFORE YOU DIG CALL MISS DIG 1-800-482-7171
(TOLL FREE)

ROAD COMMISSION OF MACOMB COUNTY, CHARTER TOWNSHIP OF SHELBY AND MACOMB TOWNSHIP

ANDERSON, ECKSTEIN AND WESTRICK, INC.
Civil Engineers • Surveyors • Architects
51301 Schoenherr Road, Shelby Township, Michigan 48315
Phone 586•726•1234 Fax 586•726•8780

25 MILE-HAYES INTERSECTION SIGNAGE & STRIPING PLANS

<input type="checkbox"/> PRELIMINARY	CLIENT CHARTER TOWNSHIP OF SHELBY	PROJECT NO. 132-421	SHEET NO.
<input checked="" type="checkbox"/> CONSTRUCTION	DRAWING SCALE NOT TO SCALE	DATE NOVEMBER, 2004	13
<input type="checkbox"/> AS-BUILT		DRAWN BY SMH CHECK BY <i>[Signature]</i>	

W.O. 5045