



**A** DETAIL - HEMISPHERICAL CAMERA  
NTS

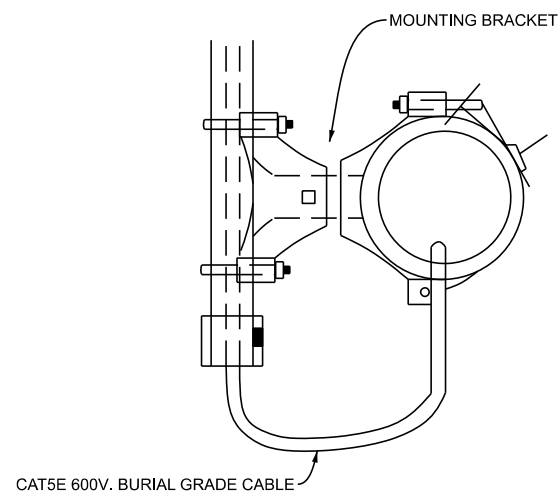


TYPICAL WIRING OF BRACKET ARM/MAST  
ARM MOUNTED HEMISPHERICAL CAMERA  
AND MOUNTING BRACKET

**B** DETAIL - TYPICAL WIRING OF BRACKET ARM/MAST  
NTS

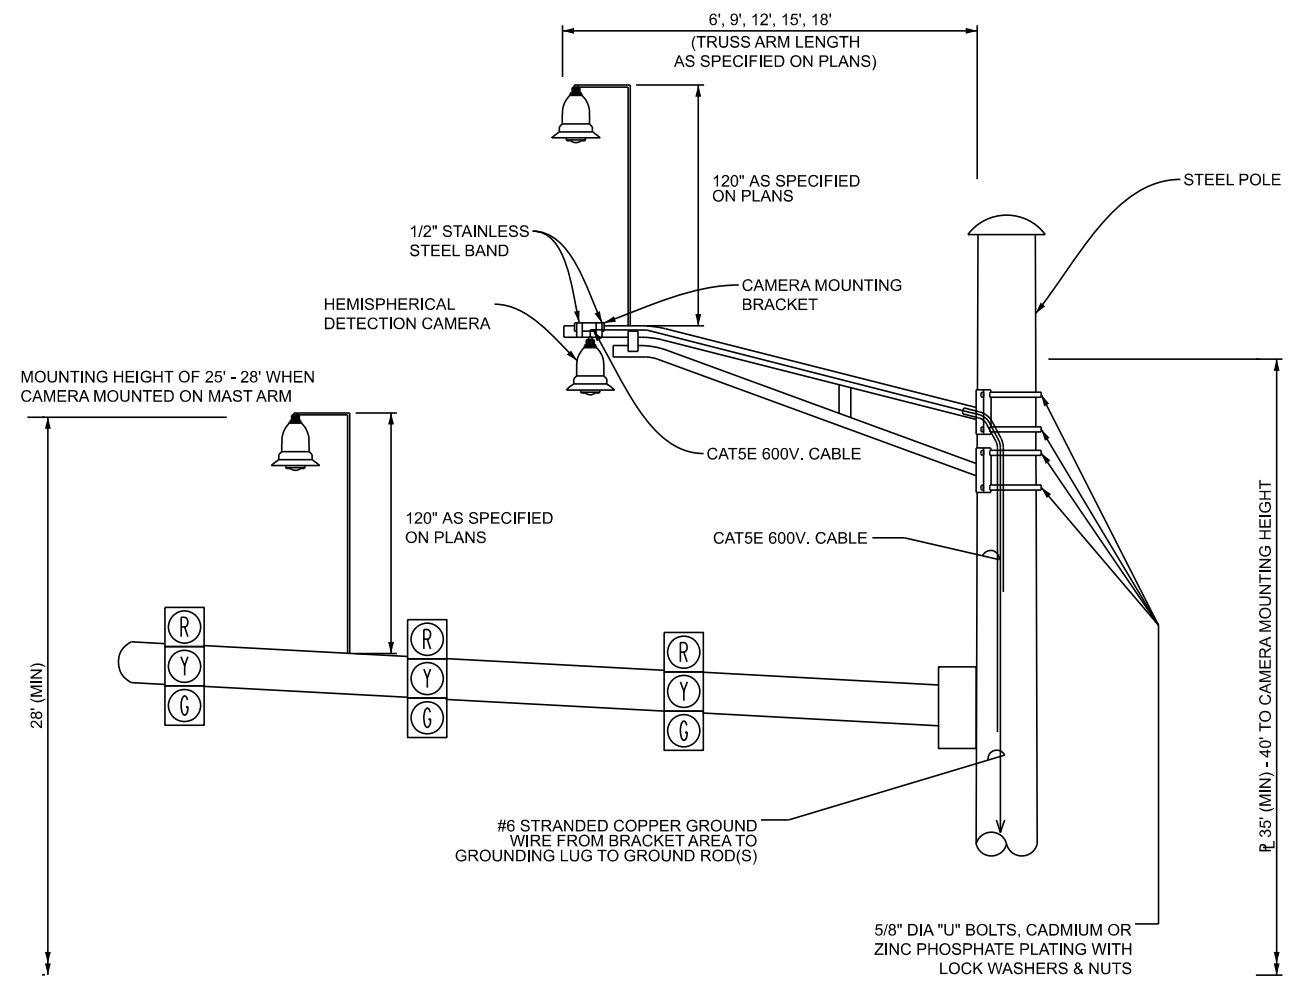

**C** DETAIL - MAST ARM/BRACKET TRUSS ARM MOUNTING DIAGRAMS  
NTS

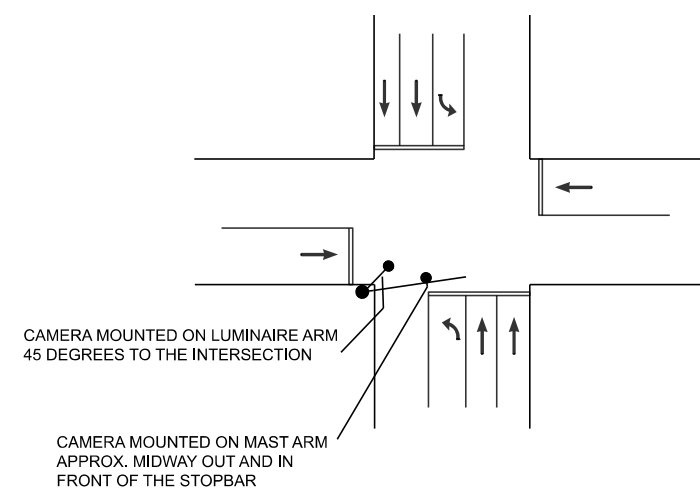

**D** DETAIL - HEMISPHERICAL CAMERA PLACEMENT  
NTS

- NOTES:
1. CAMERA SHOULD BE MOUNTED AT LEAST 35' HIGH WHEN USING A LUMINAIRE ARM AND NO LESS THAN 28' WHEN USING A MAST ARM OR AS SPECIFIED ON THE PLANS.
  2. MAST ARM MOUNTS ARE ONLY ACCEPTABLE IF THE CAMERA CAN BE LOCATED NEAR THE CENTER OF THE INTERSECTION WITH NO OCCLUSION.
  3. CAMERA MUST BE LESS THAN 75' FROM THE INTERSECTION CENTER WHEN MOUNTED ON A LUMINAIRE ARM AND 50' ON MAST ARM.
  4. CAMERA SHOULD BE LOCATED WITH THE LEAST AMOUNT OF OCCLUSION.
  5. INSTALLER SHOULD AIM FOR THE BEST "READ-ON" VIEW OF ALL APPROACHES.
  6. HEMISPHERICAL CAMERA SHALL ONLY BE INSTALLED ON STEEL POLES.