



REDUCTION

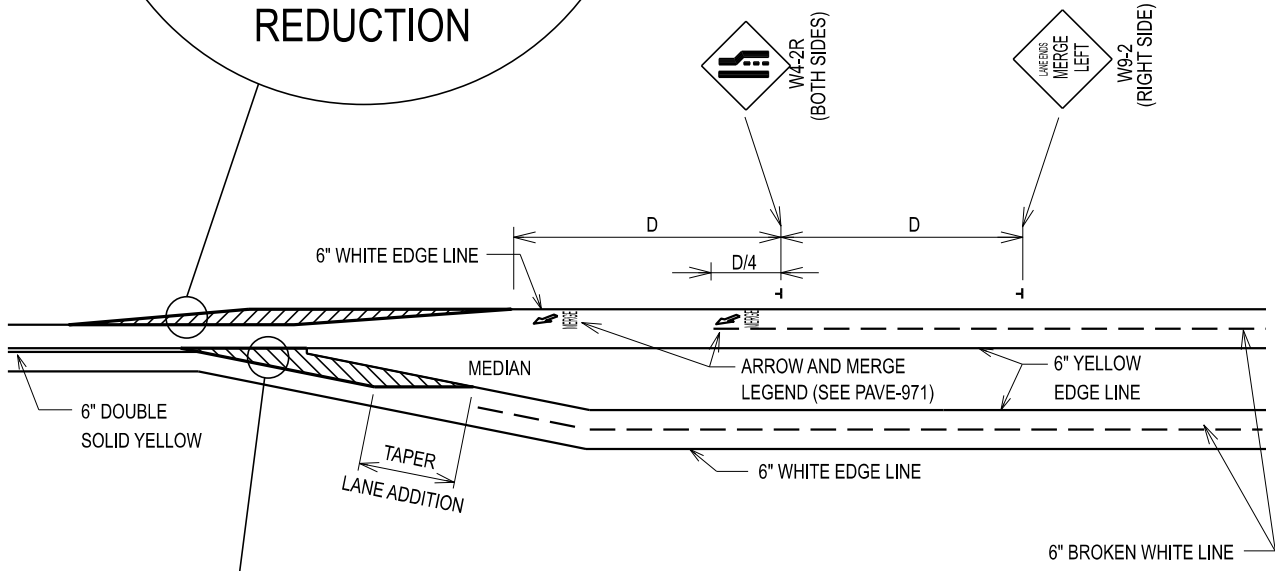

D = ADVANCE WARNING DISTANCE
(REFER TO TABLE 2C-4 OF MMUTCD FOR D VALUES)

FOR "Y" VALUES SEE PAVE-945 SHEET 1

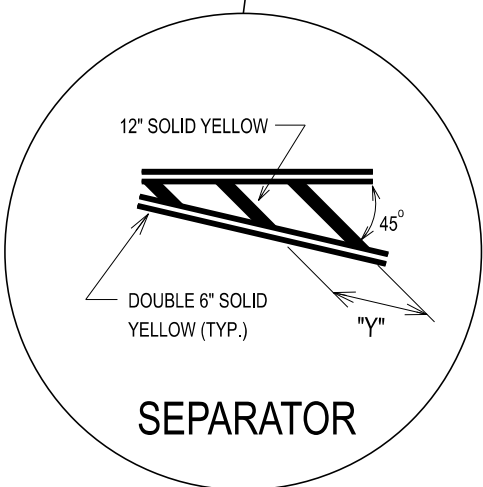

SEPARATOR

PAVEMENT WIDTH REDUCTION CROSS-HATCH SPACING	
POSTED SPEED LIMIT (MPH)	"Z" (FT)
25 OR LESS	10
30	20
35	20
40	40
45	40
50	60
55	60

APPROVED BY: _____
DIRECTOR, BUREAU OF FIELD SERVICES

APPROVED BY: _____
DIRECTOR, BUREAU OF DEVELOPMENT



STANDARD PLAN FOR
2-LANE TO 4-LANE TRANSITION
PAVEMENT MARKINGS

11/22/2023 FHWA APPROVAL	09/13/2023 PLAN DATE	PAVE-970-D	SHEET 1 OF 1
-----------------------------	-------------------------	-------------------	-----------------