



APPENDIX

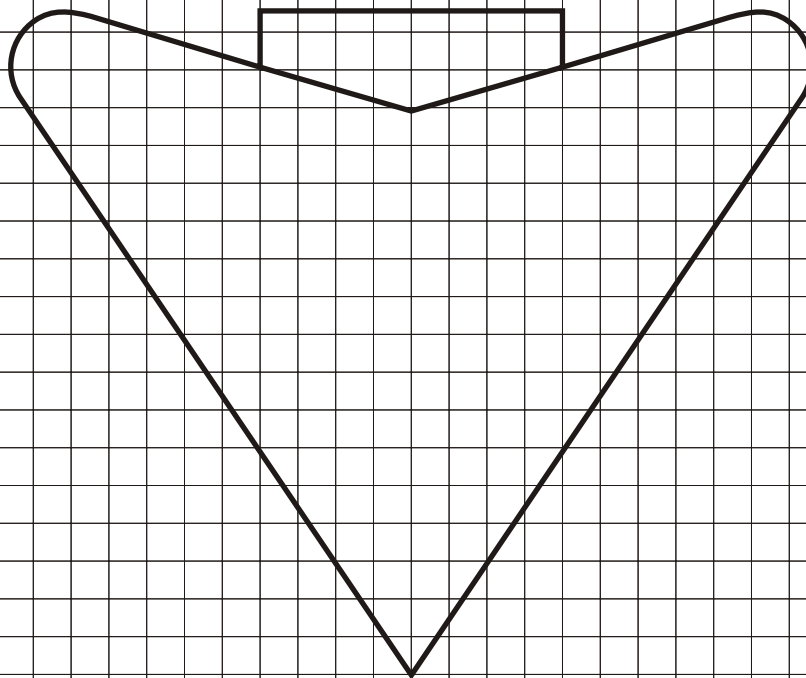


STANDARD ARROW DETAILS

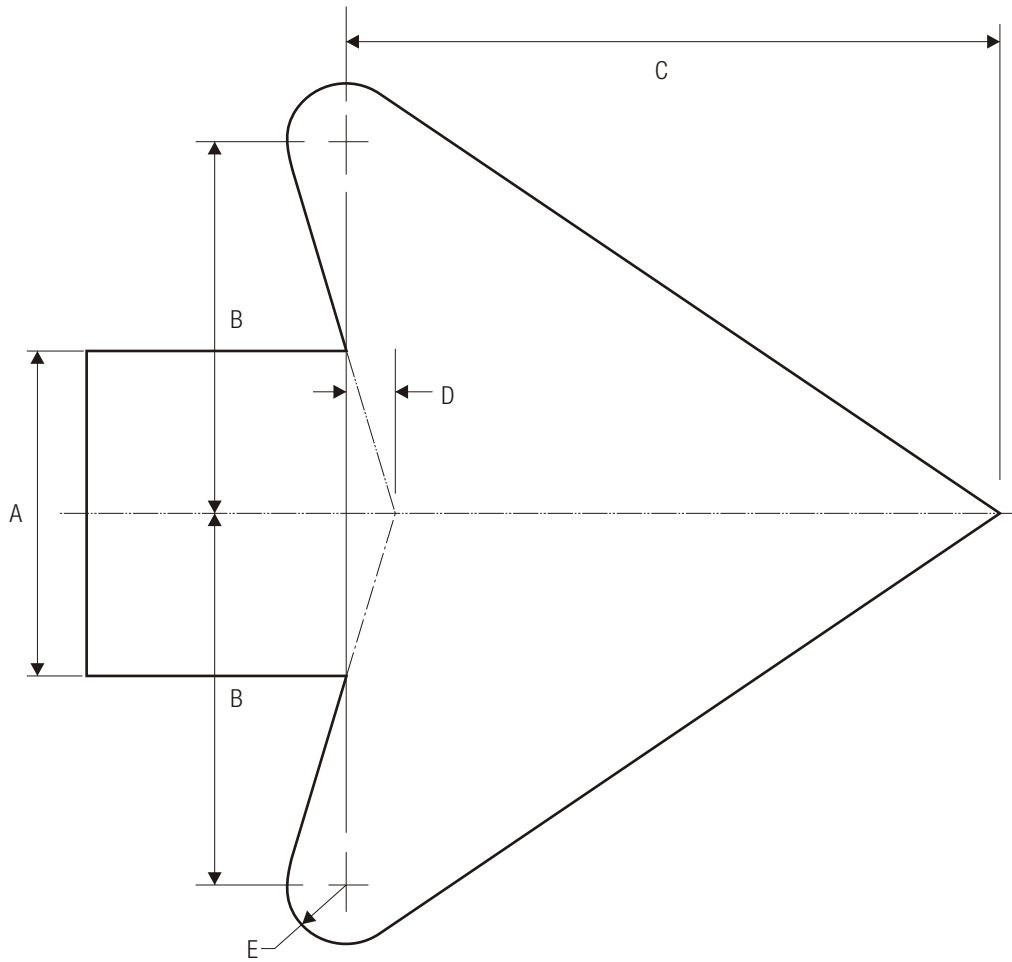


A	B	C	D	E
2	2.313	4.313	.313	.375
2.25	2.625	4.5	.375	.438
2.5	2.875	5.063	.375	.5
2.625	3	5.25	.375	.5
2.75	3	5.563	.438	.563
3	3.5	6.125	.438	.563
3.125	3.625	6.375	.5	.625
3.25	3.75	6.625	.5	.625
3.313	3.813	6.688	.5	.688
3.5	4	7.125	.563	.688
3.75	4.313	7.625	.563	.75
4	4.625	8.125	.625	.813
4.063	4.75	8.25	.625	.813
4.25	4.875	8.625	.625	.813
4.375	5	8.875	.688	.875
4.5	5.188	9.125	.688	.875

A	B	C	D	E
4.75	5.438	9.625	.75	1
4.875	5.625	9.875	.75	1
5	5.75	10.125	.75	1
5.25	6	10.625	.813	1.063
5.5	6.375	11.125	.875	1.125
5.75	6.625	11.688	.875	1.125
6	6.875	12.188	.938	1.188
6.5	7.5	13.188	1	1.625
7	8	14.188	1.063	1.375
7.5	8.625	15.188	1.125	1.5
8	9.188	16.25	1.25	1.625

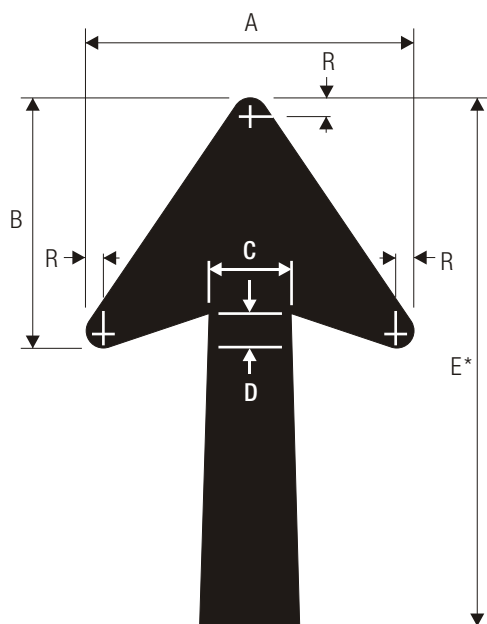

UP ARROW

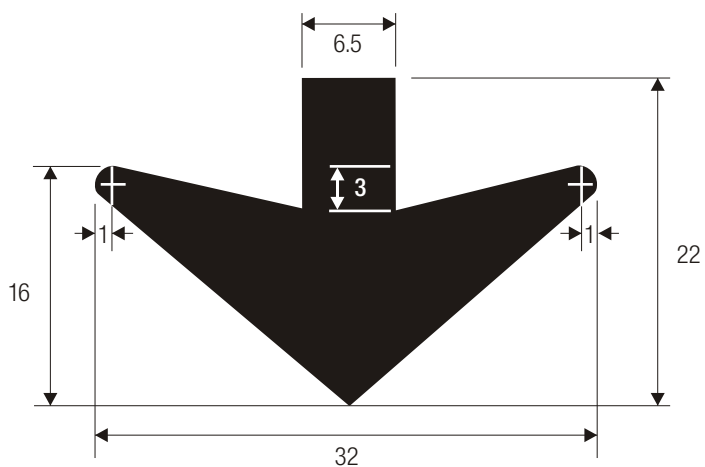


DOWN ARROW

ARROWS FOR GUIDE SIGNS

Dimensions of Arrow When Used With Various Letter Cap Heights.

Letter Size	A	B	C	D	E*	R
8	15.125	11.563	3.75	1.313	17-25	.813
10-13.3	18.25	14	4.5	1.5	20-30	.75
16	22.25	17	5.375	1.75	25-35	1

*Taper of .5" per ft. should be held constant for longer or shorter shaft lengths.

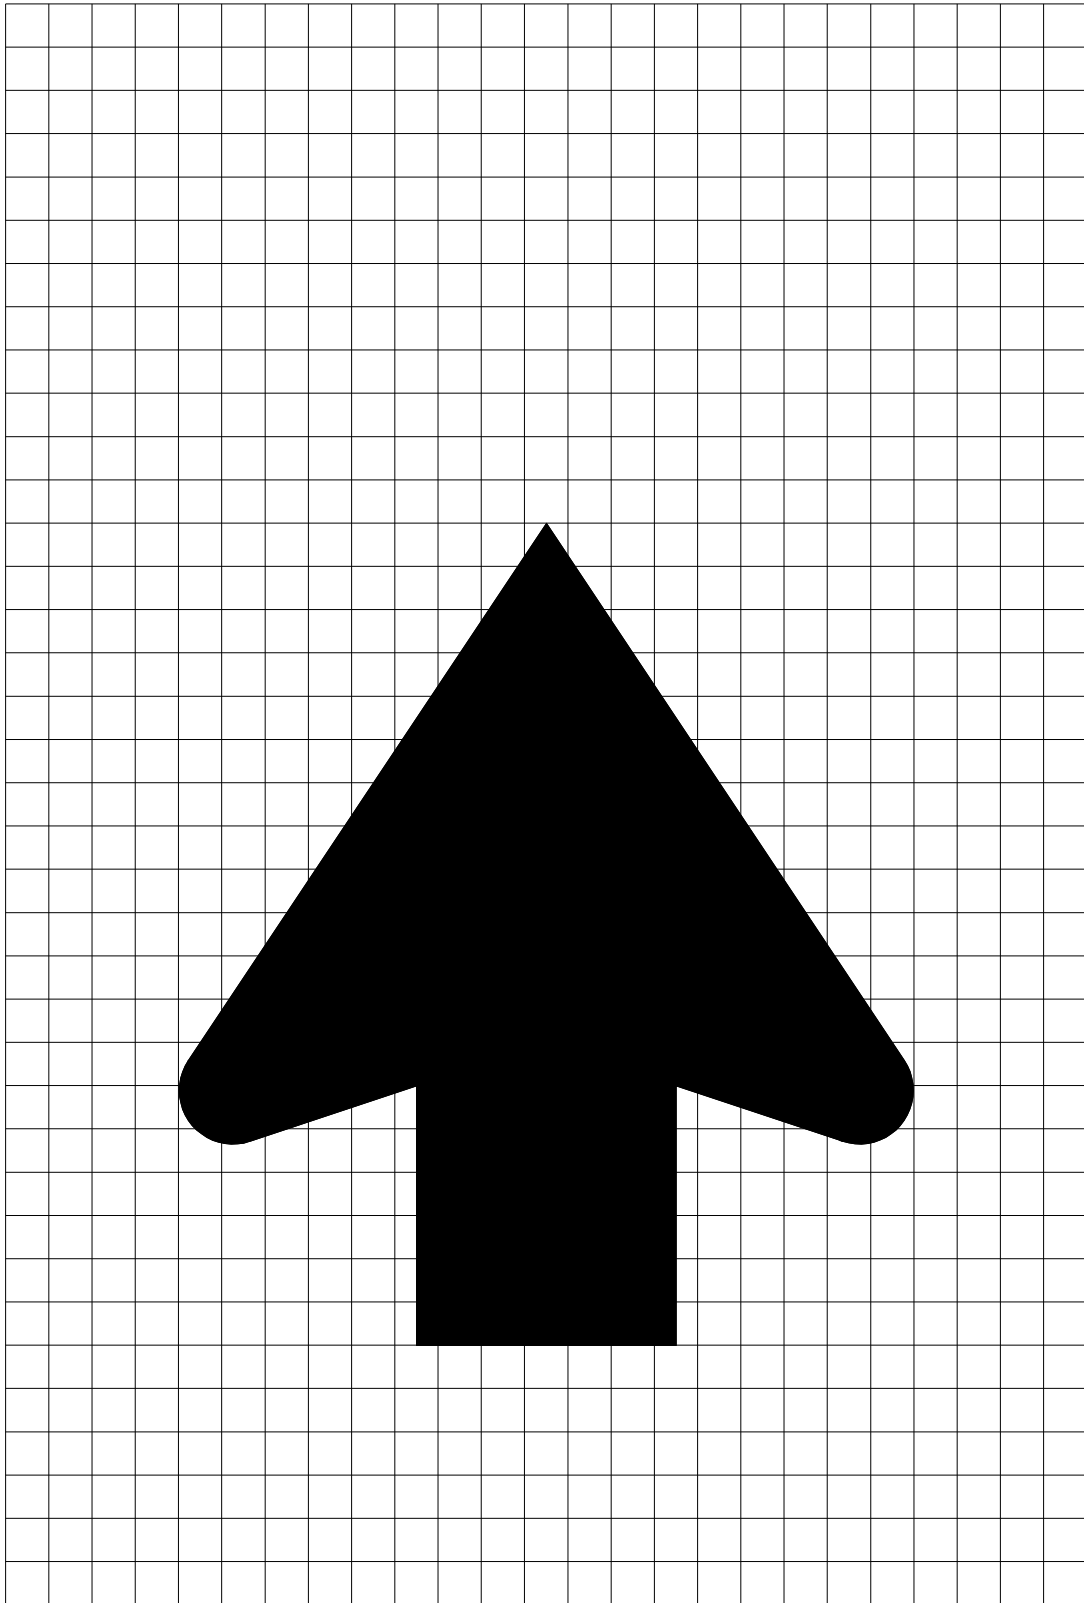

MI/2006


6-3.1 (MI)

K:-DGN-TSR-STDs-ENGLISH-SNDET-FD DA SIGNS-ARROW C DIAG E.TSR

REVISION DATE: 10/19/2006 JT

DRAWN BY:

CHECKED BY: EO

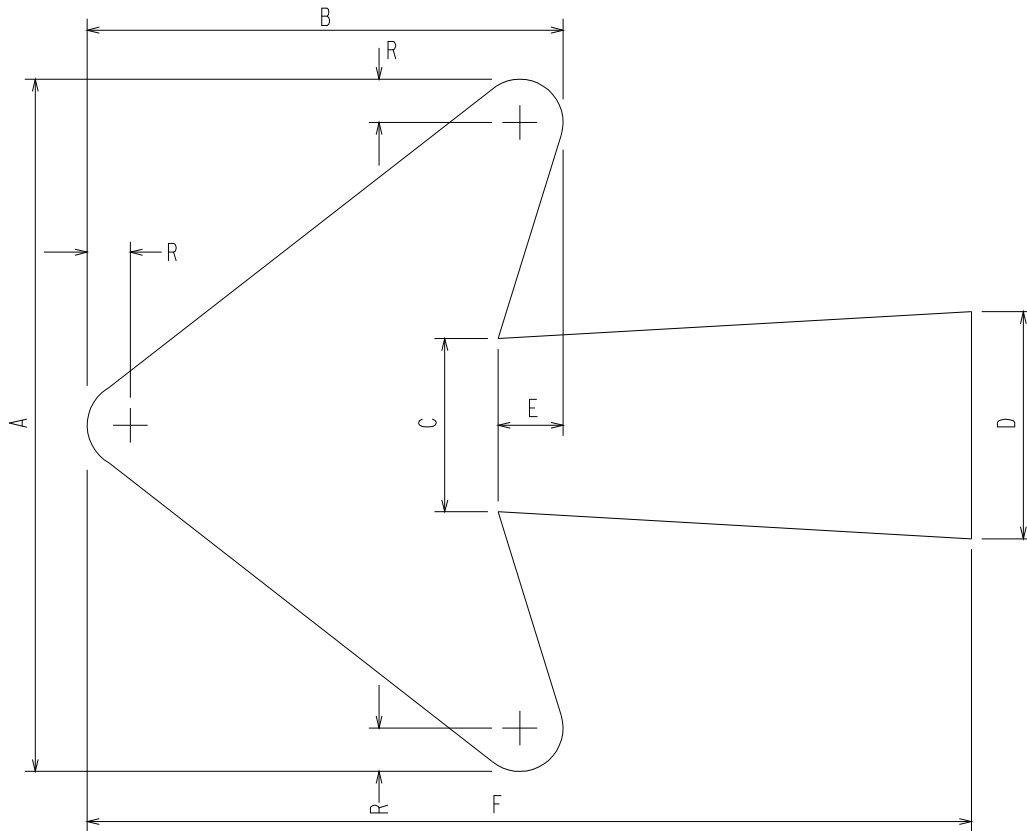

SB-64
ARROW "A"

ARROW NUMBER	DIMENSIONS (INCHES)						
	A	B	C	D	E	F	R
4	4	2-3/4	15/16	1-1/4	3/8	5-3/4	1/4
5	5	3-7/16	1-3/16	1-9/16	7/16	6-7/8	1/4
6	6	4-1/8	1-7/16	1-7/8	9/16	8	5/16
7	7	4-13/16	1-5/8	2-3/16	5/8	9-1/8	3/8
8	8	5-1/2	1-15/16	2-1/2	3/4	10-1/4	7/16
9	9	6-3/16	2-1/8	2-13/16	13/16	11-3/8	1/2
10	10	6-7/8	2-3/8	3-3/16	15/16	12-1/2	9/16
11	11	7-9/16	2-5/8	3-1/2	1-1/16	13-5/8	5/8
12	12	8-1/4	2-13/16	3-13/16	1-1/8	14-3/4	11/16
13	13	8-15/16	3-1/16	4-1/8	1-3/16	15-7/8	11/16
14	14	9-5/8	3-5/16	4-7/16	1-5/16	17	3/4
15	15	10-5/8	3-9/16	4-3/4	1-3/8	18-1/8	7/8
16	16	11	3-13/16	5-1/16	1-1/2	19-1/4	7/8
18	18	12-3/8	4-1/4	5-11/16	1-5/8	21-1/2	1
20	20	13-3/4	4-3/4	6-5/16	1-13/16	22-5/8	1-1/16
22	22	15-1/8	5-3/16	7	2-1/16	25	1-1/4
24	24	16-1/2	5-11/16	7-5/8	2-3/16	26-1/8	1-5/16

MI/2006


6-3.2 (MI)

K:-DGN-TSR-STDS-ENGLISH-SNDET-FD DA SIGNS-SB 64 E.TSR

REVISION DATE: 10/19/2006 JT

DRAWN BY:

CHECKED BY: EO

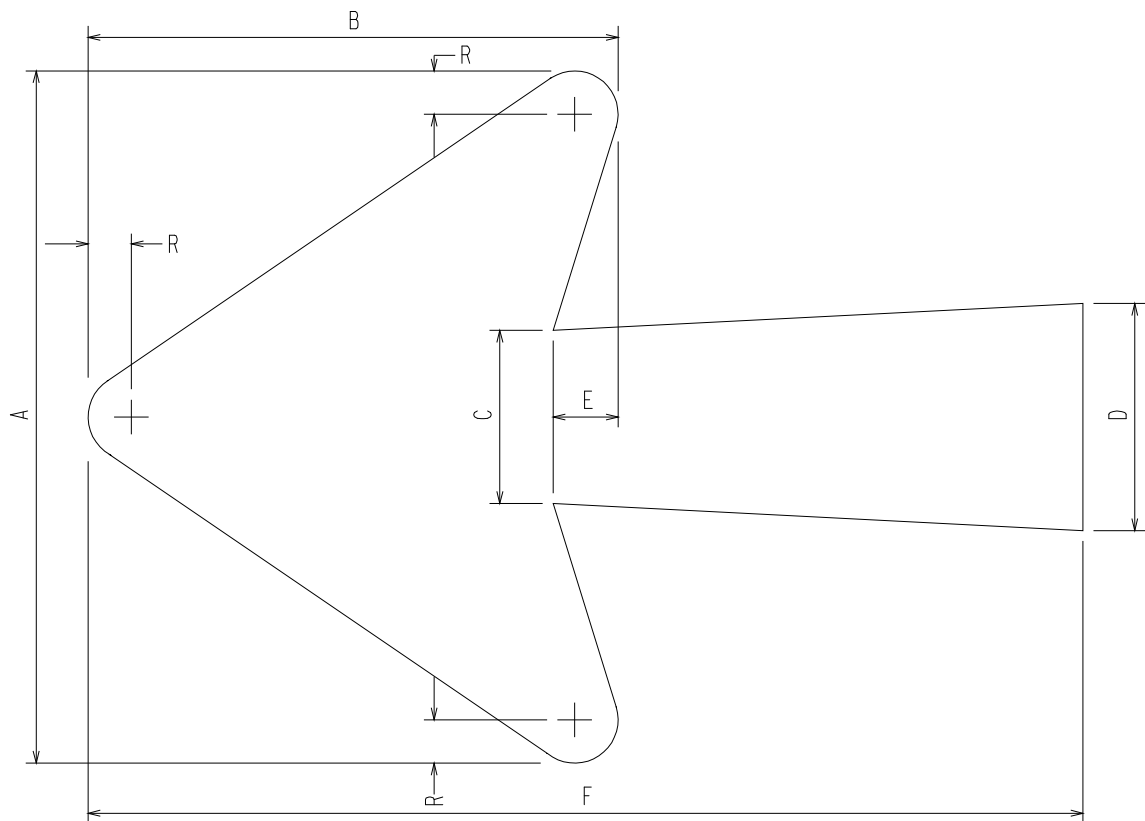

SB-64
ARROW "B"

ARROW NUMBER	DIMENSIONS (INCHES)						
	A	B	C	D	E	F	R
4	4	3-1/16	1	1-5/16	3/8	8	1/4
5	5	3-13/16	1-1/4	1-5/8	7/16	9-1/2	1/4
6	6	4-5/8	1-1/2	2	1/2	11	5/16
7	7	5-3/8	1-3/4	2-5/16	5/8	12-1/2	3/8
8	8	6-1/8	2	2-5/8	11/16	14	7/16
9	9	6-7/8	2-1/4	3	13/16	15-1/2	1/2
10	10	7-5/8	2-1/2	3-5/16	7/8	17	9/16
11	11	8-3/8	2-3/4	3-5/8	15/16	18-1/2	5/8
12	12	9-3/16	3	4	1-1/16	20	5/8
13	13	9-15/16	3-1/4	4-5/16	1-1/8	21-1/2	11/16
14	14	10-3/4	3-1/2	4-5/8	1-3/16	23	3/4
15	15	11-1/2	3-3/4	4-15/16	1-5/16	24-1/2	13/16
16	16	12-3/16	3-15/16	5-5/16	1-3/8	26	13/16
18	18	13-13/16	4-7/16	5-15/16	1-1/2	29	15/16
20	20	15-5/16	4-5/16	6-5/8	1-3/4	32	1
22	22	16-13/16	5-5/16	7-1/16	1-15/16	35	1-1/16
24	24	18-3/8	5-15/16	7-15/16	2-1/16	38	1-1/8

MI/2006


6-3.3 (MI)

K:-DGN-TSR-STDS-ENGLISH-SNDET-FD DA SIGNS-SB 64B E.TSR

REVISION DATE: 10/19/2006 JT

DRAWN BY:

CHECKED BY: EO

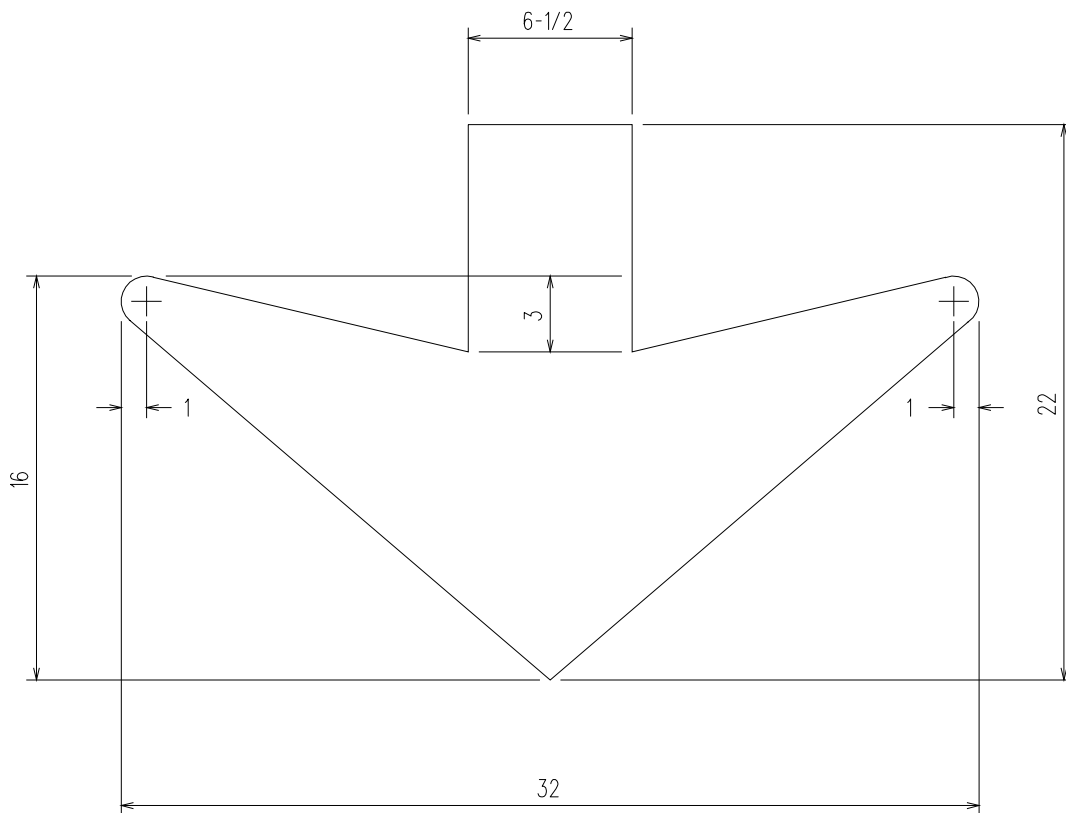

SB-64a

DOWN ARROW
OR
LANE ASSIGNMENT ARROW

MI/2006


6-3.4 (MI)

K:-DGN-TSR-STDs-ENGLISH-SNDET-FD DA SIGNS-SB 64A E.TSR

REVISION DATE: 10/19/2006 JT

DRAWN BY:

CHECKED BY: EO

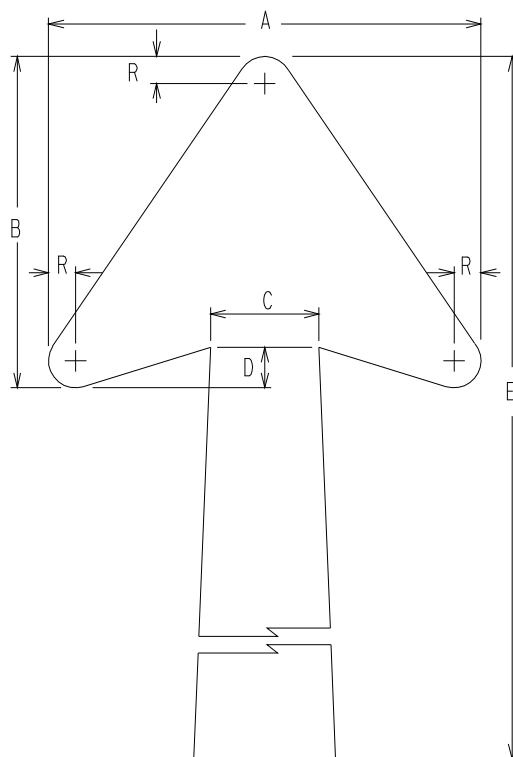

DIRECTIONAL ARROW


DIMENSIONS OF DIRECTIONAL ARROW WHEN USED WITH VARIOUS LETTER SIZES

LETTER SIZE (UPPER CASE)	ARROW DIMENSIONS IN INCHES					
	A	B	C	D	E*	R
8	8	5-1/2	1-15/16	3/4	10-14	7/16
10.67	11	7-9/16	2-5/8	1	14-19	5/8
13.33	14	9-5/8	3-5/16	1-1/4	17-23	3/4
16	16	11-1/16	3-13/16	1-1/2	19-26	7/8

* TAPER OF 1/2" PER ft. SHOULD BE HELD CONSTANT FOR LONGER OR SHORTER SHAFT LENGTHS.

(DIMENSIONS OF ARROWS ON GUIDE SIGNS)

MI/2006

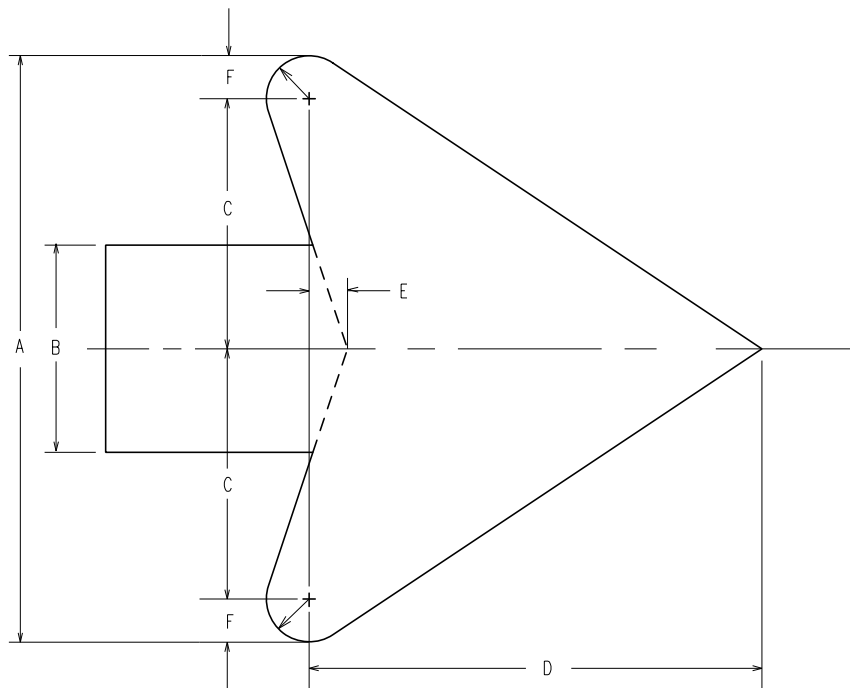

KEY


B = Variable
 C = 1.150B
 D = 2.030B
 E = 0.155B
 F = 0.200B = RADIUS

ARROW 'C'

ARROW NUMBER	DIMENSIONS (INCHES)					
	A	B	C	D	E	F
1	1-7/16	1/2	5/8	1-1/16	1/16	1/8
2	2-1/16	3/4	7/8	1-9/16	1/8	3/16
3	2-3/4	1	1-3/16	2-1/16	3/16	3/16
4	4-3/16	1-1/2	1-3/4	3-1/16	1/4	5/16
5	5-7/16	2	2-5/16	4-1/16	5/16	3/8
6	6	2-1/4	2-9/16	4-9/16	3/8	7/16
7	6-3/4	2-1/2	2-7/8	5-1/8	3/8	1/2
8	7-1/8	2-5/8	3-1/16	5-3/8	3/8	1/2
9	7-7/16	2-3/4	3-3/16	5-5/8	7/16	9/16
10	8-1/16	3	3-7/16	6-1/16	1/2	5/8

ARROW NUMBER	DIMENSIONS (INCHES)					
	A	B	C	D	E	F
11	8-1/2	3-1/8	3-5/8	6-5/16	1/2	5/8
12	8-3/4	3-1/4	3-3/4	6-9/16	1/2	5/8
13	8-15/16	3-5/16	3-13/16	6-3/4	1/2	11/16
14	9-1/2	3-1/2	4-1/16	7-3/16	9/16	3/4
15	10-1/8	3-3/4	4-5/16	7-5/8	5/8	3/4
16	10-7/8	4	4-5/8	8-1/8	5/8	13/16
17	10-15/16	4-1/16	4-11/16	8-1/4	5/8	13/16
18	11-7/16	4-1/4	4-7/8	8-5/8	5/8	13/16
19	11-3/4	4-3/8	5	8-13/16	11/16	7/8
20	12-1/4	4-1/2	5-3/16	9-3/16	3/4	15/16

ARROW NUMBER	DIMENSIONS (INCHES)					
	A	B	C	D	E	F
21	12-7/8	4-3/4	5-1/2	9-11/16	3/4	15/16
22	13-1/8	4-7/8	5-5/8	9-15/16	3/4	15/16
23	13-1/2	5	5-3/4	10-3/16	3/4	1
24	14-3/16	5-1/4	6-1/16	10-5/8	13/16	1-1/16
25	14-15/16	5-1/2	6-3/8	11-3/16	13/16	1-1/8
26	15-5/8	5-3/4	6-5/8	11-11/16	7/8	1-3/16
27	16-1/4	6	6-15/16	12-3/16	15/16	1-3/16
28	17-5/8	6-1/2	7-1/2	13-1/4	1	1-5/16
29	18-7/8	7	8-1/16	14-3/16	1-1/16	1-3/8
30	20-5/16	7-1/2	8-5/8	15-1/4	1-3/16	1-1/2
31	21-5/8	8	9-3/16	16-1/4	1-1/4	1-5/8

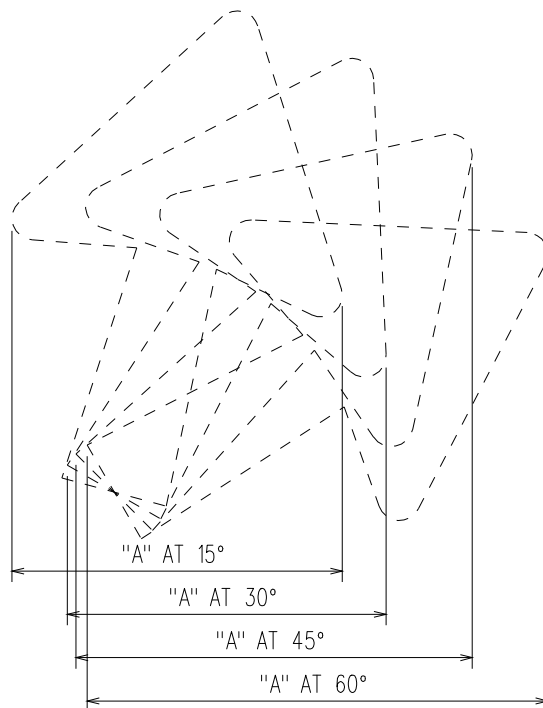


SB-69

HORIZONTAL DIMENSIONS FOR INCLINED ARROW "A"

ARROW NUMBER	DIMENSIONS "A"			
	15°	30°	45°	60°
4	3-7/8	4	4-9/16	5-3/8
5	4-7/8	4-11/16	5-1/2	6-3/8
6	5-7/8	5-1/2	6-1/2	7-1/2
7	6-3/4	6-5/16	7-1/4	8-1/2
8	7-3/4	7-1/16	8-1/4	9-5/8
9	8-3/4	7-7/8	9-1/4	10-5/8
10	9-5/8	8-3/4	10-1/16	11-5/8
11	10-9/16	9-9/16	11	12-11/16
12	11-11/16	10-3/8	12	13-7/8
13	12-9/16	11-3/16	12-3/4	15-1/4
14	13-7/16	12	13-13/16	15-7/8
15	14-1/2	13	14-5/8	17
16	15-1/2	13-3/4	15-11/16	18-1/8
18	17-3/8	15-3/8	17-3/8	20-1/8
20	19-7/16	16-5/8	18-7/16	21-3/16
22	21-1/4	18-1/8	20-3/8	23-3/8
24	23-1/4	19-3/4	21-3/16	24-3/8

MI/2006

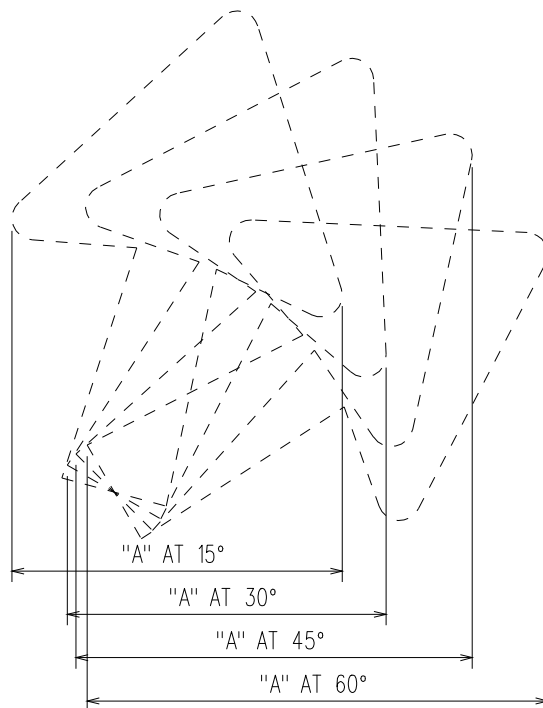


SB-69a


HORIZONTAL DIMENSIONS FOR INCLINED ARROW "B"

ARROW NUMBER	DIMENSIONS "A"			
	15°	30°	45°	60°
4	3-15/16	4-7/8	6-1/8	7-1/4
5	4-7/8	5-13/16	7-5/16	8-5/8
6	5-13/16	6-3/4	8-1/2	10
7	6-3/4	7-11/16	9-3/4	11-3/8
8	7-3/4	8-3/4	10-7/8	12-3/4
9	8-11/16	9-11/16	12-1/8	14-3/16
10	9-3/4	10-5/8	13-1/4	15-5/8
11	10-3/4	11-5/8	14-7/16	17-3/16
12	11-5/8	12-9/16	15-5/8	18-3/8
13	12-5/8	13-1/2	16-5/8	19-3/4
14	13-1/2	14-7/16	18	21-1/16
15	14-1/2	15-7/16	19-1/8	22-7/16
16	15-1/2	16-5/16	20-3/8	23-3/4
18	17-3/8	18-3/16	22-5/8	26-9/16
20	19-9/16	20-1/4	25-1/8	29-9/16
22	21-1/4	21-15/16	27-1/4	32-1/16
24	23-1/4	24-1/16	29-13/16	34-13/16


MI/2006

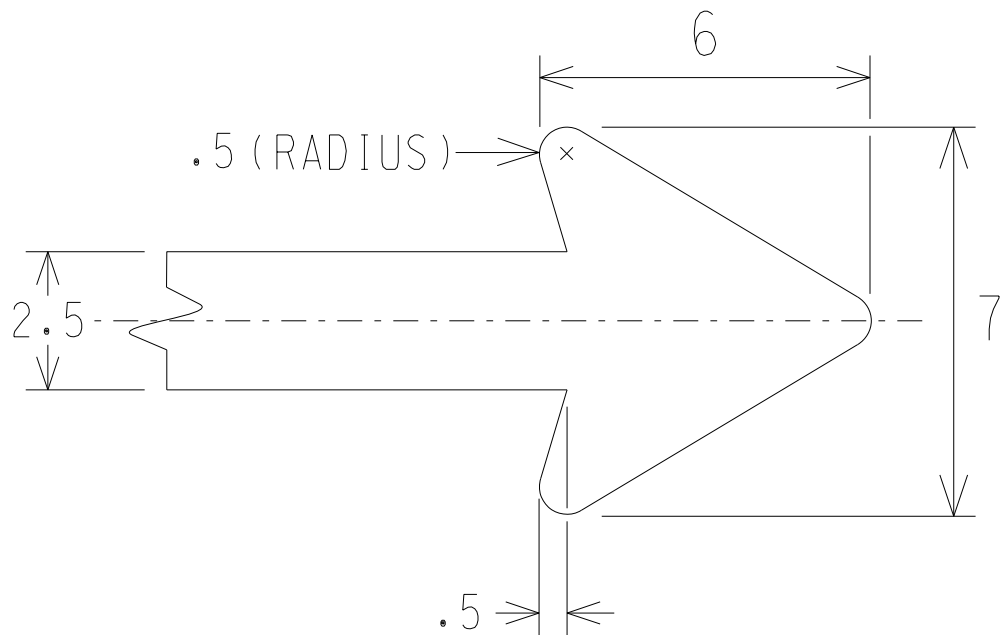

ARROWHEAD DETAIL
STANDARD ARROW FOR D6-1 SIGN

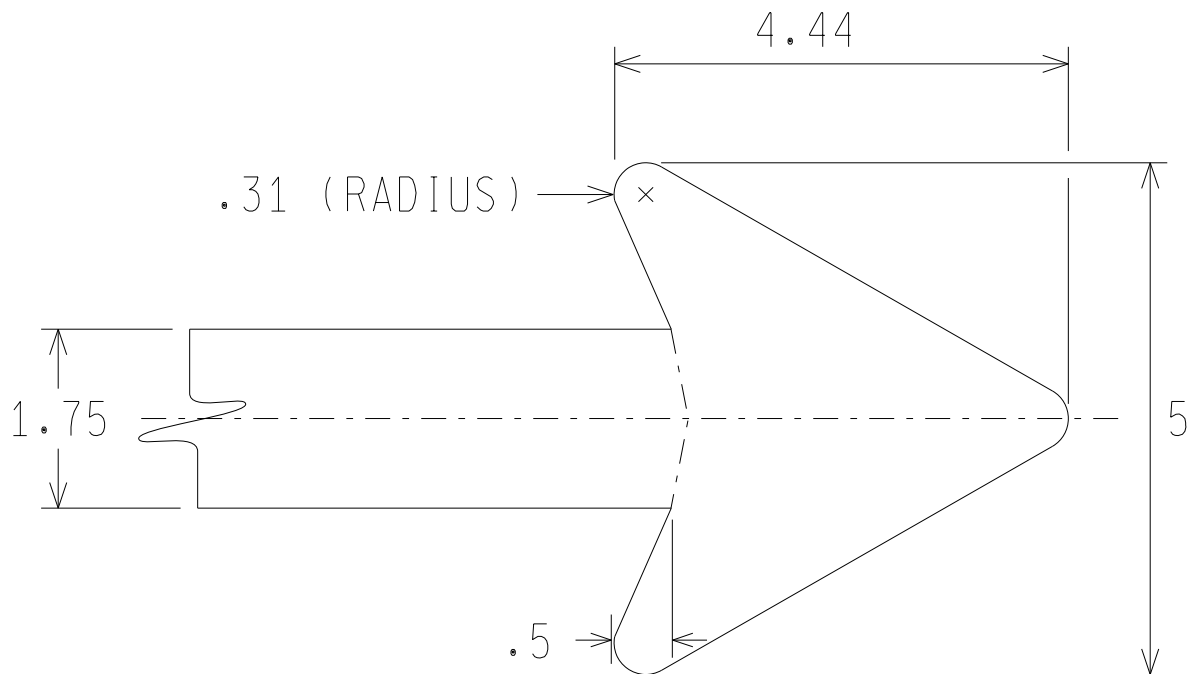


ARROWHEAD DETAIL
STANDARD ARROW FOR I-11a, I8, I10, AND I12 SERIES SIGNS

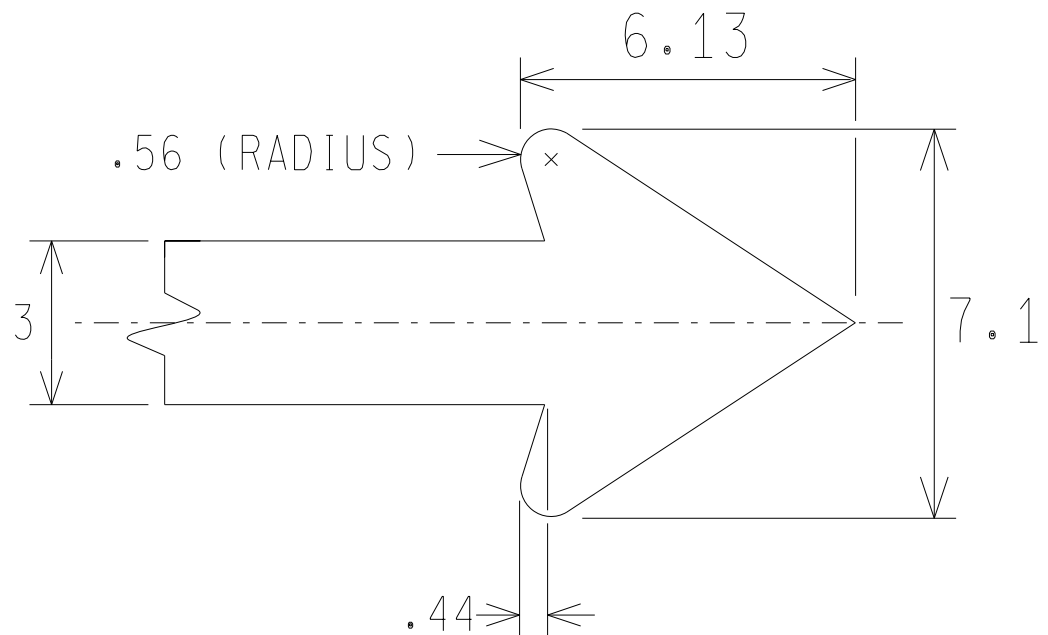


ARROWHEAD DETAIL
STANDARD ARROW FOR W6-5 SIGN


6-3.92 (M)

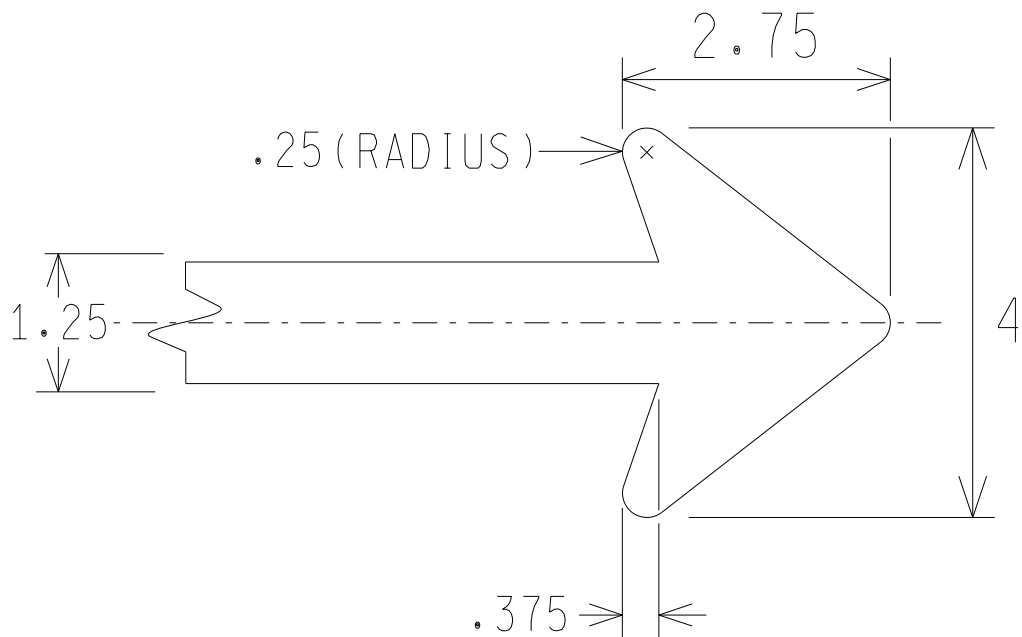



ARROWHEAD DETAIL

STANDARD ARROW FOR D4-4b, D13-8, D13-9, I9-1, I9-1a, AND I9-1b SIGNS

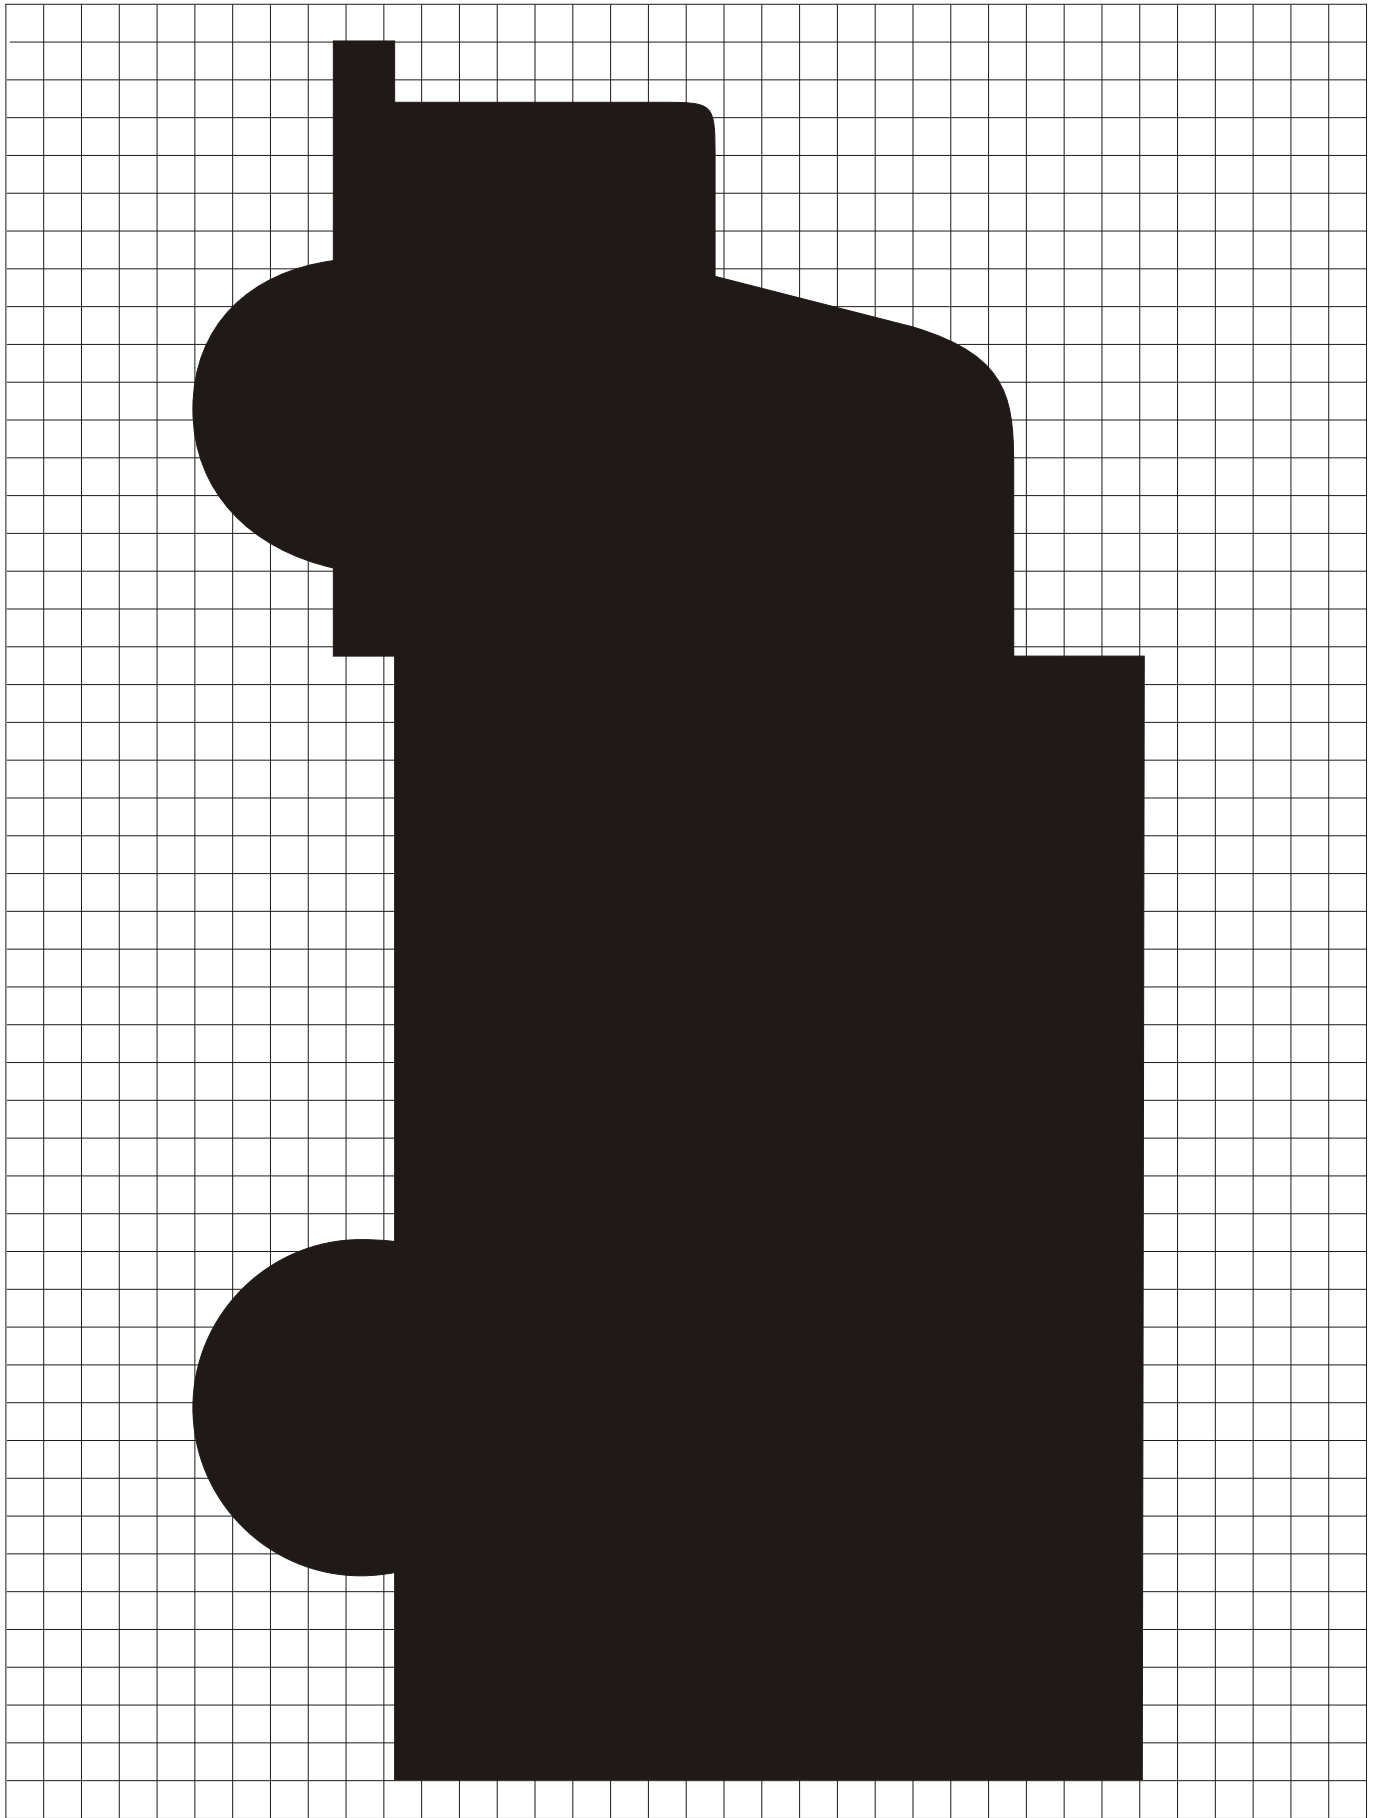

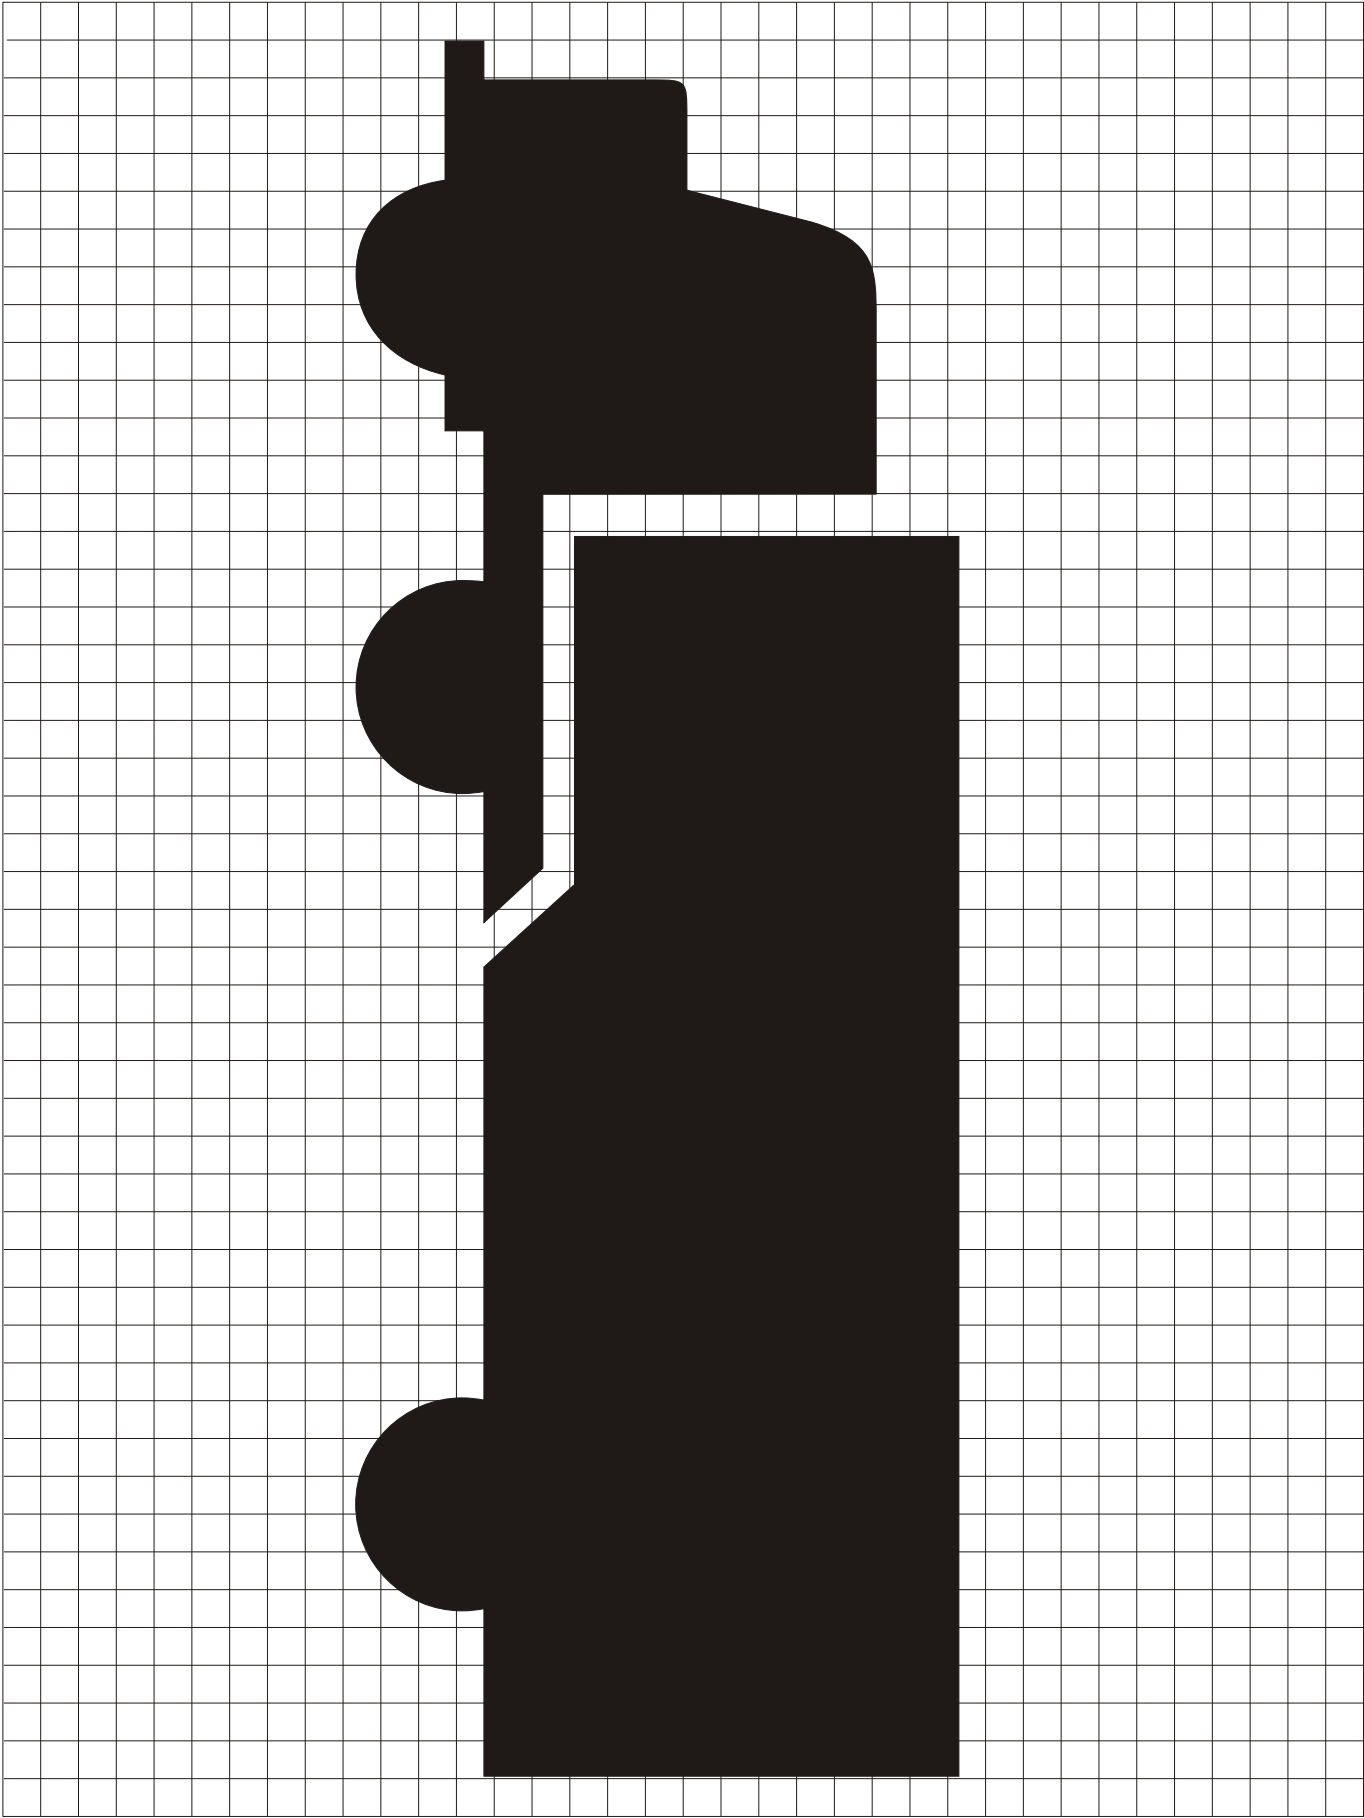


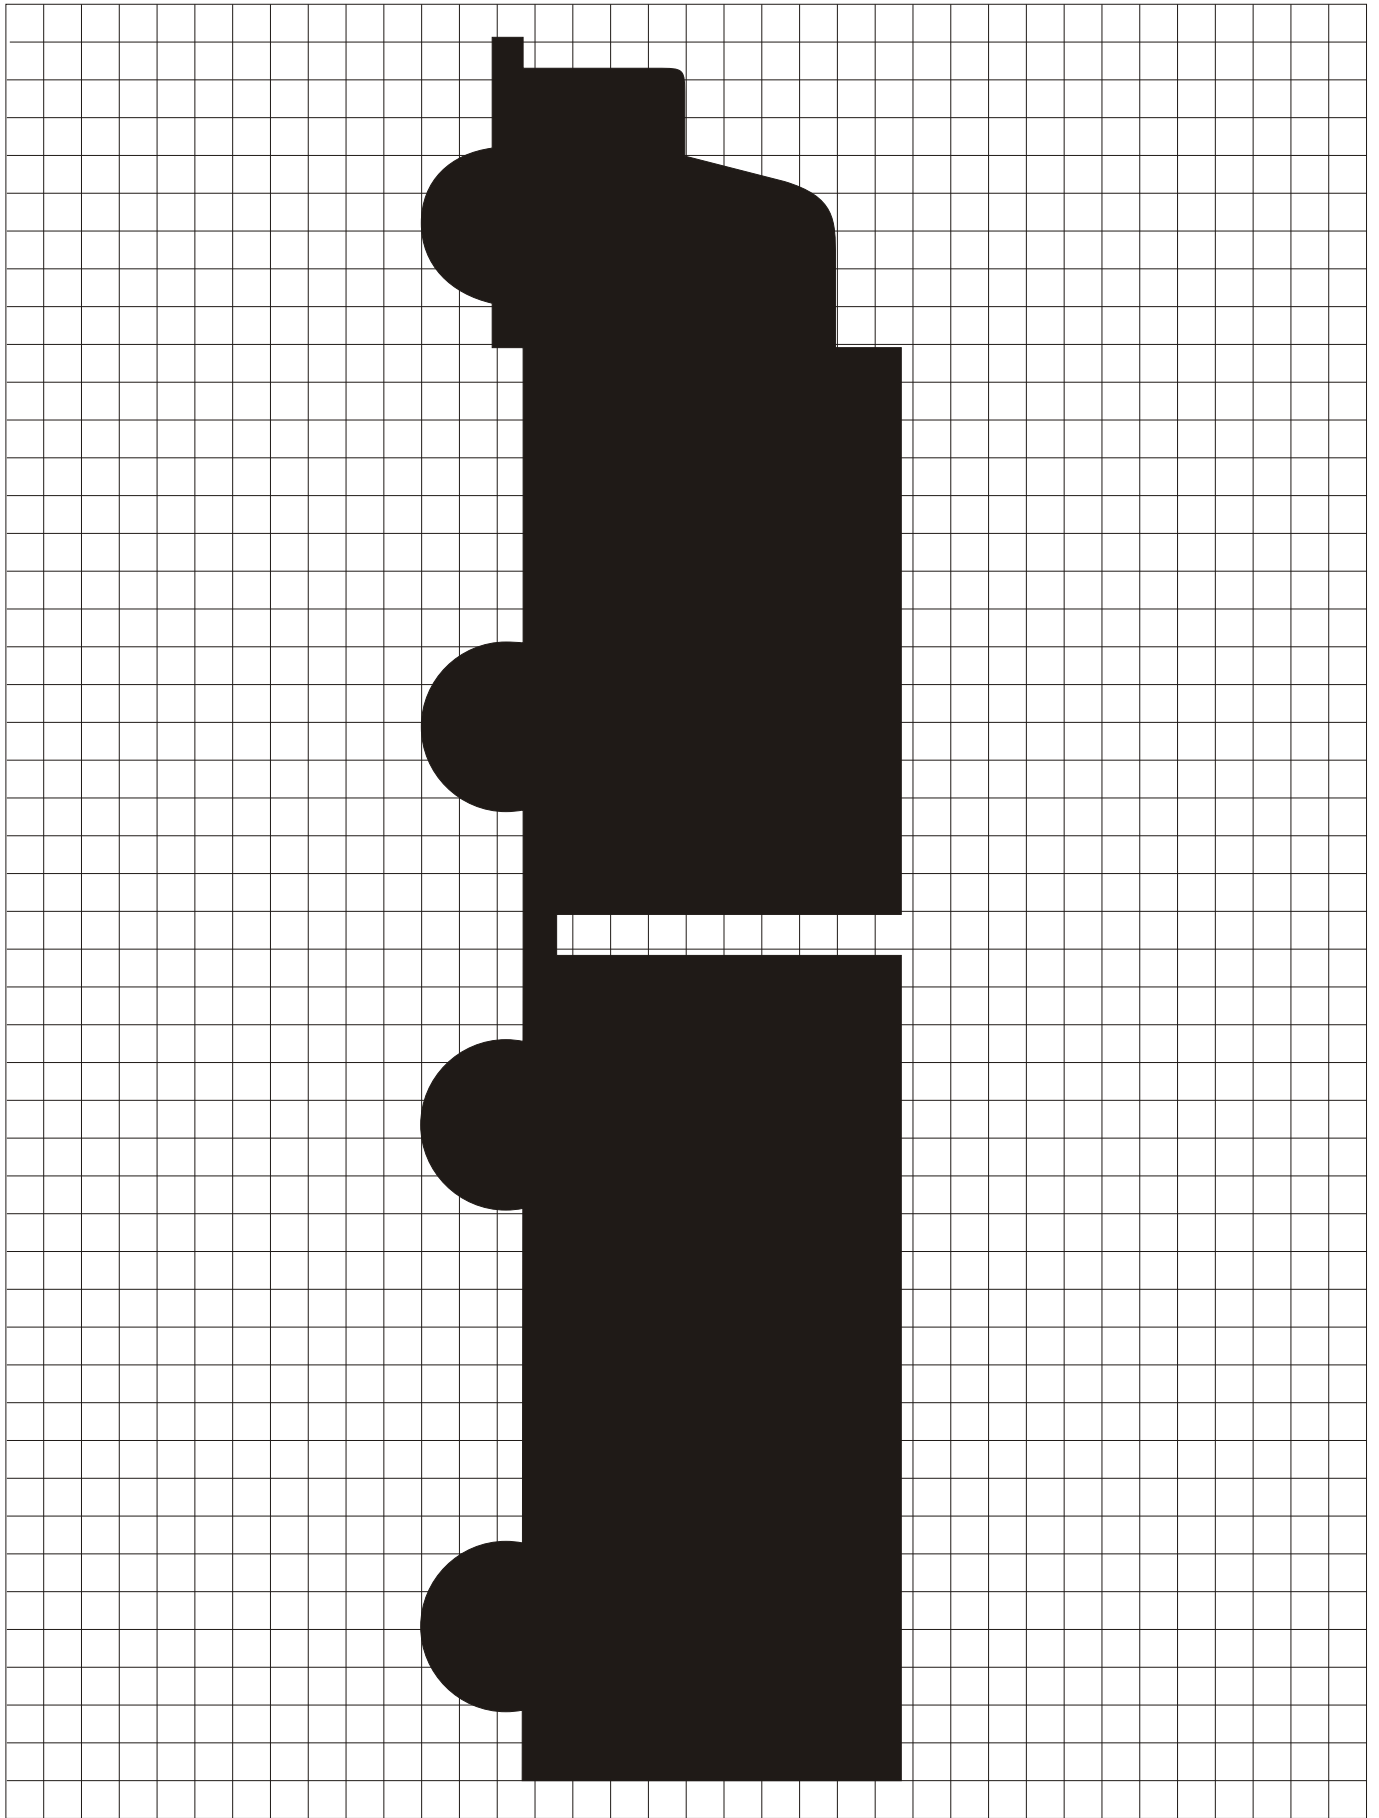


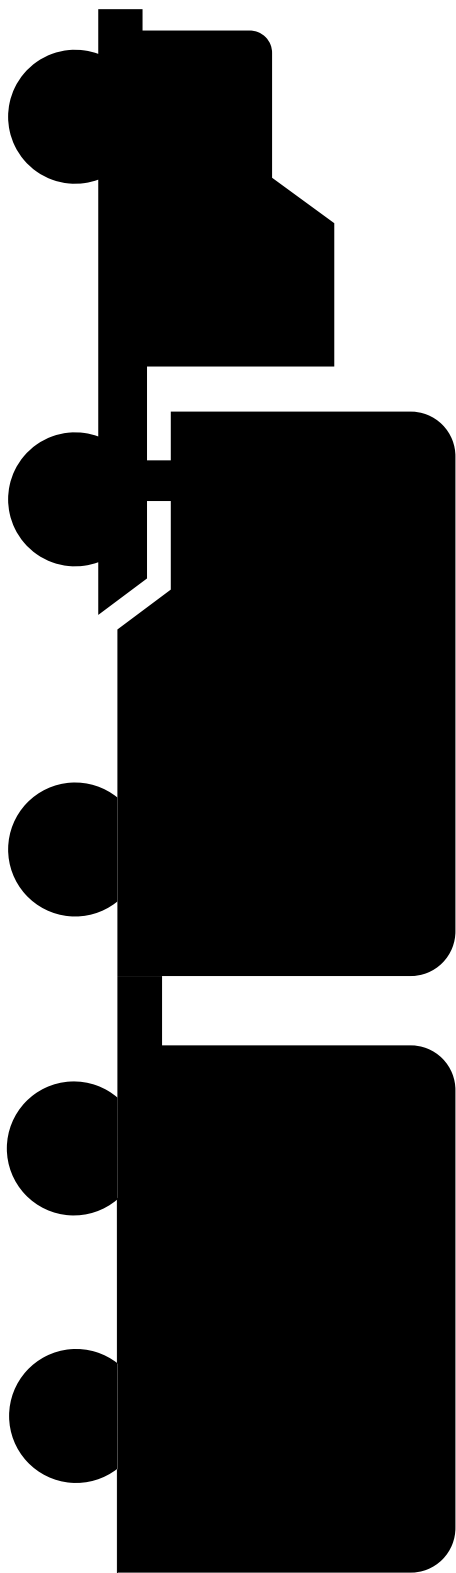

MI/2012


6-6.1

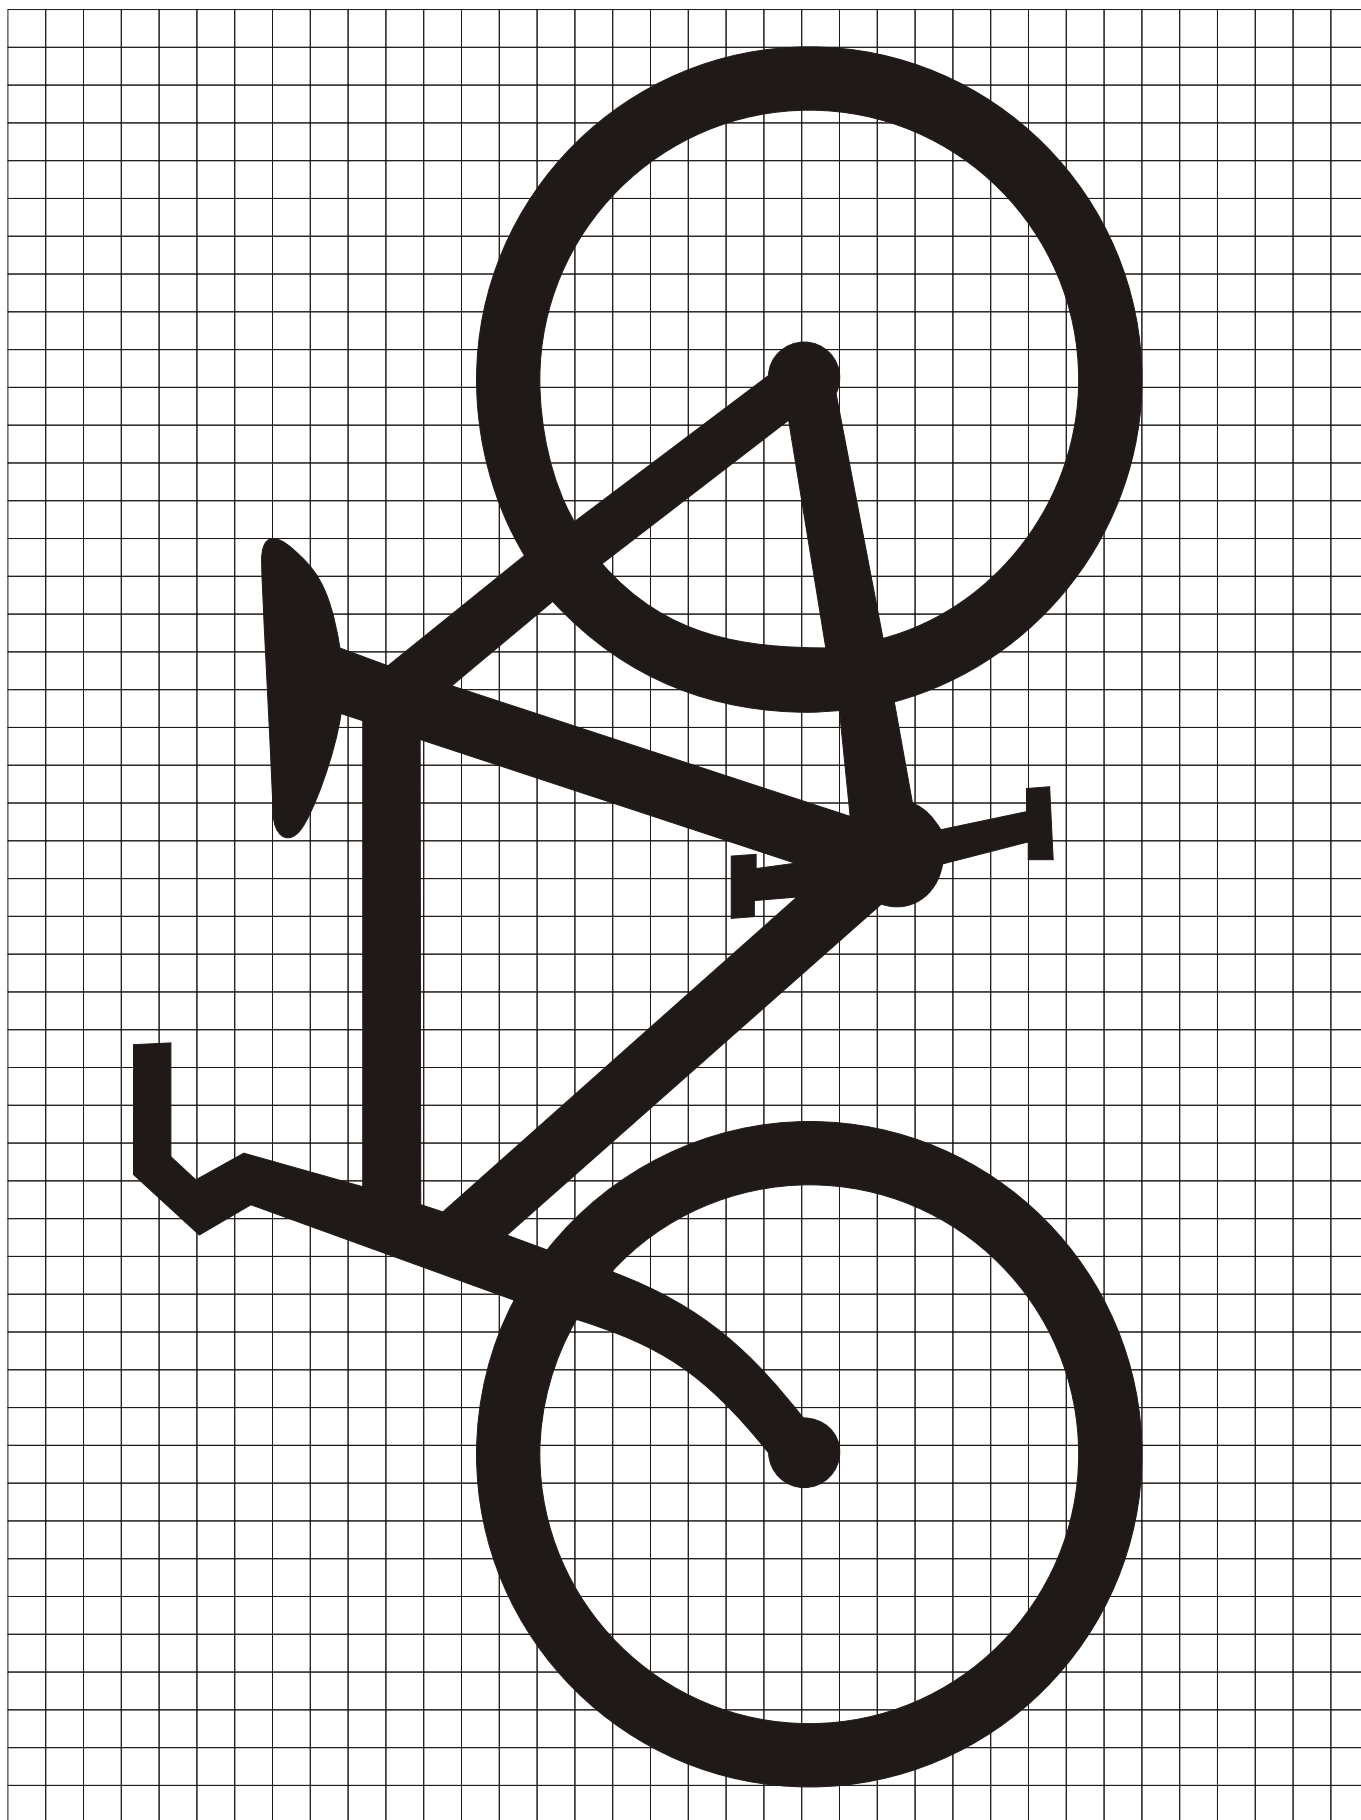


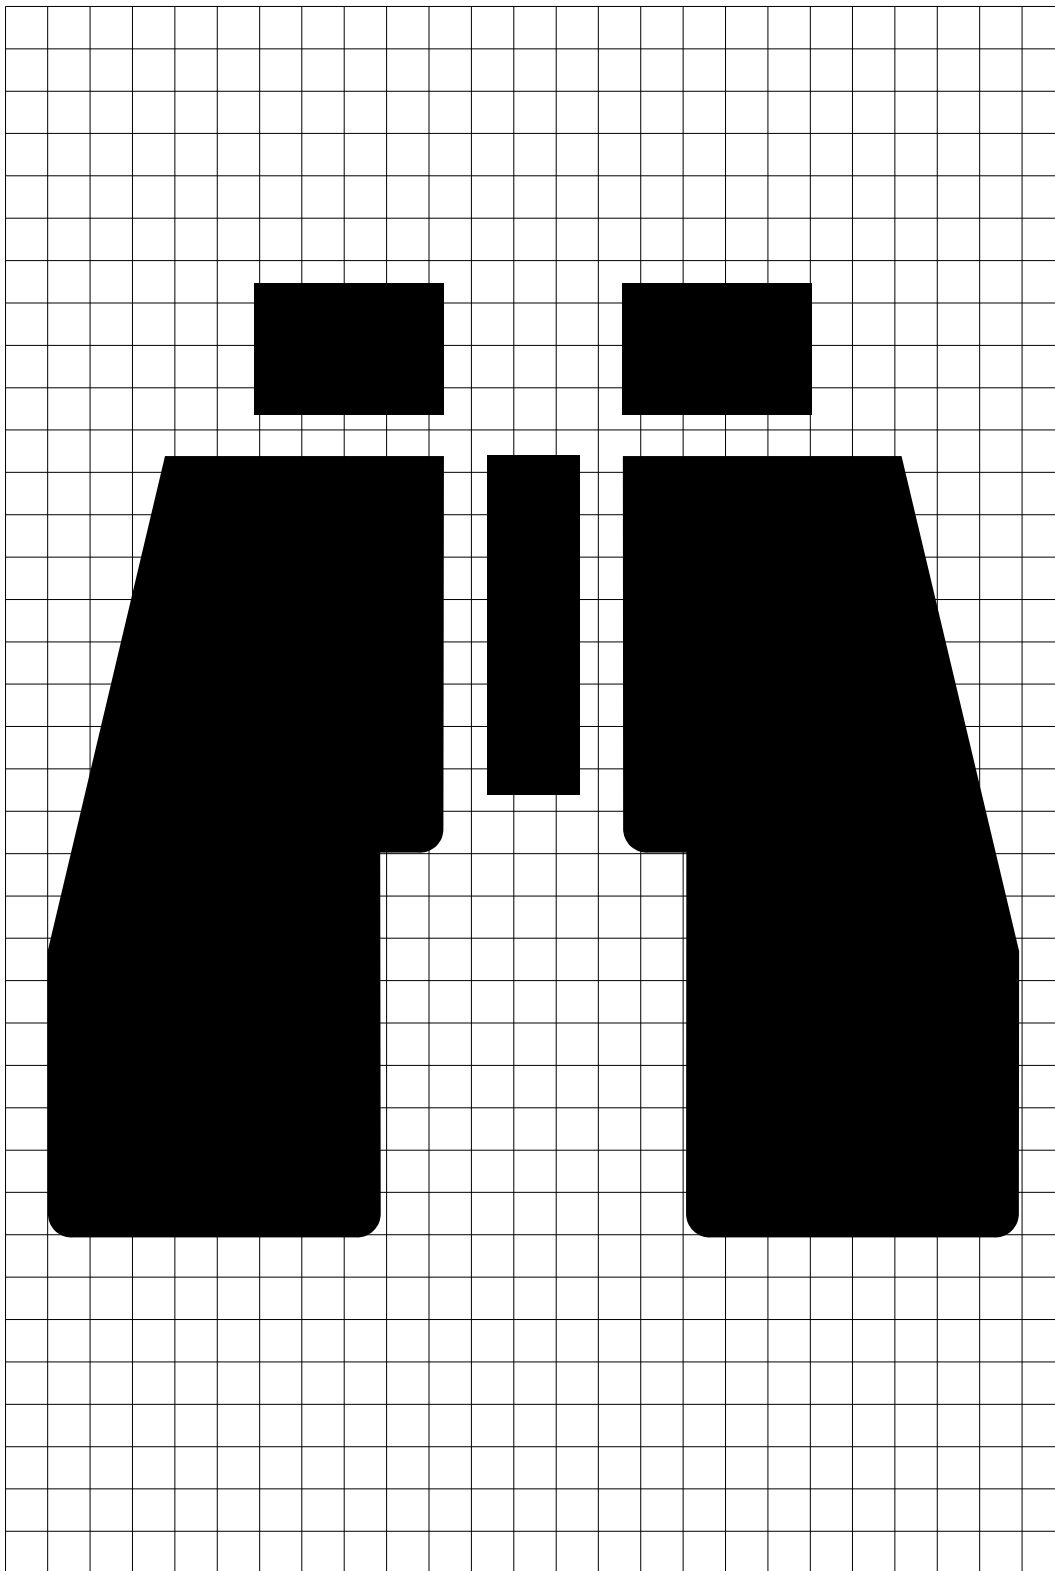



RS-076


6-7.1 (MI)

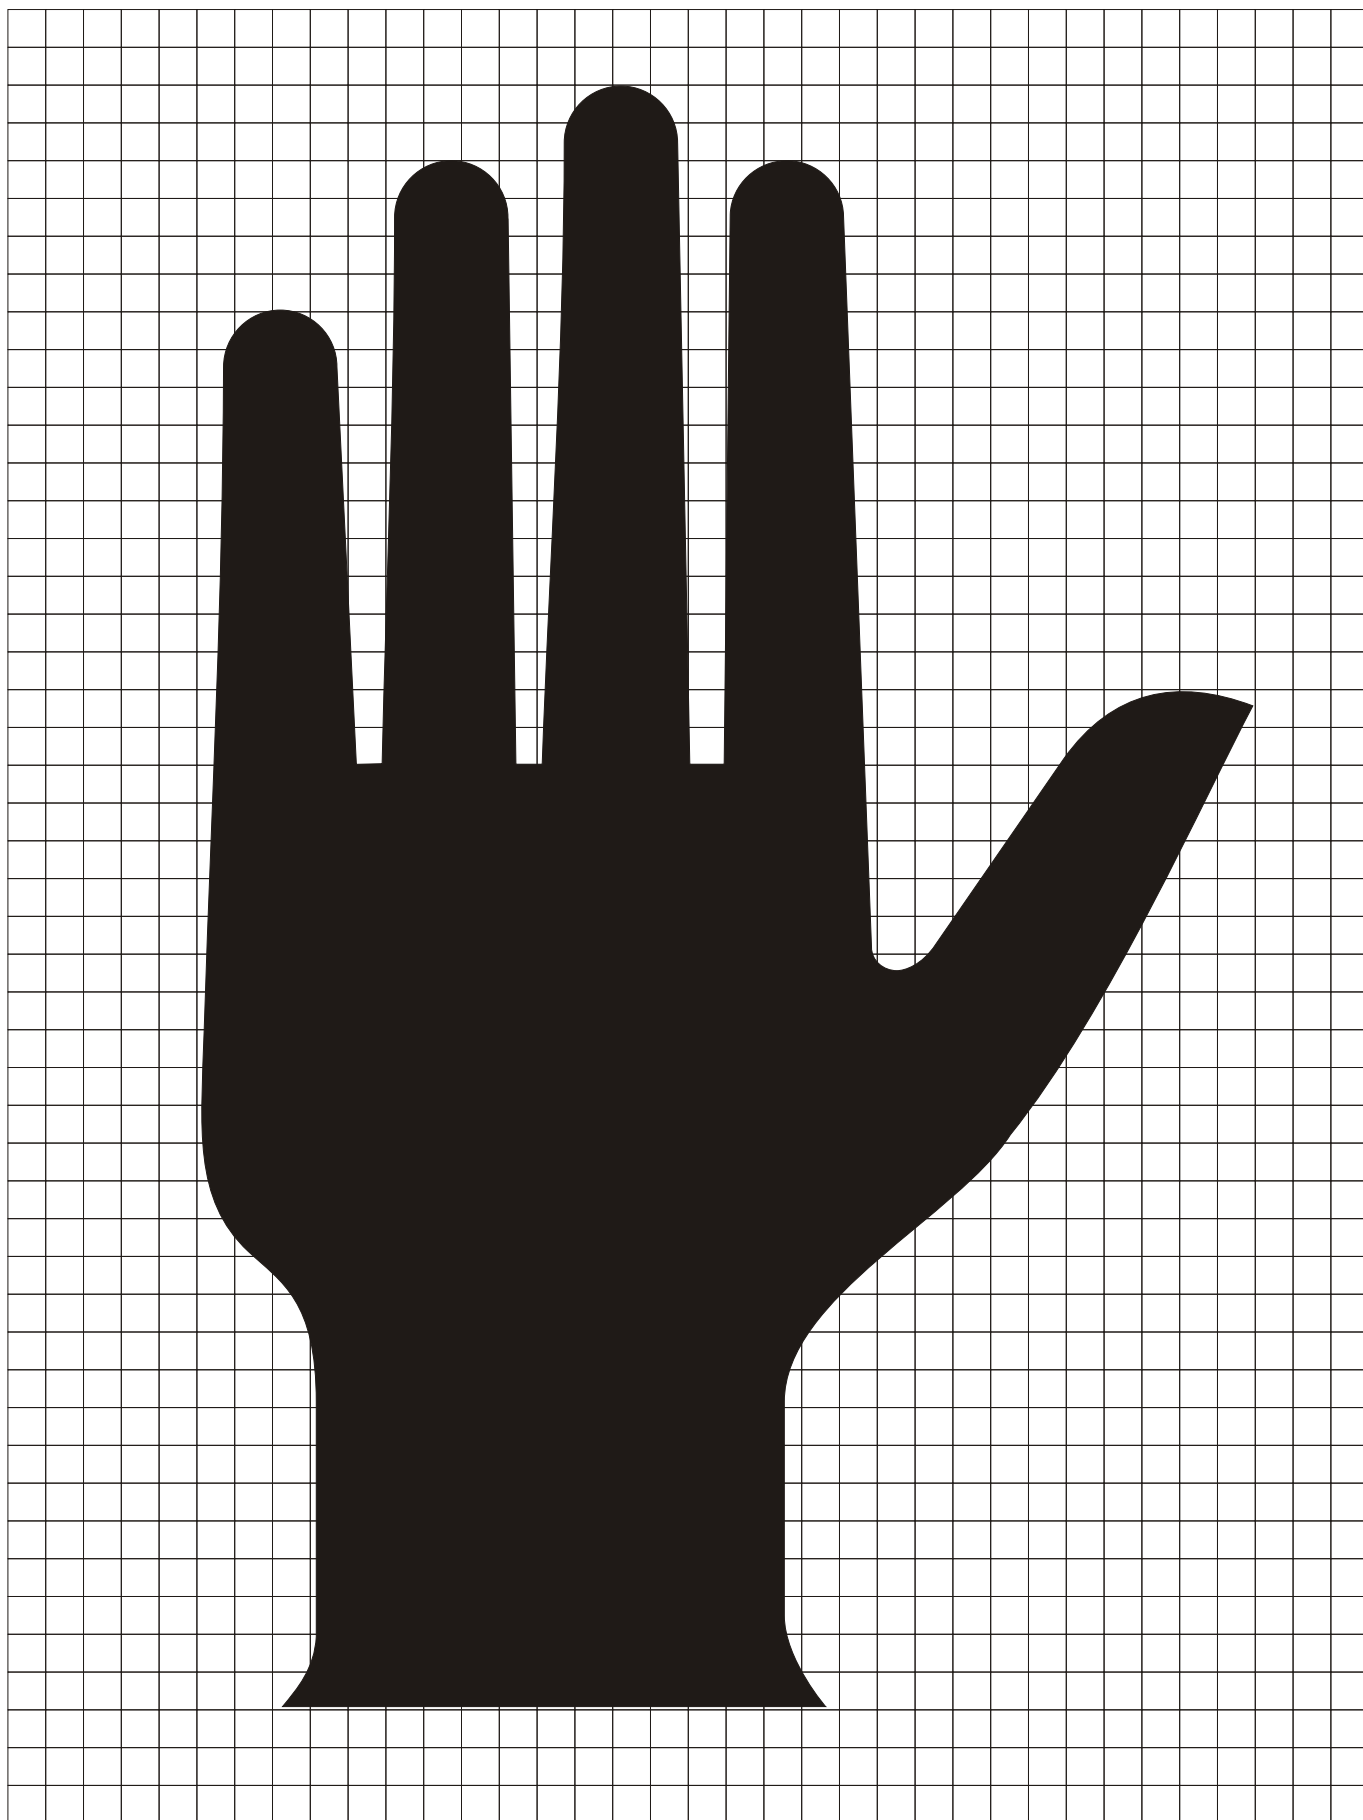

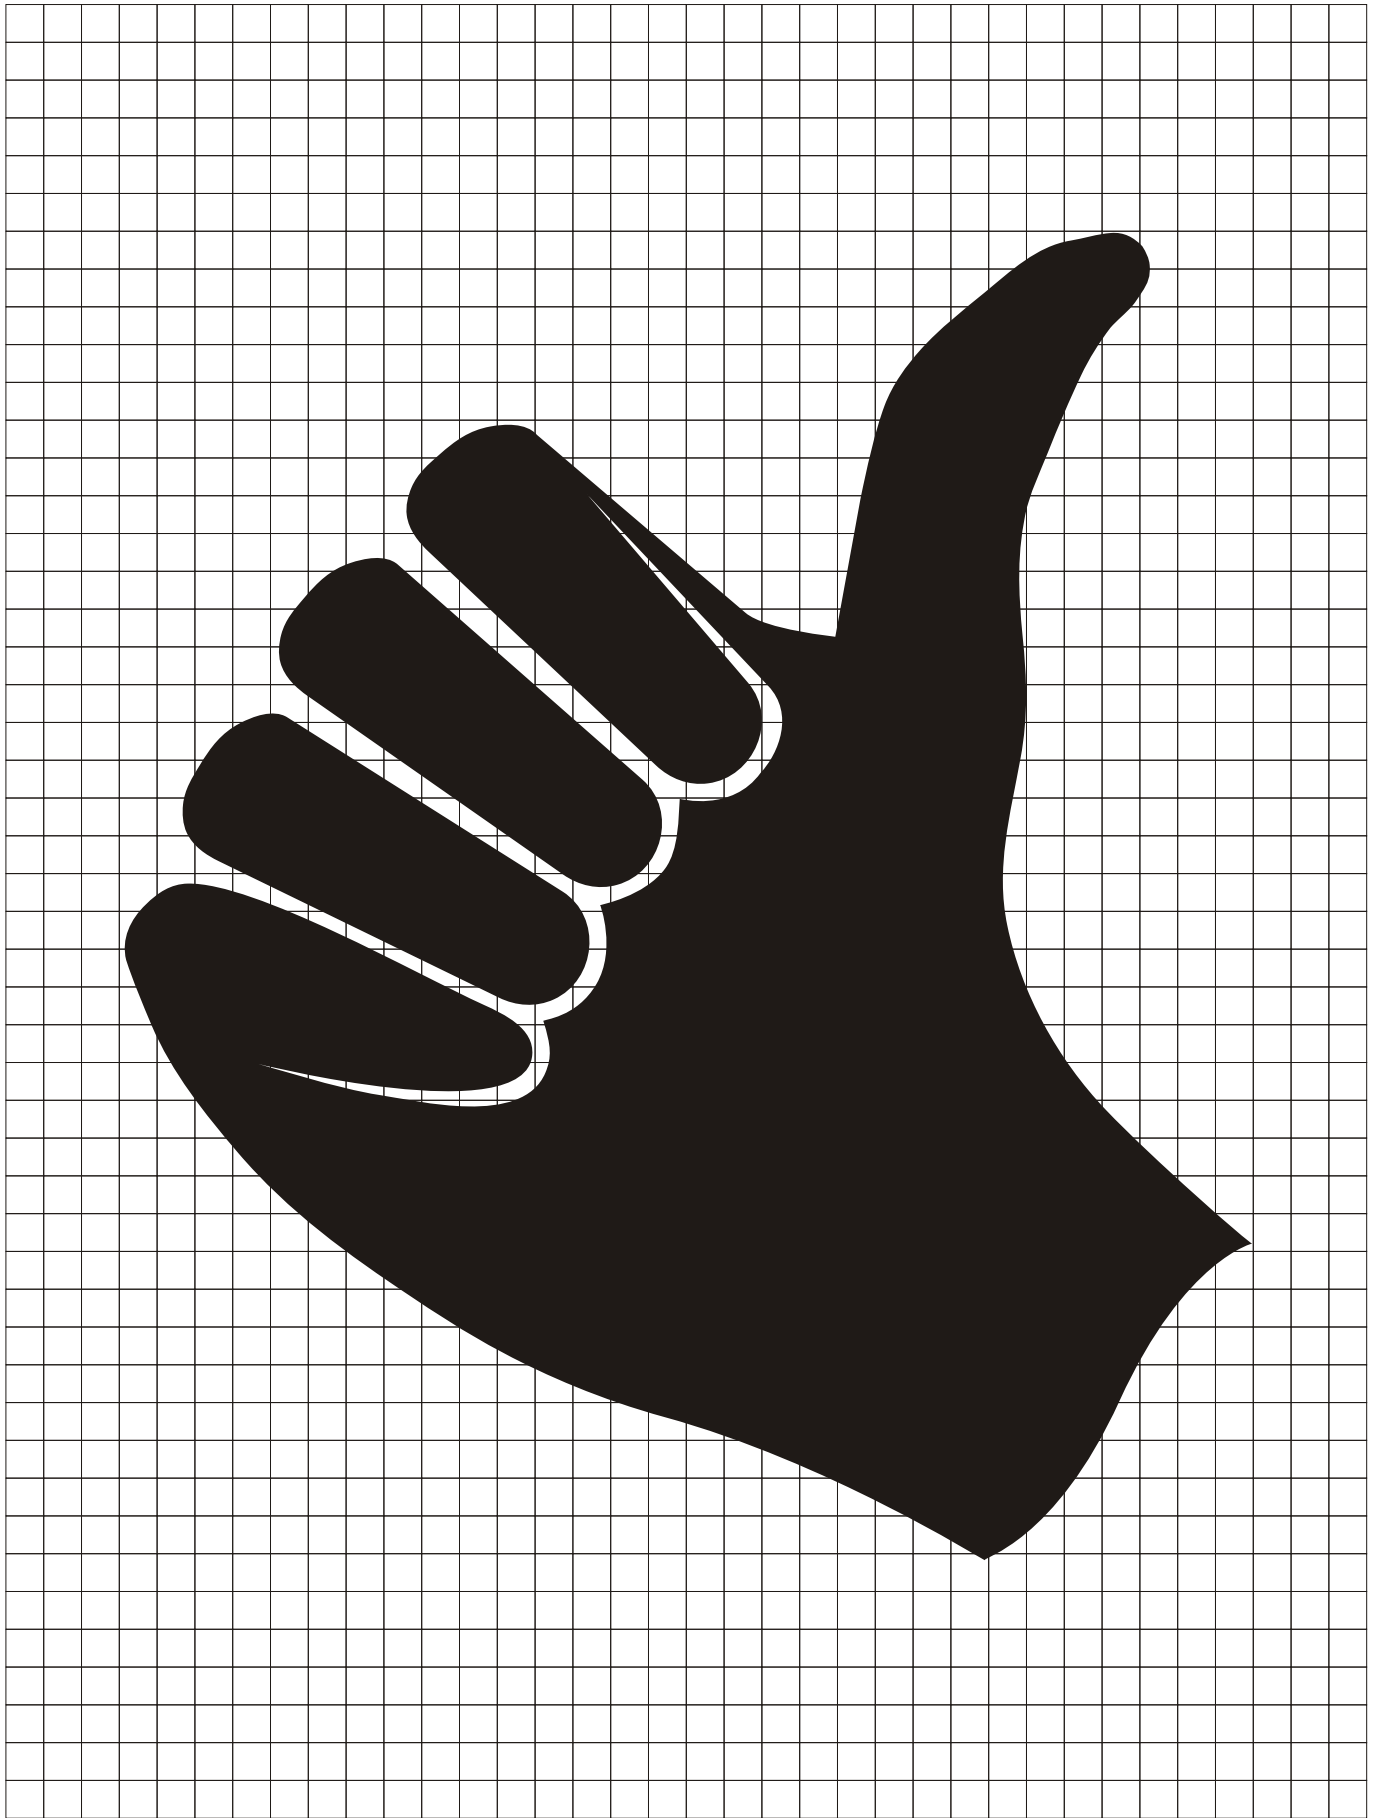


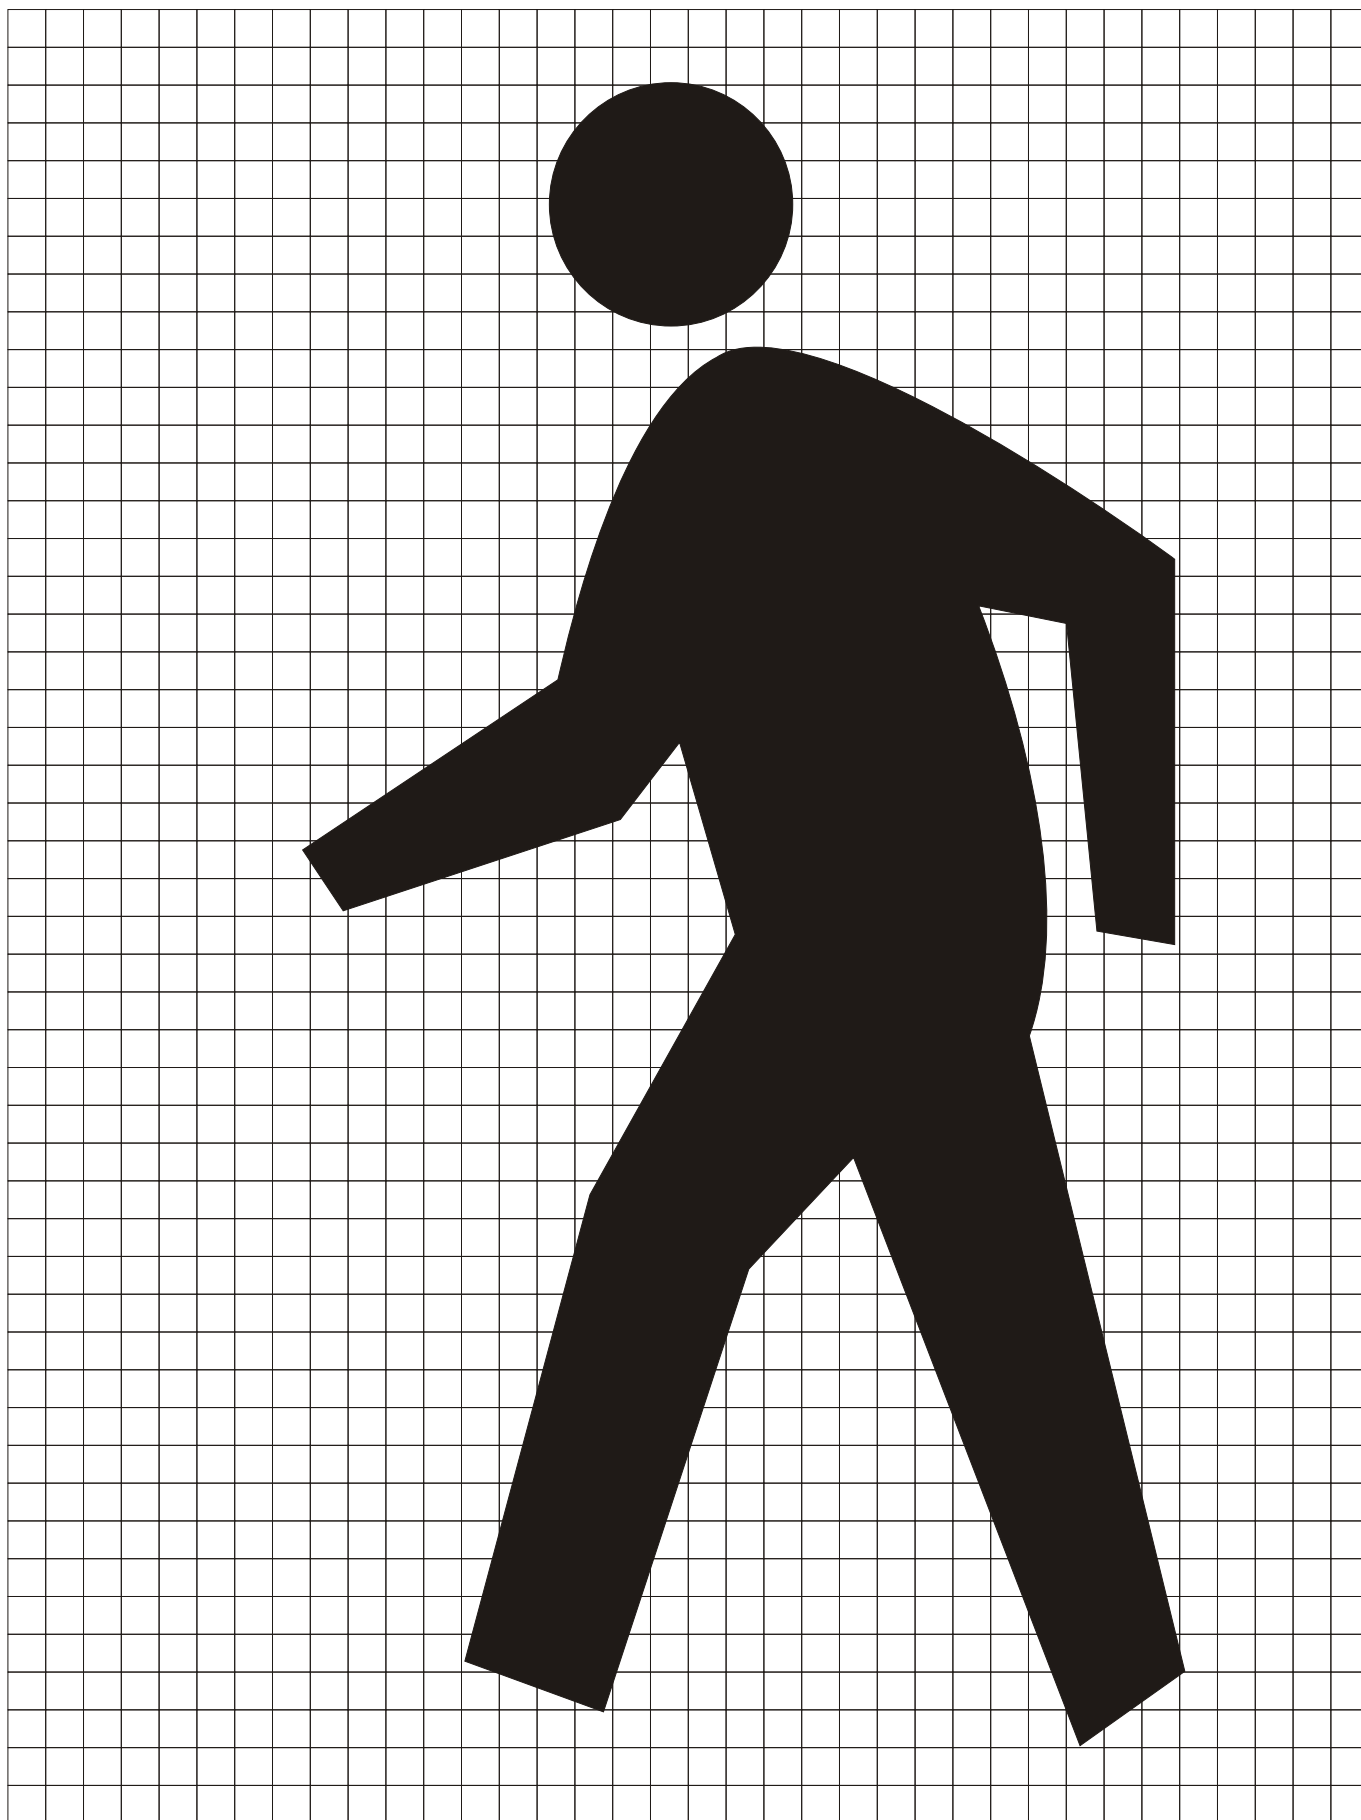


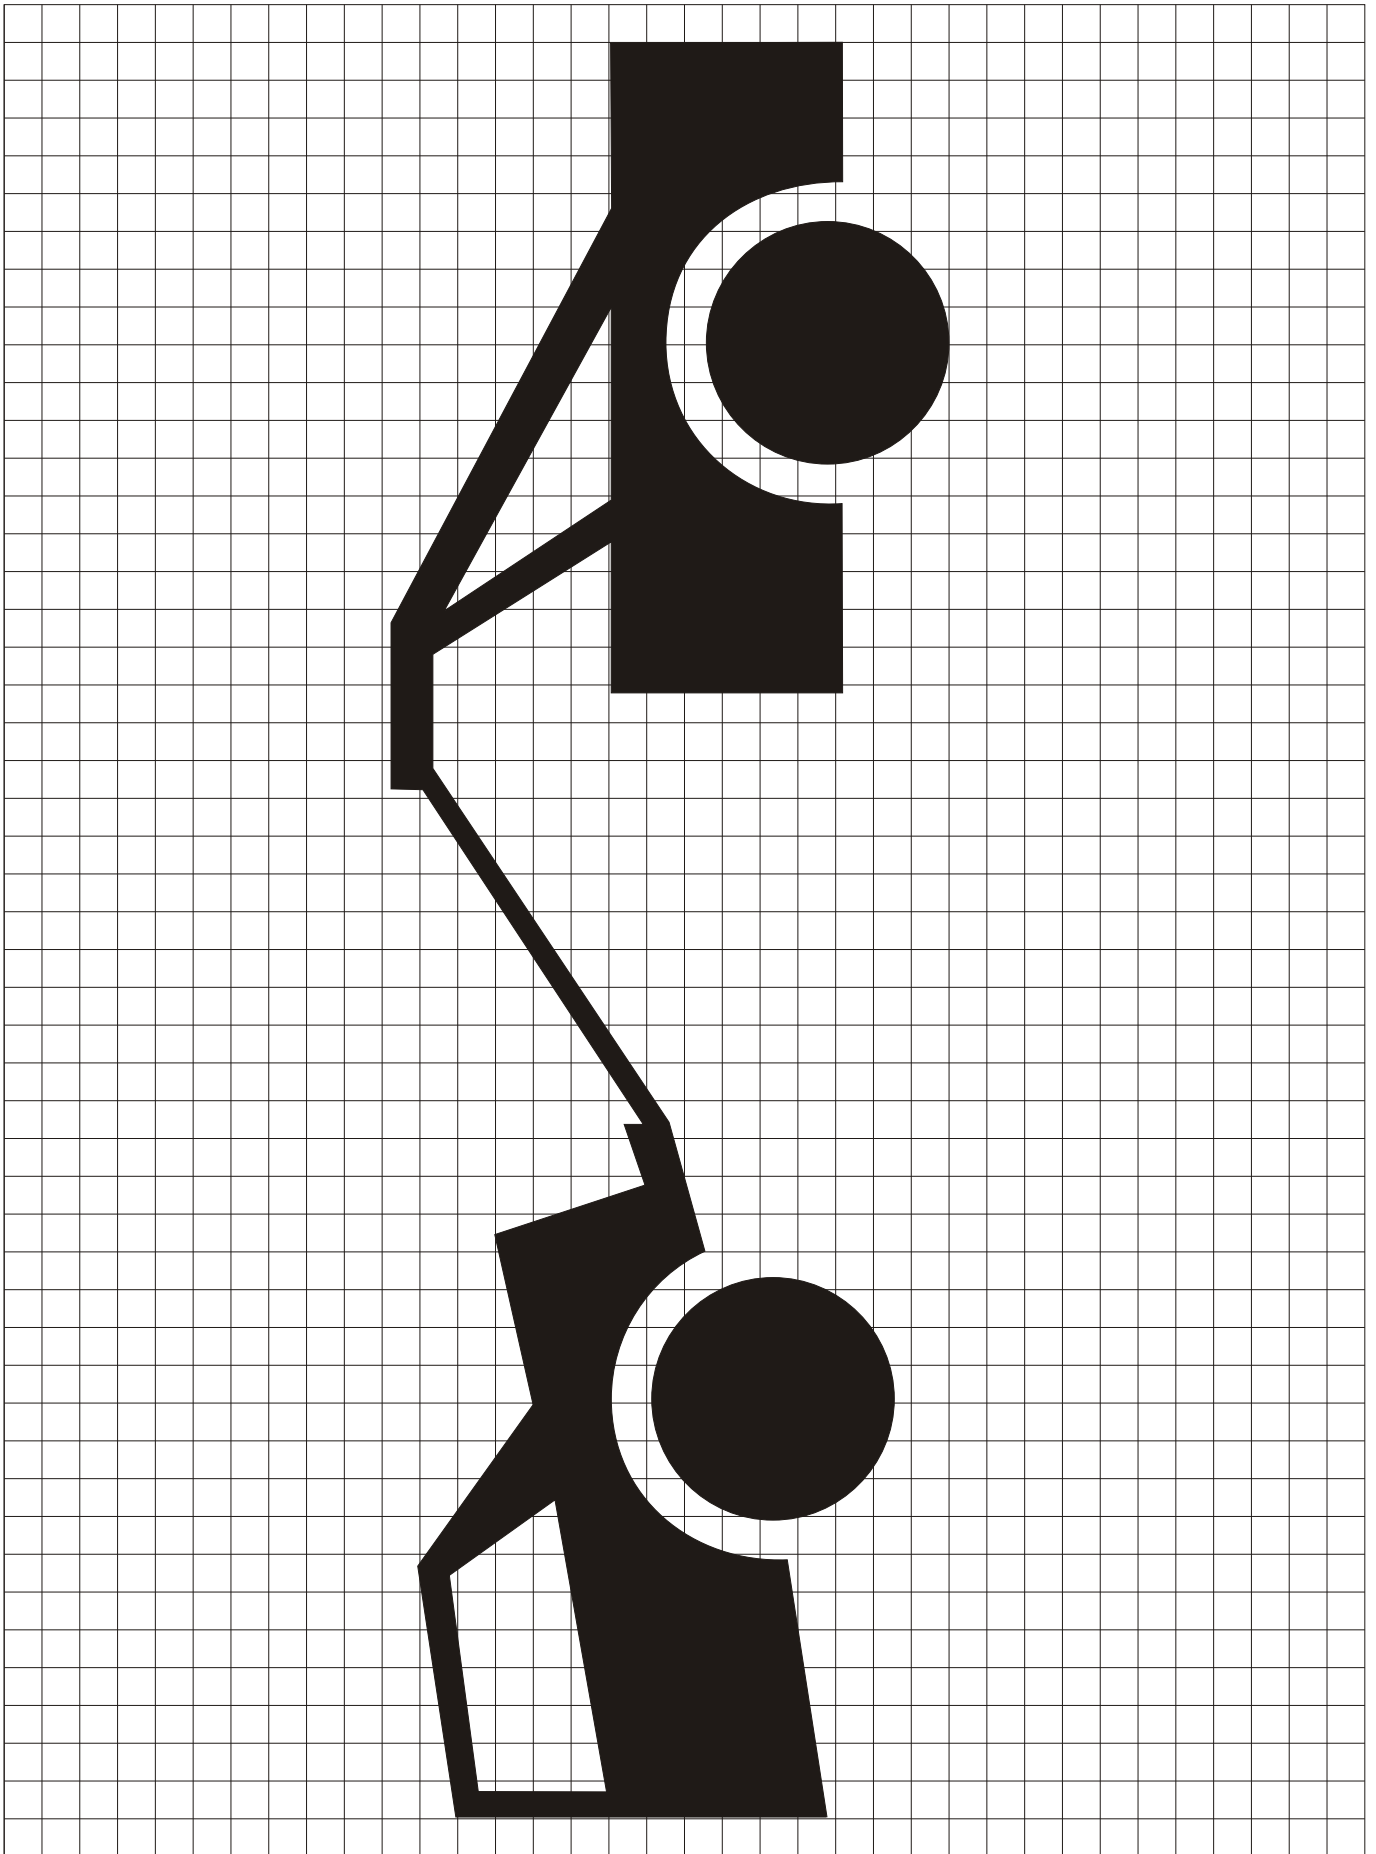


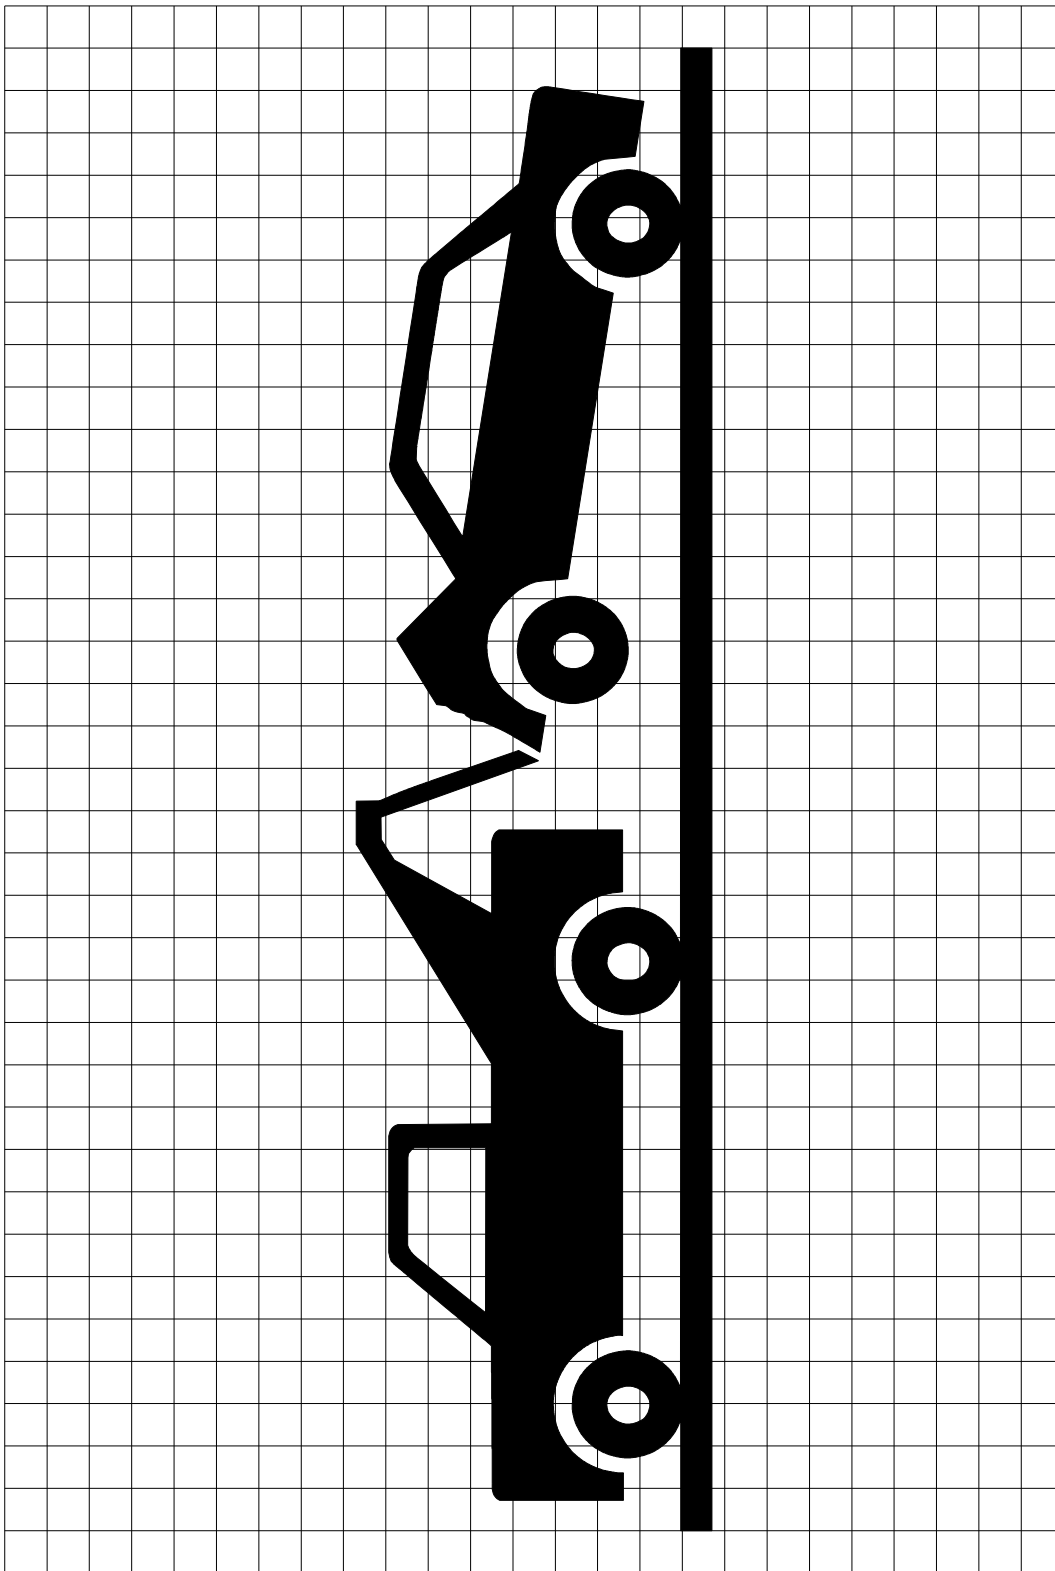


6-11.1 (MI)

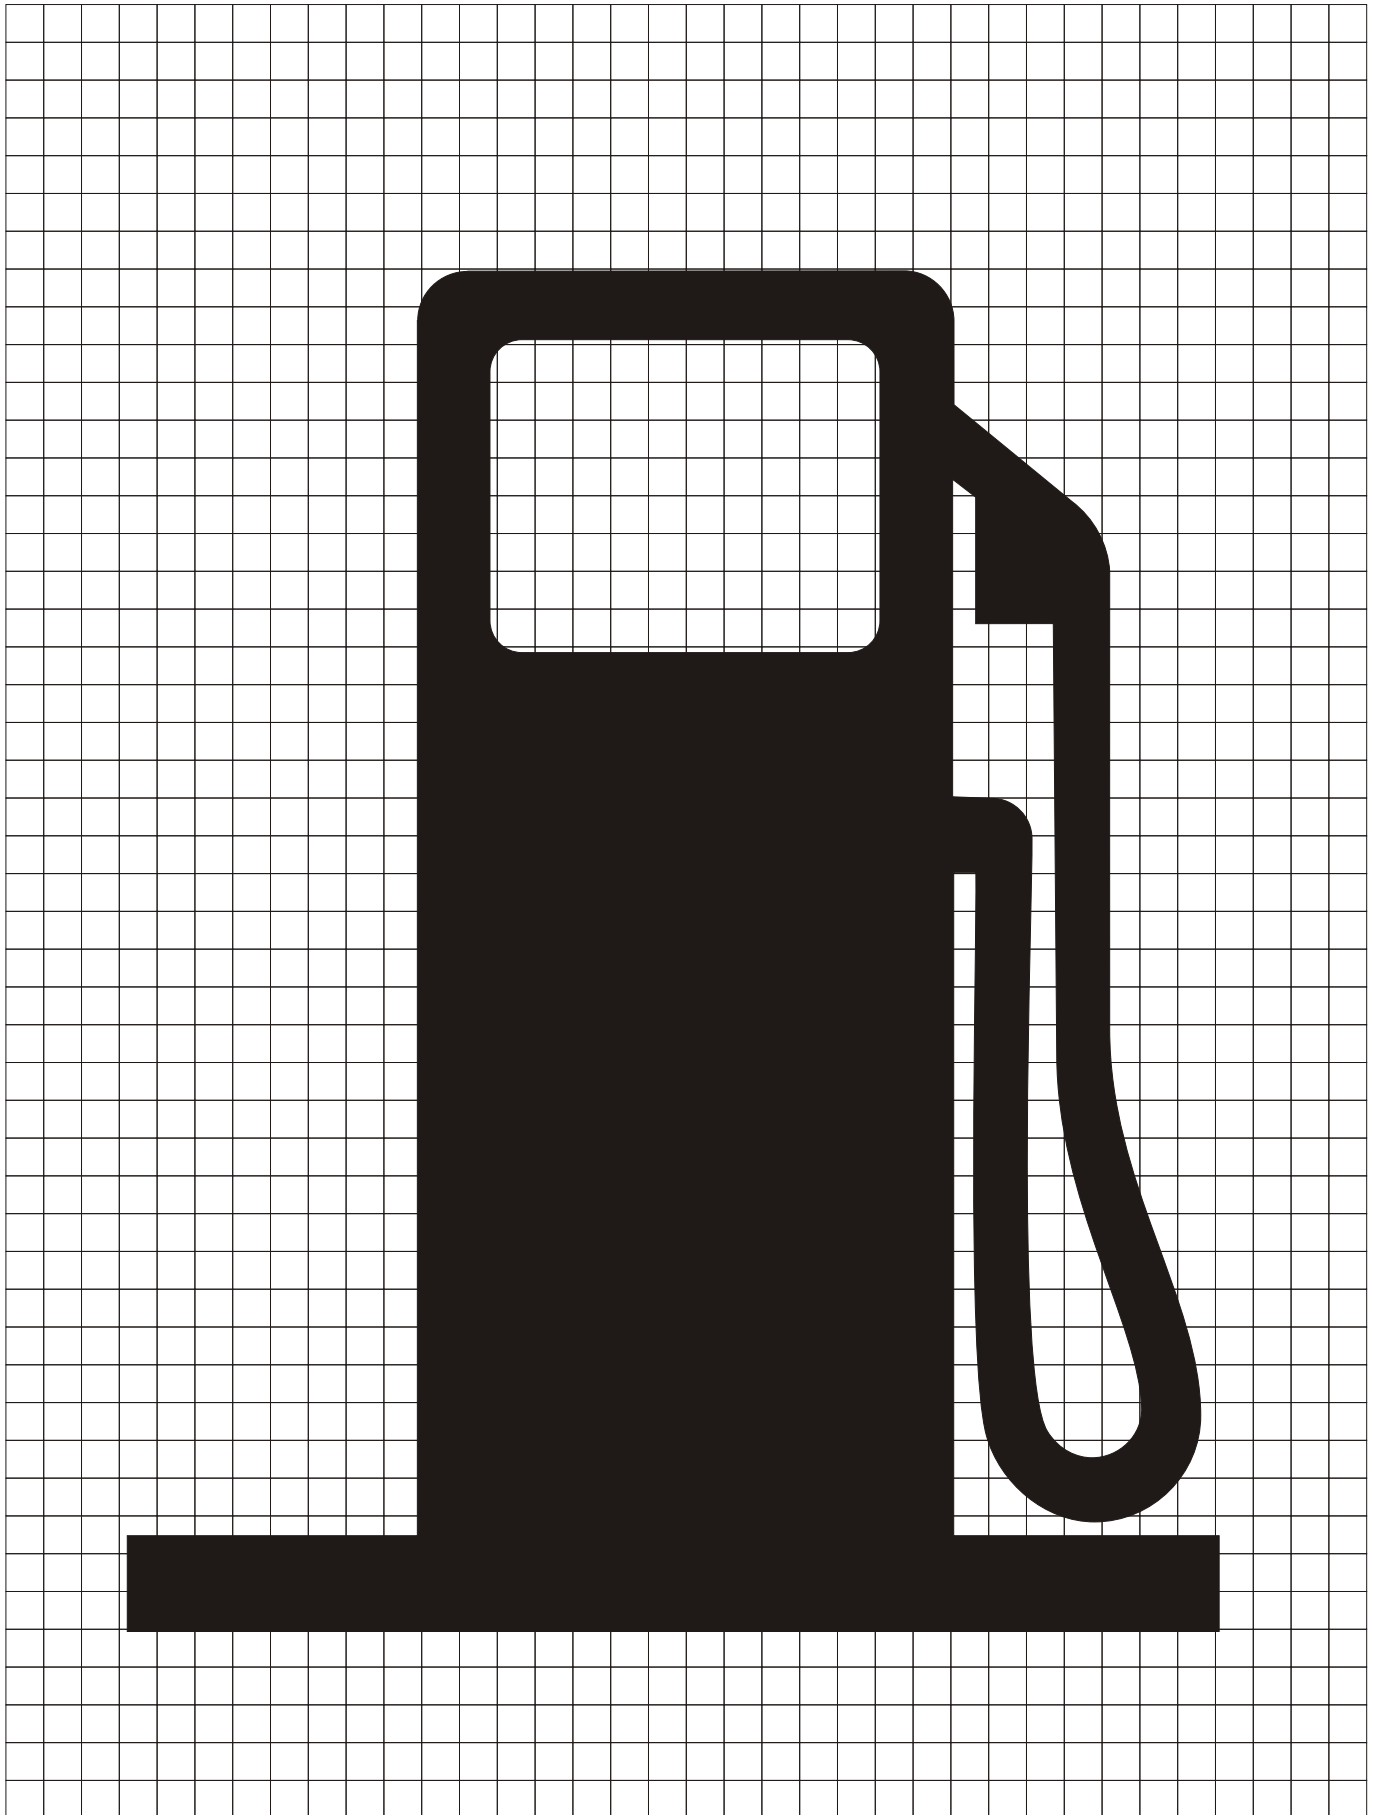


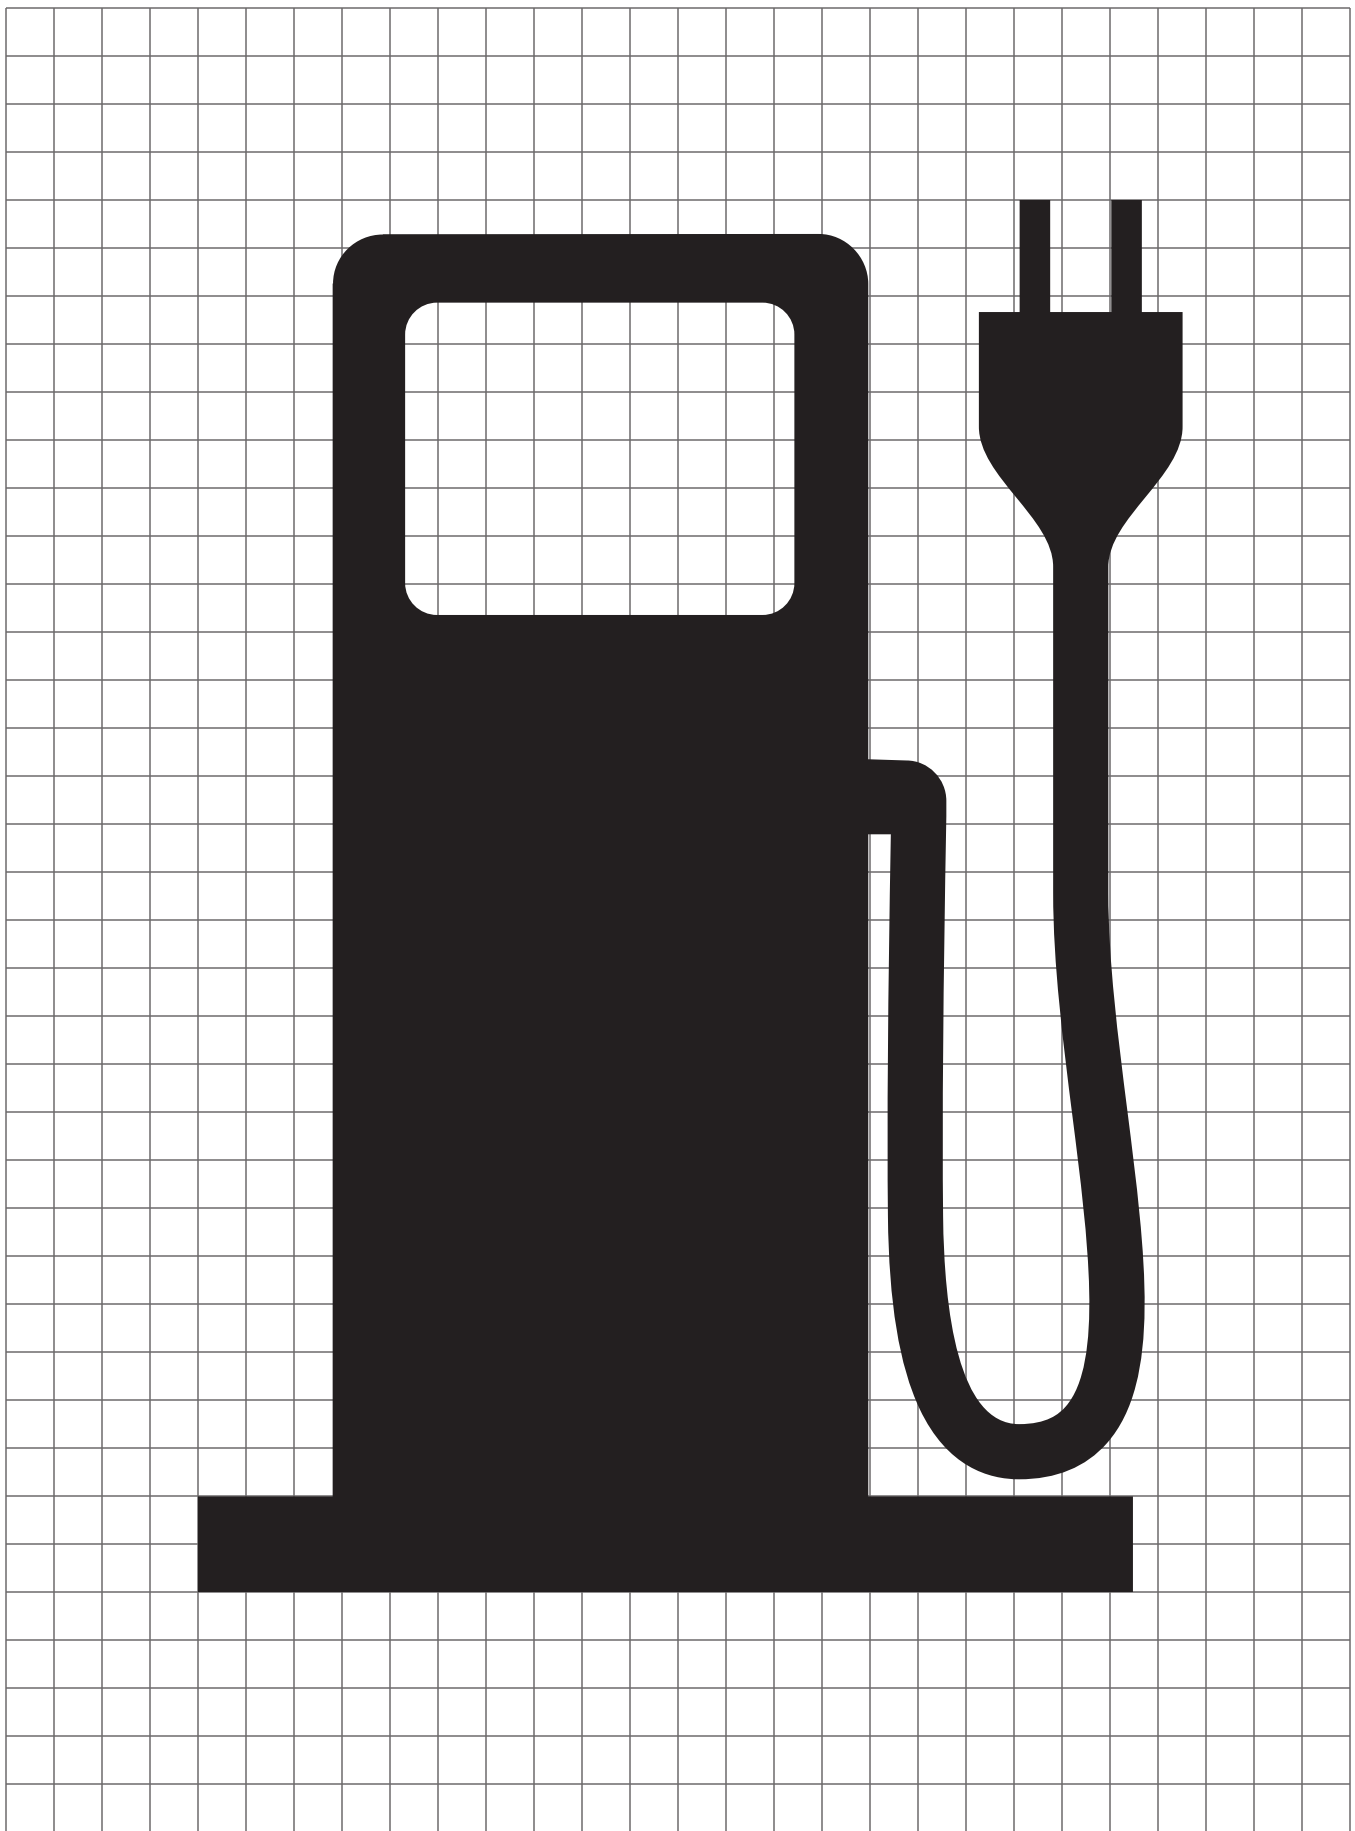



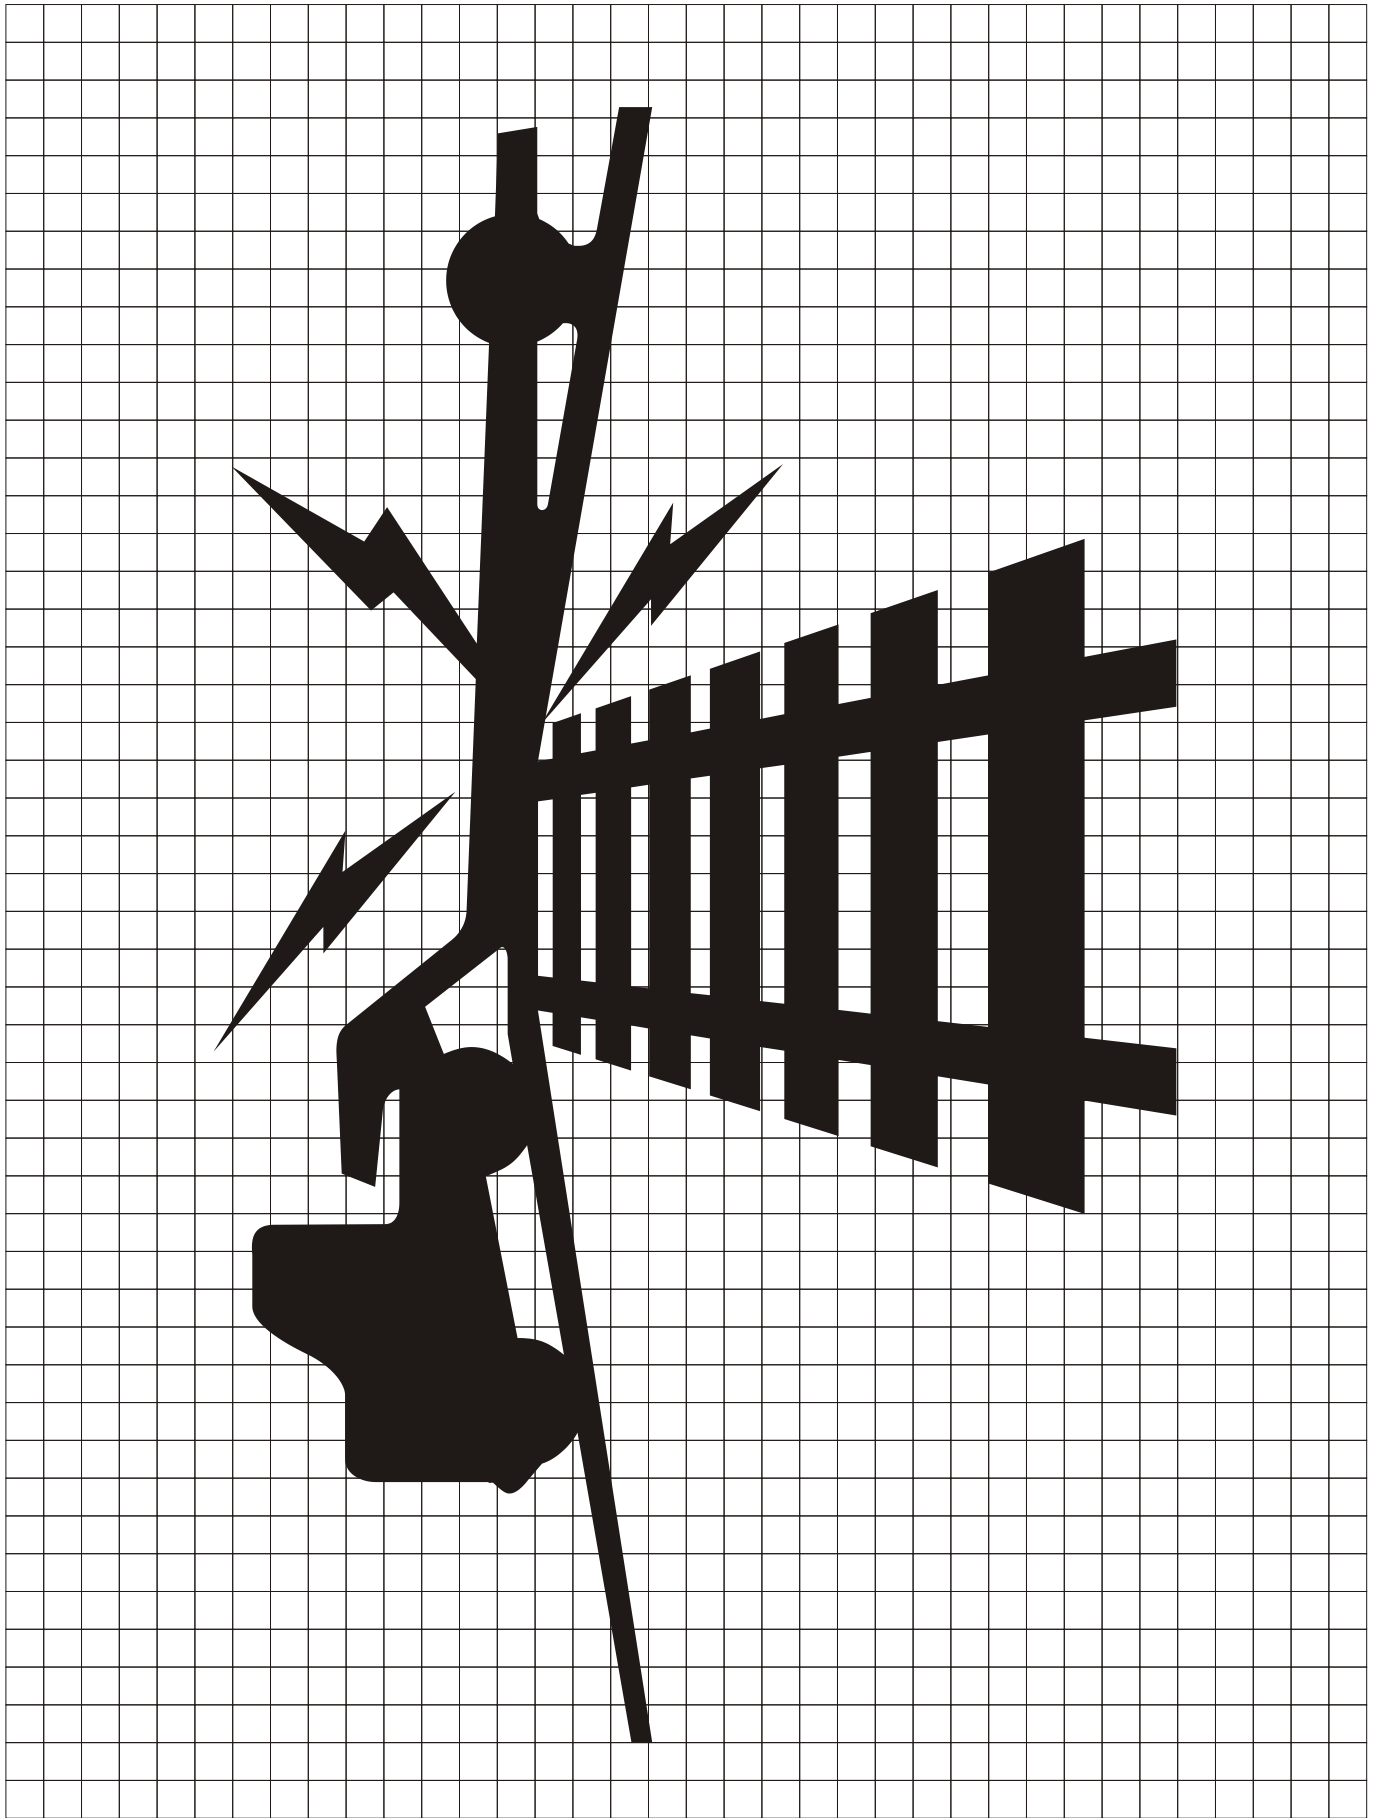


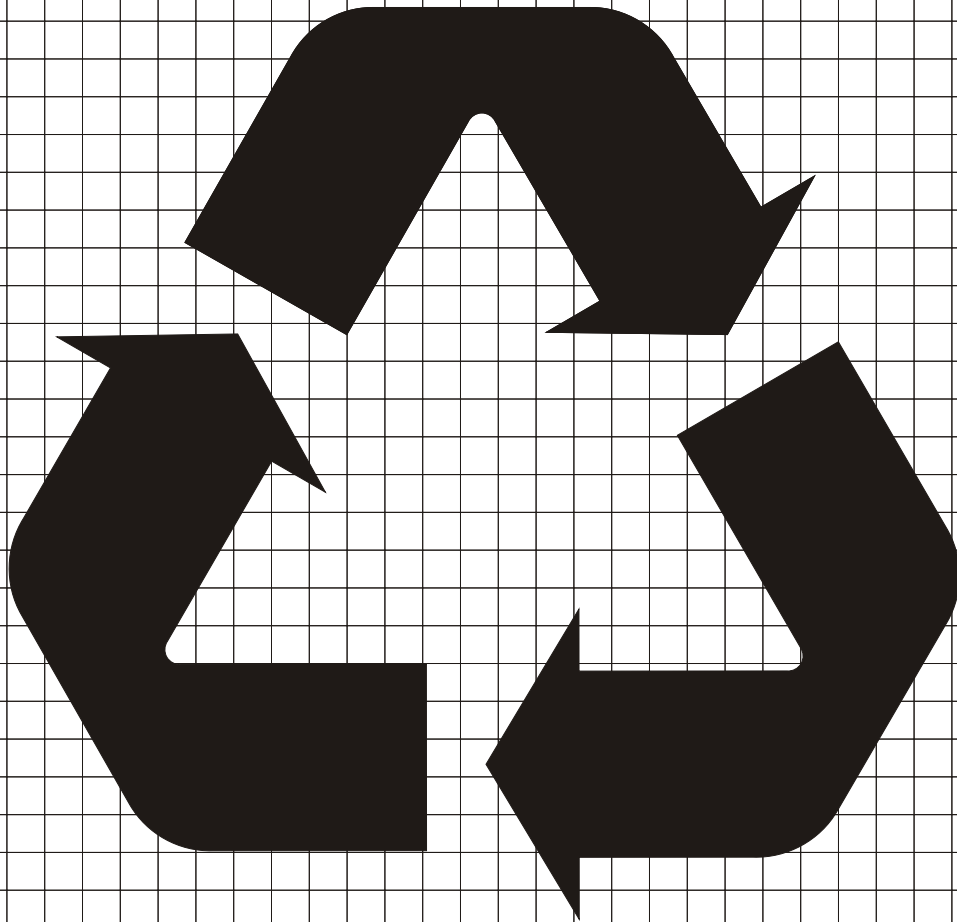





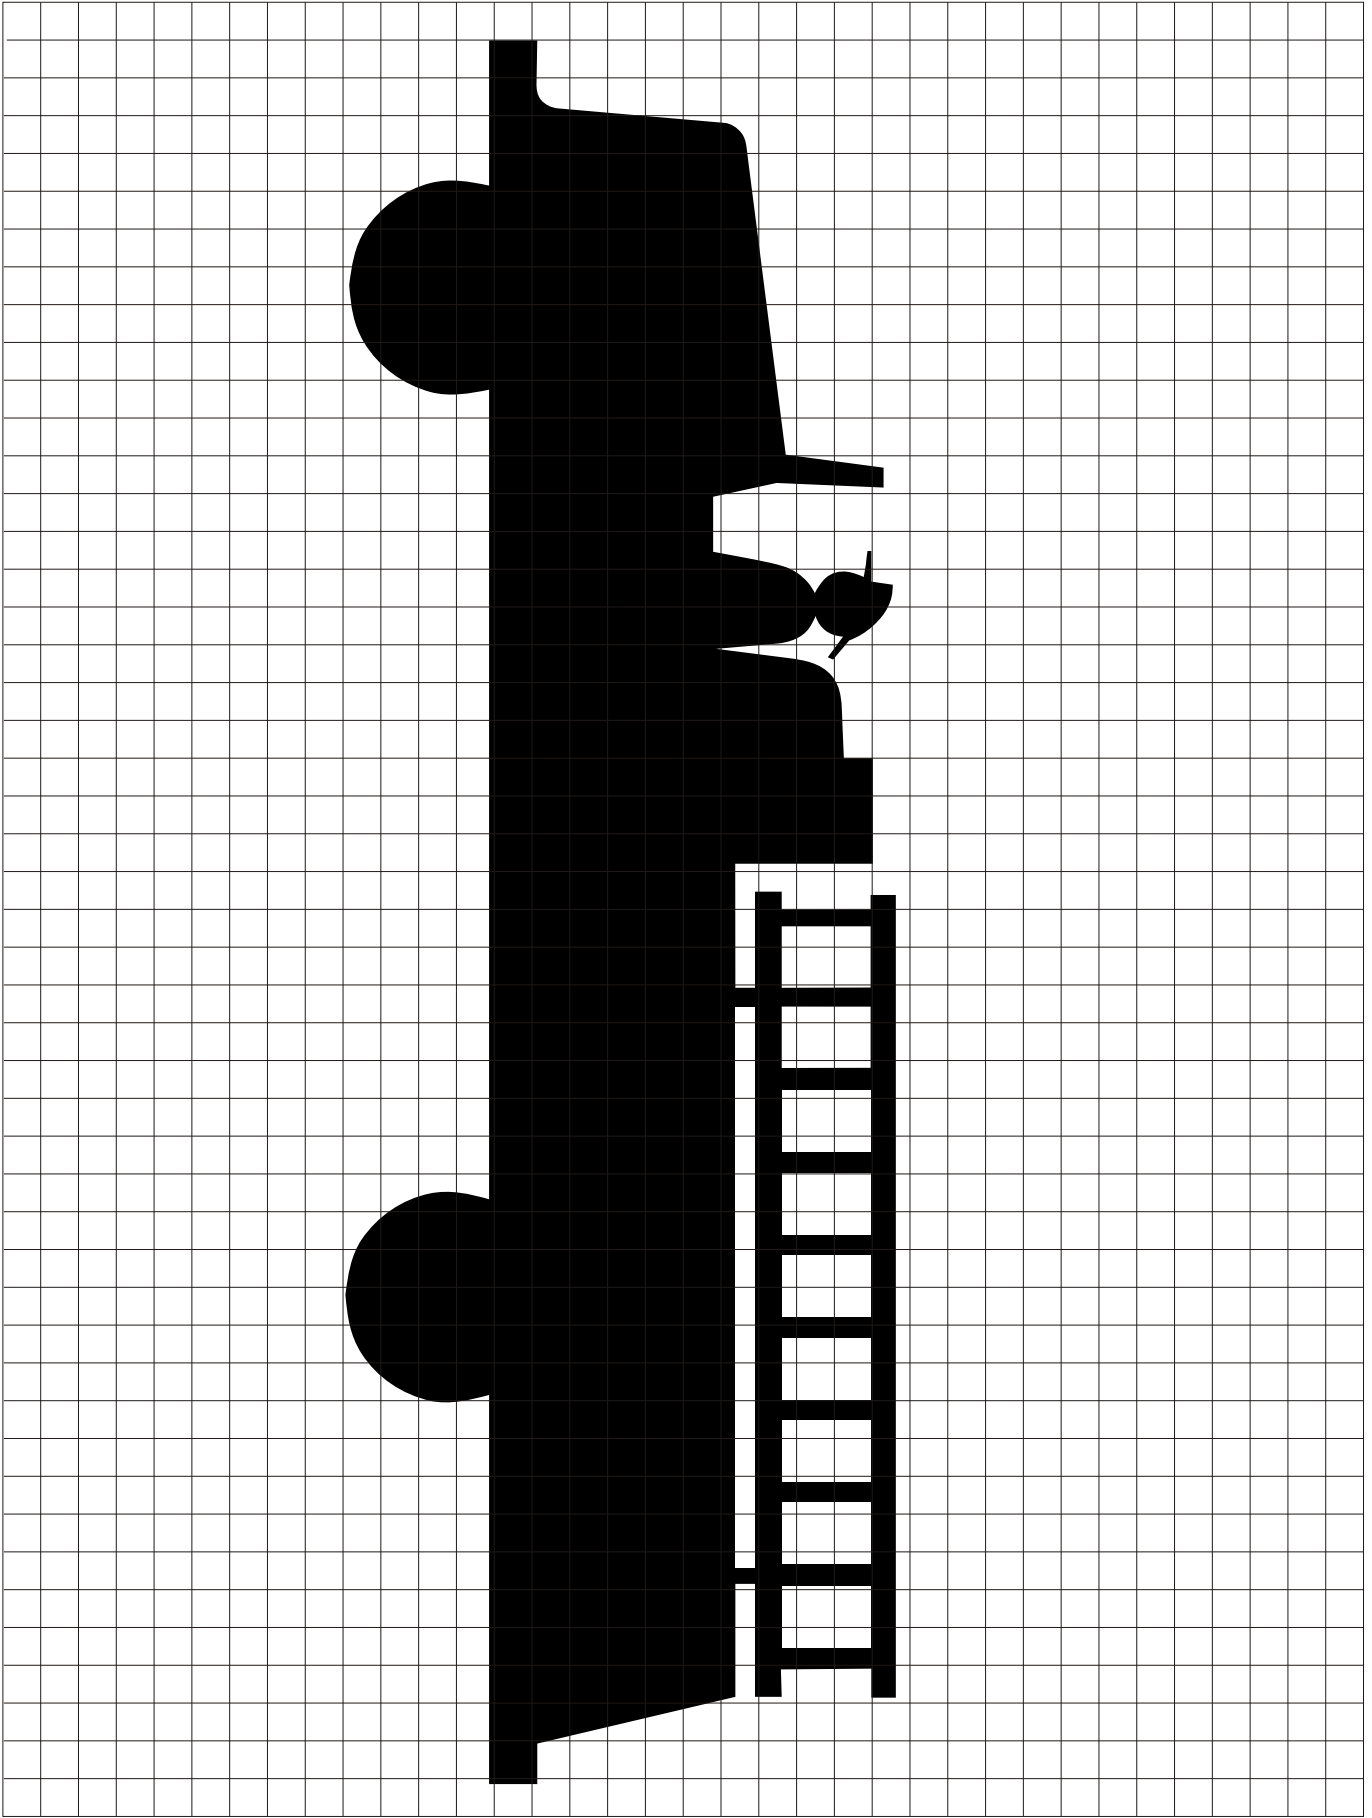


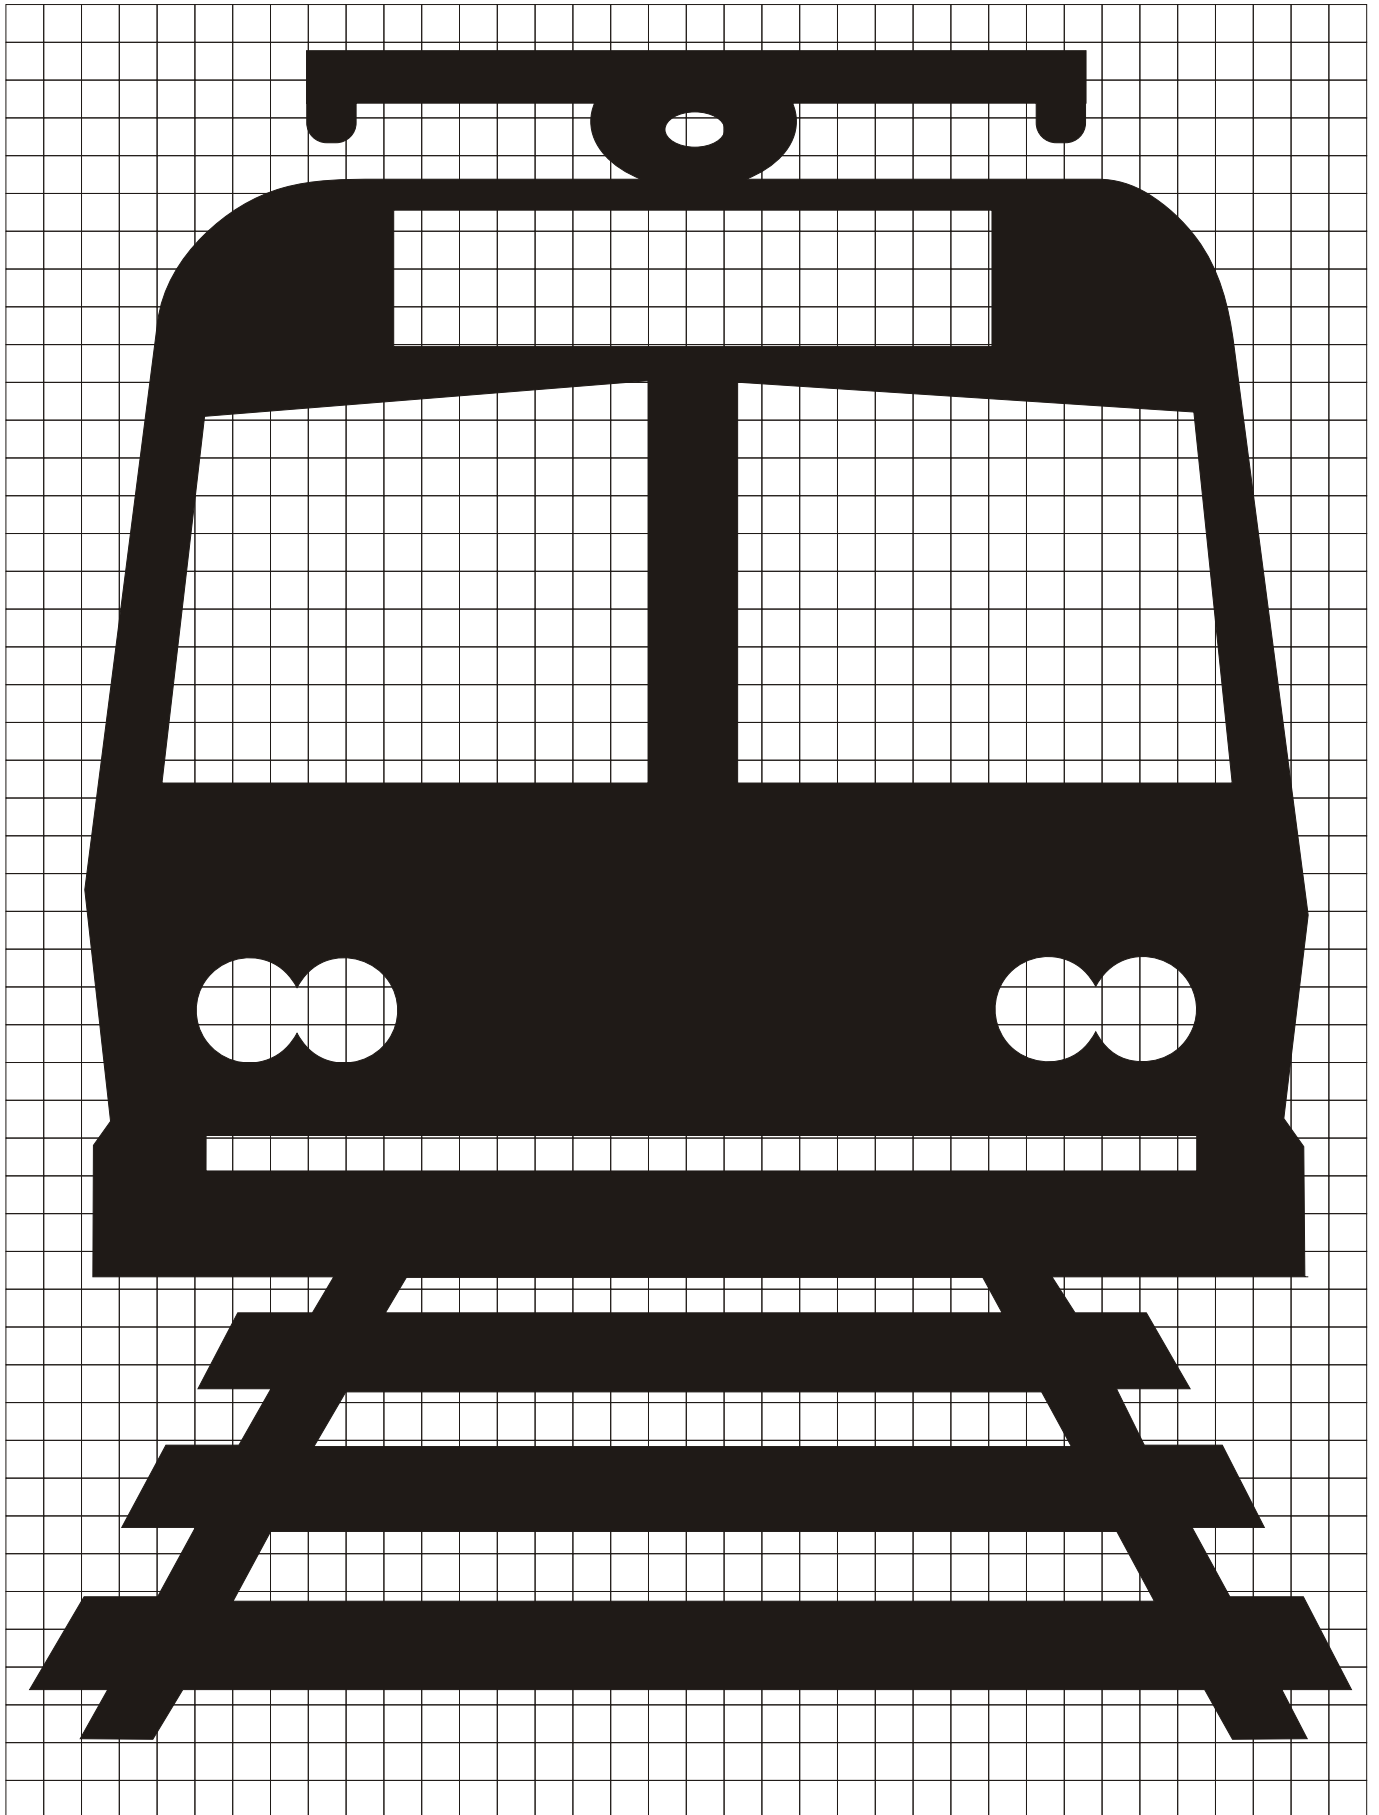

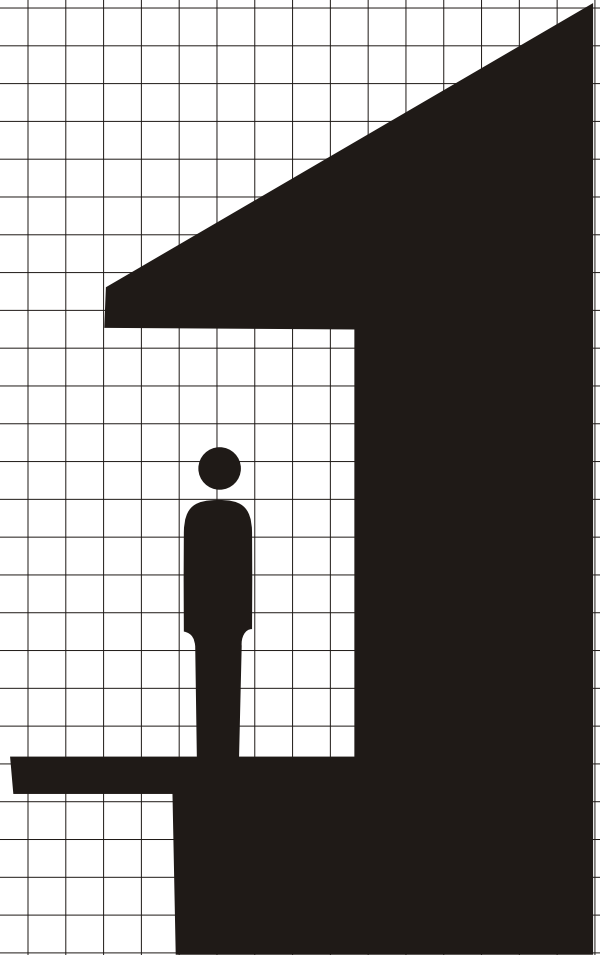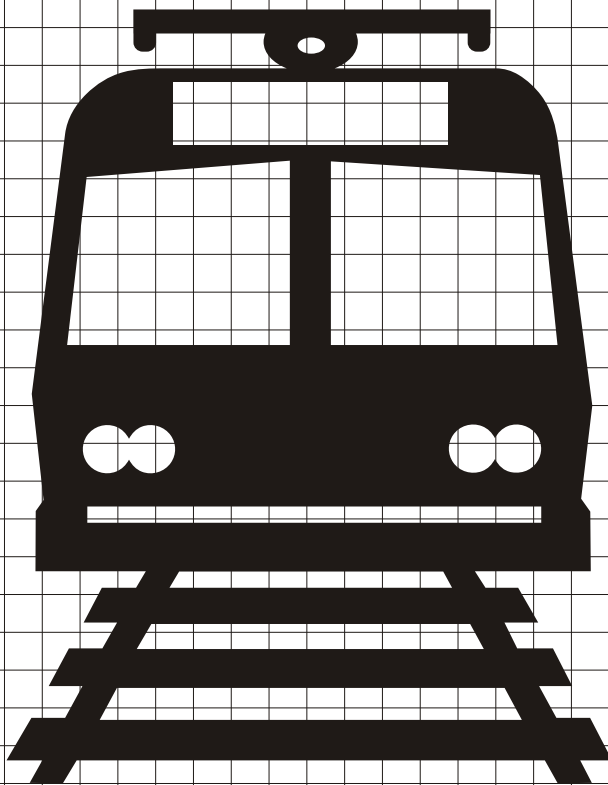


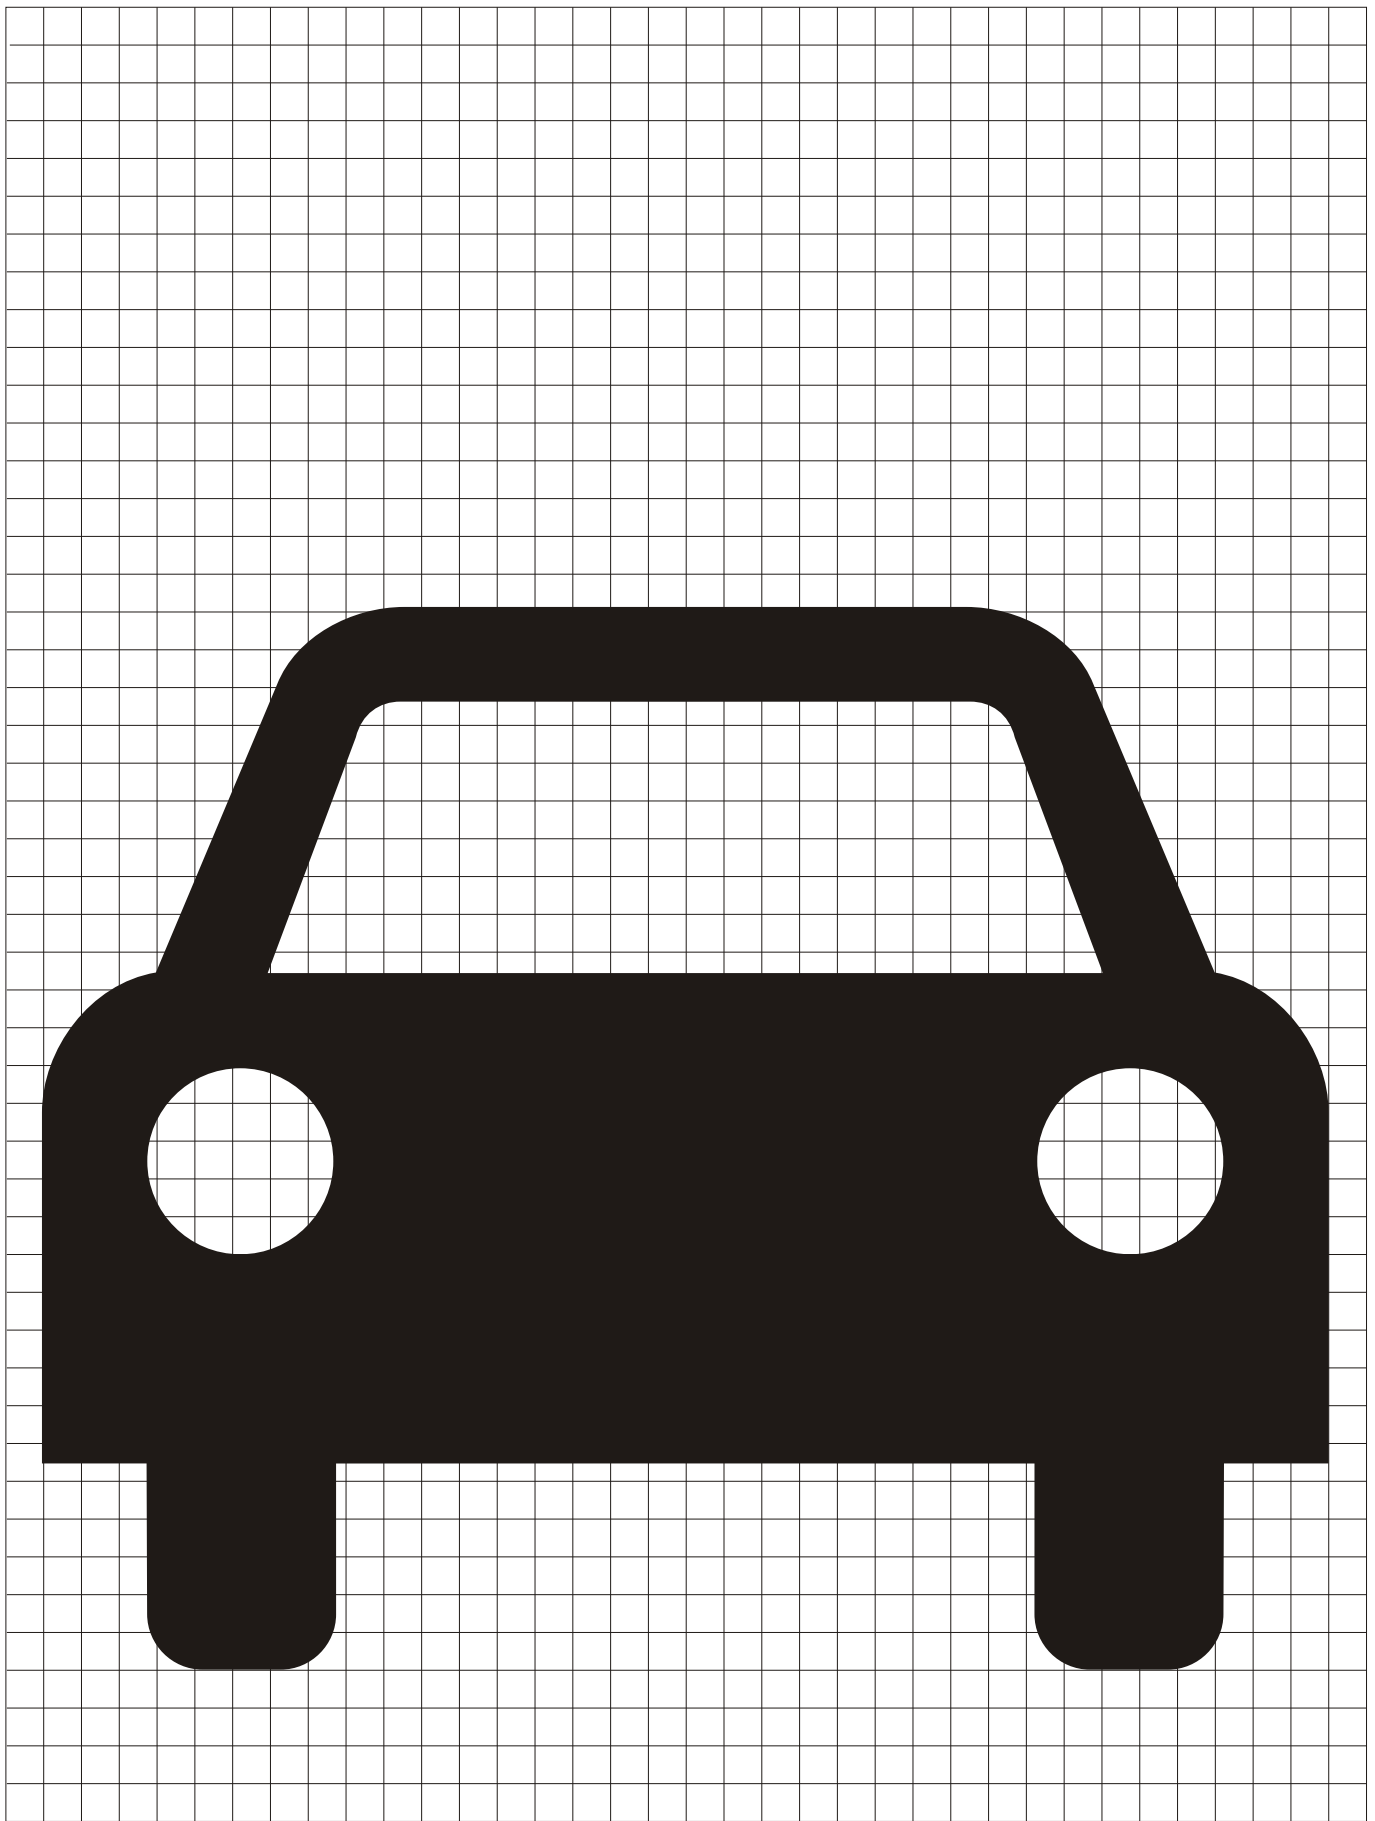

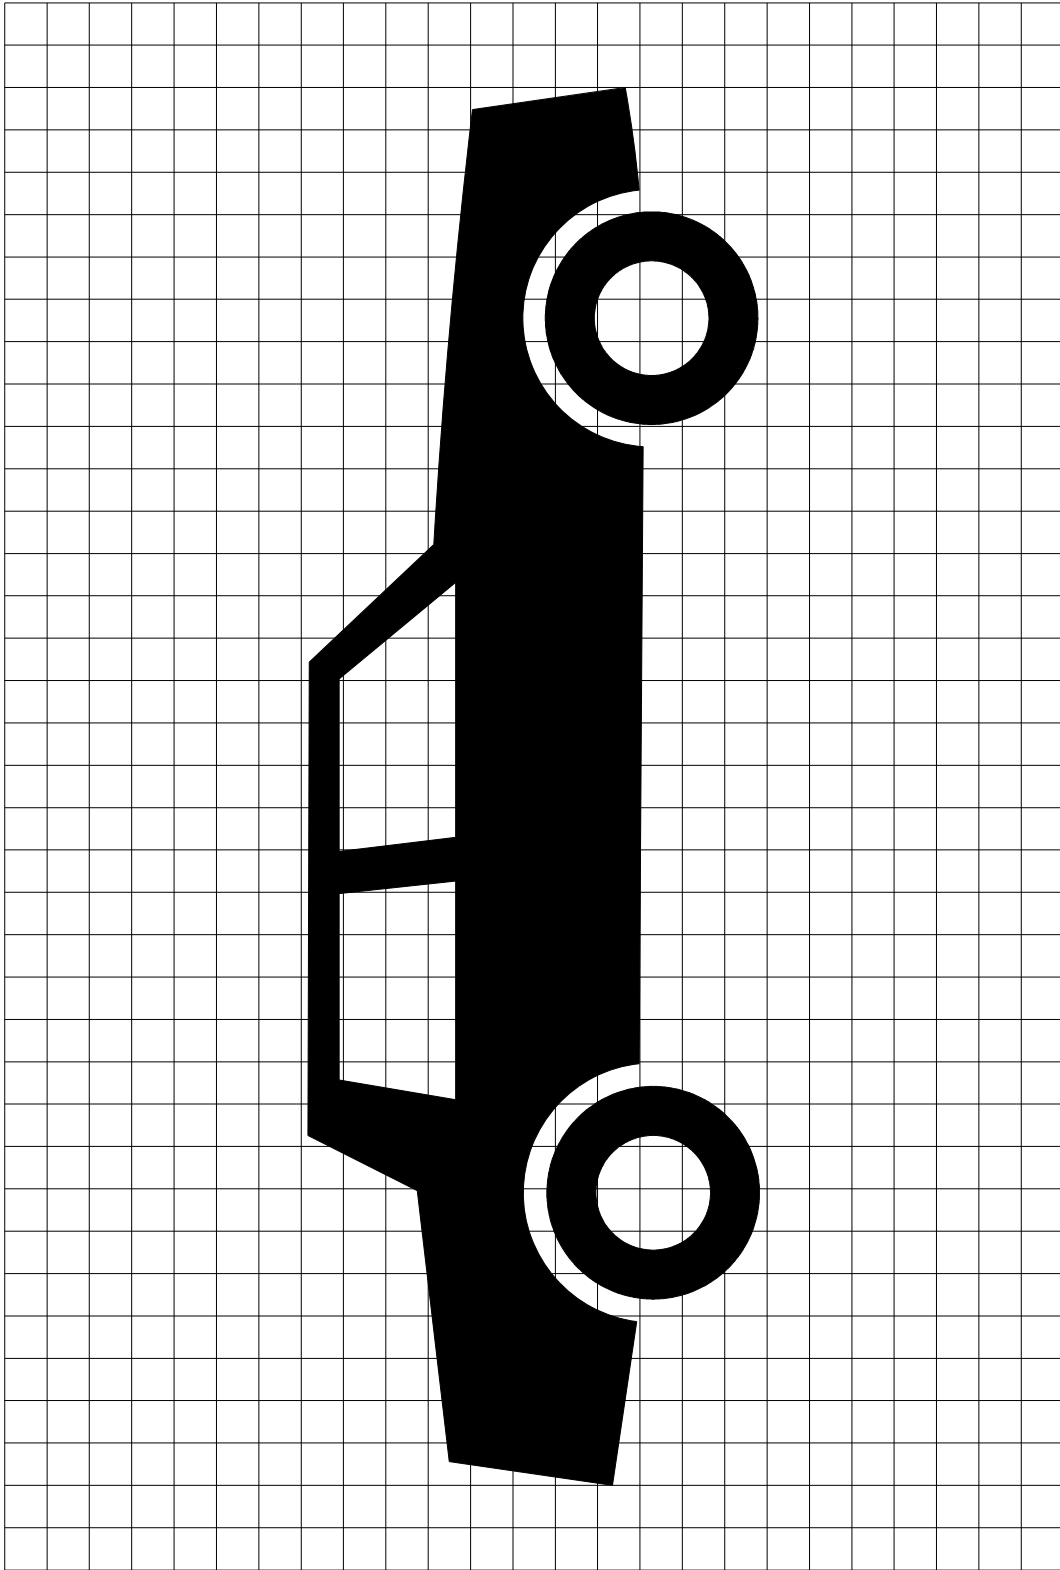


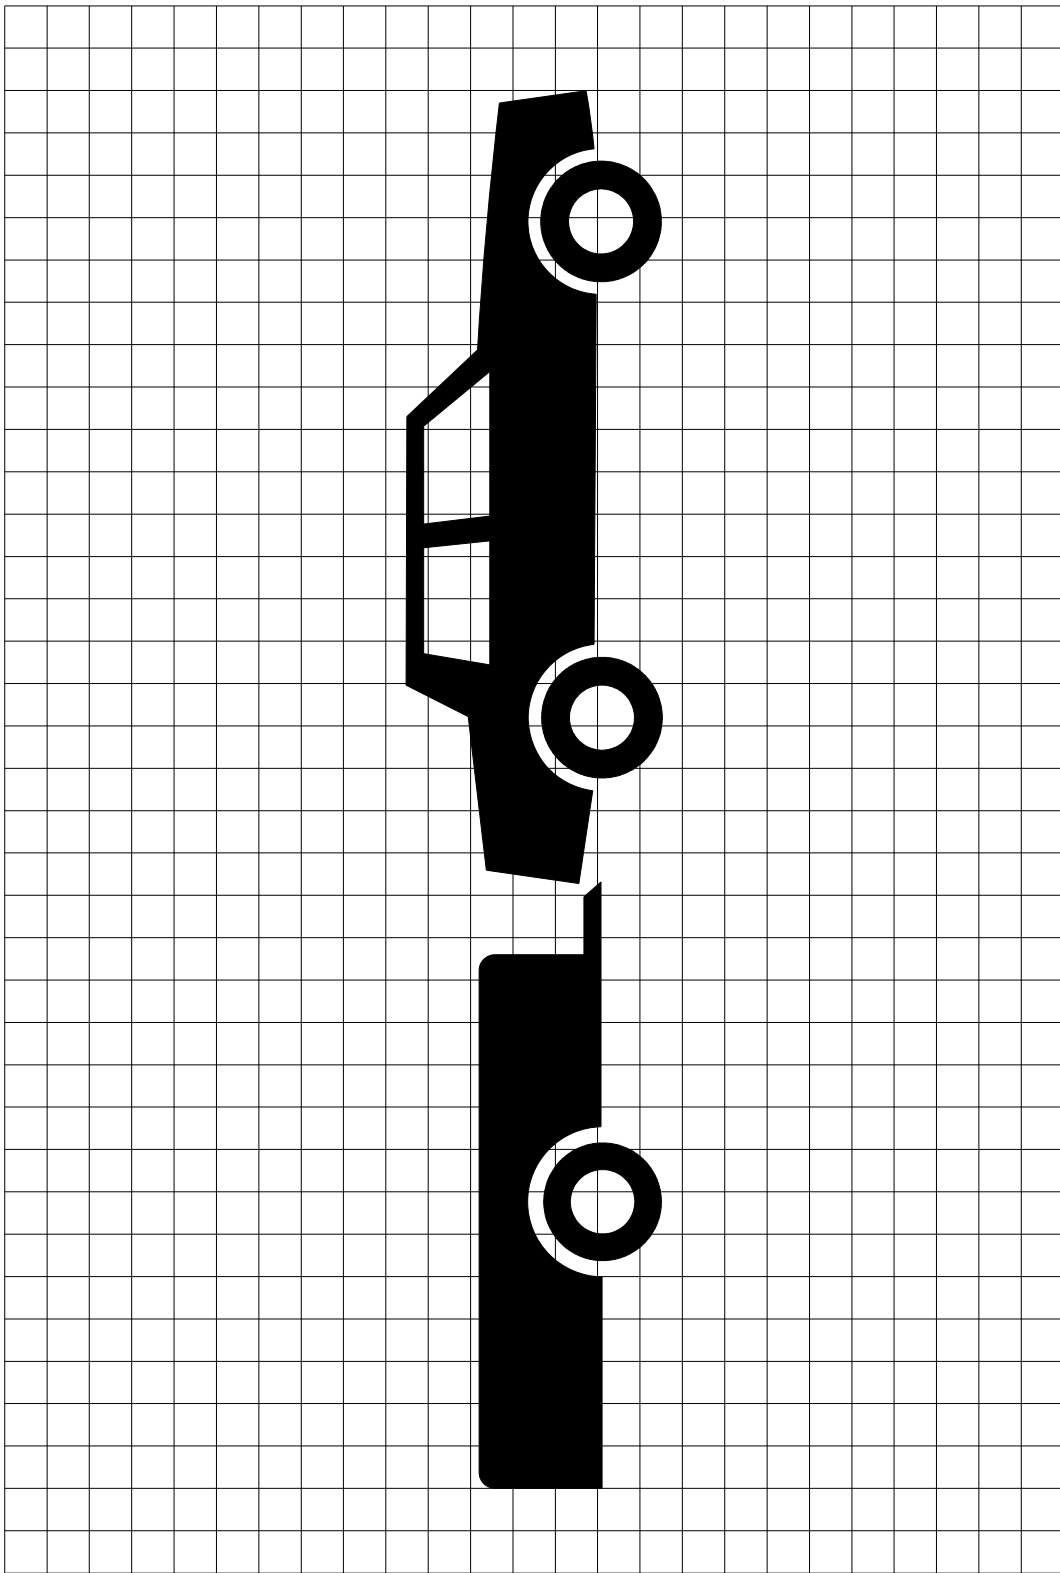


6-19.2 (MI)

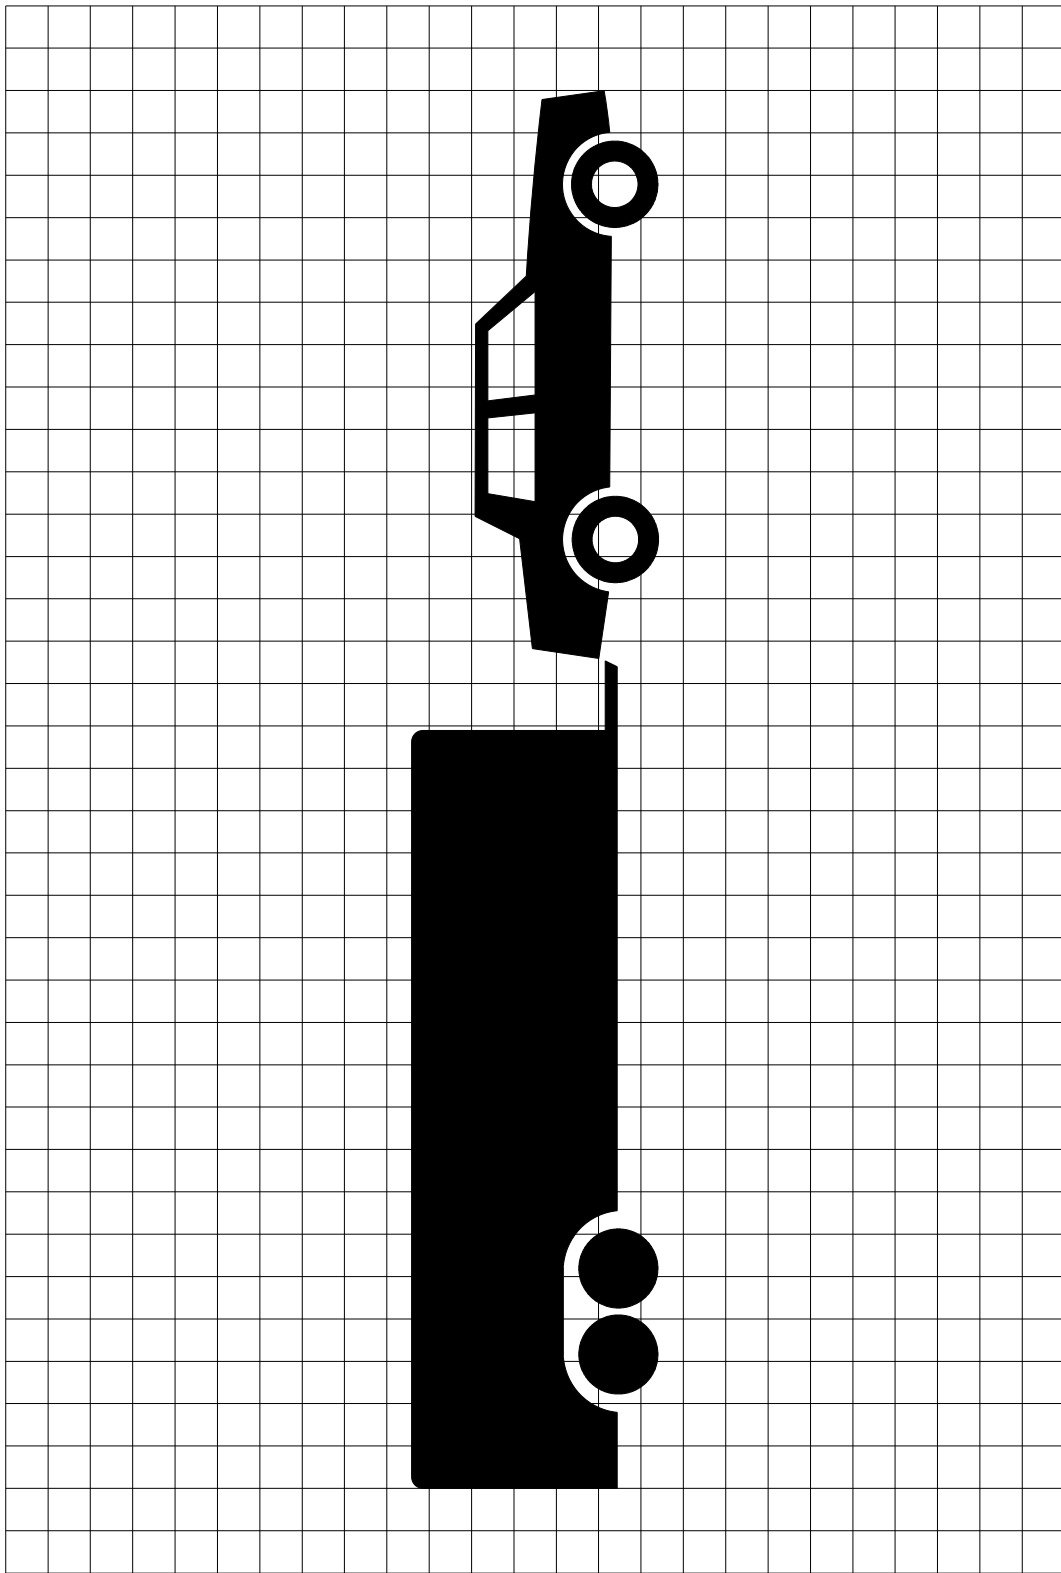



6-19.3 (MI)

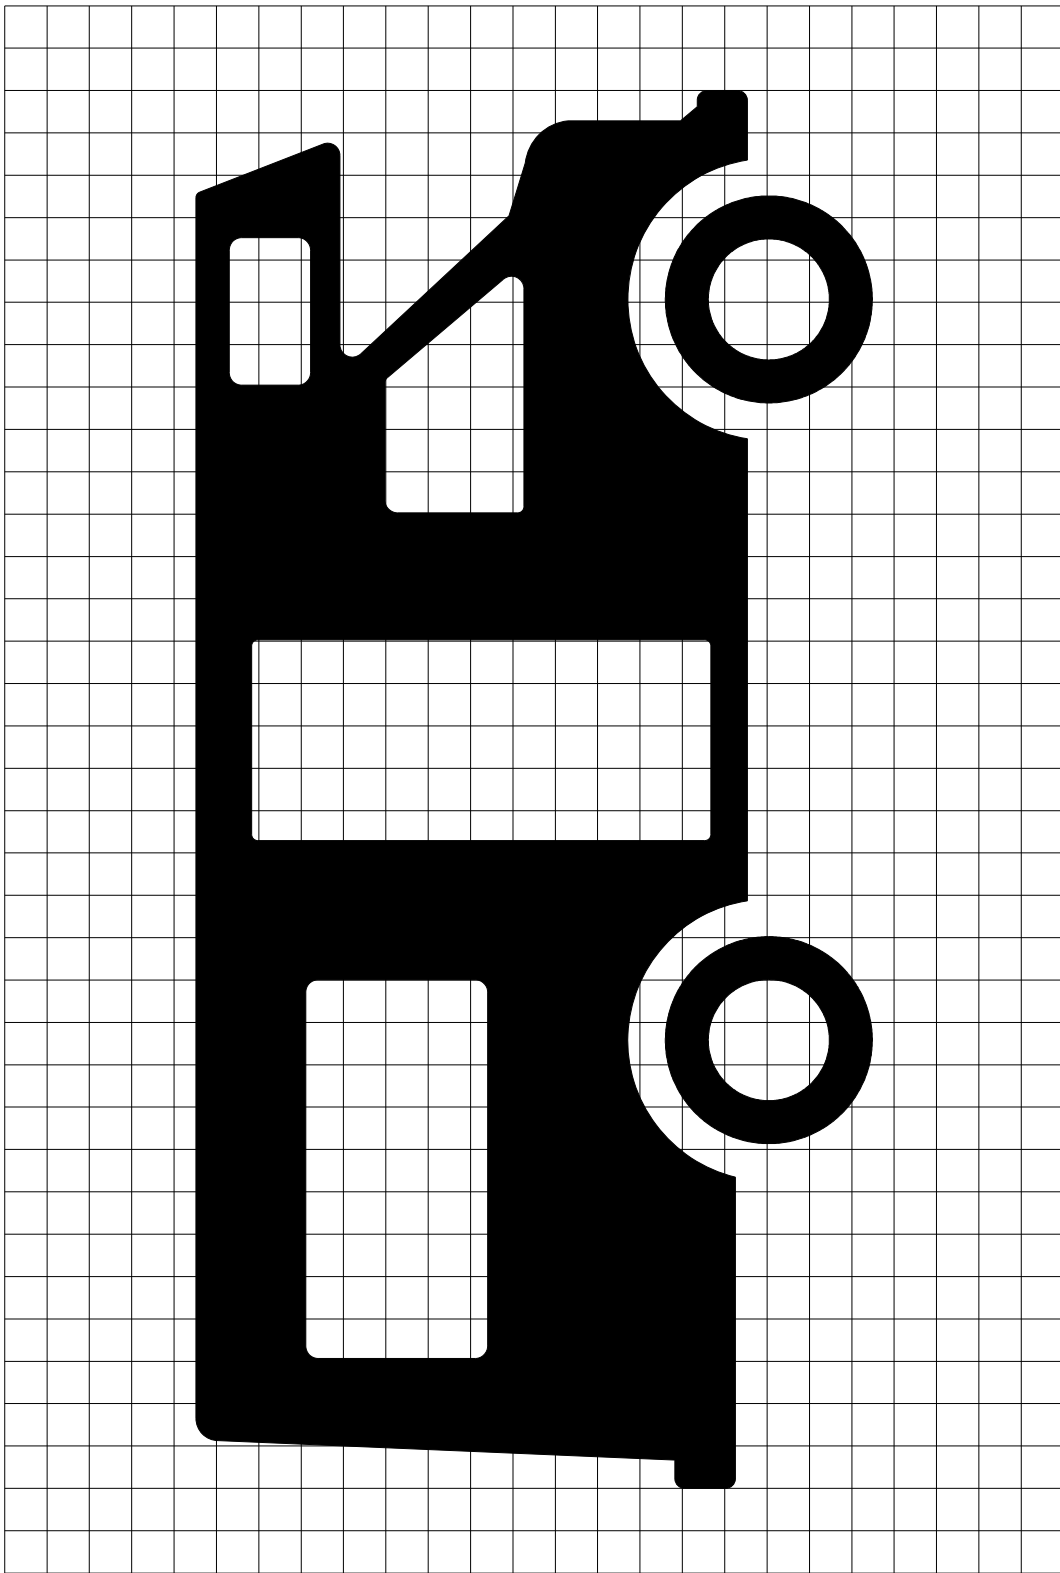



6-19.4 (MI)

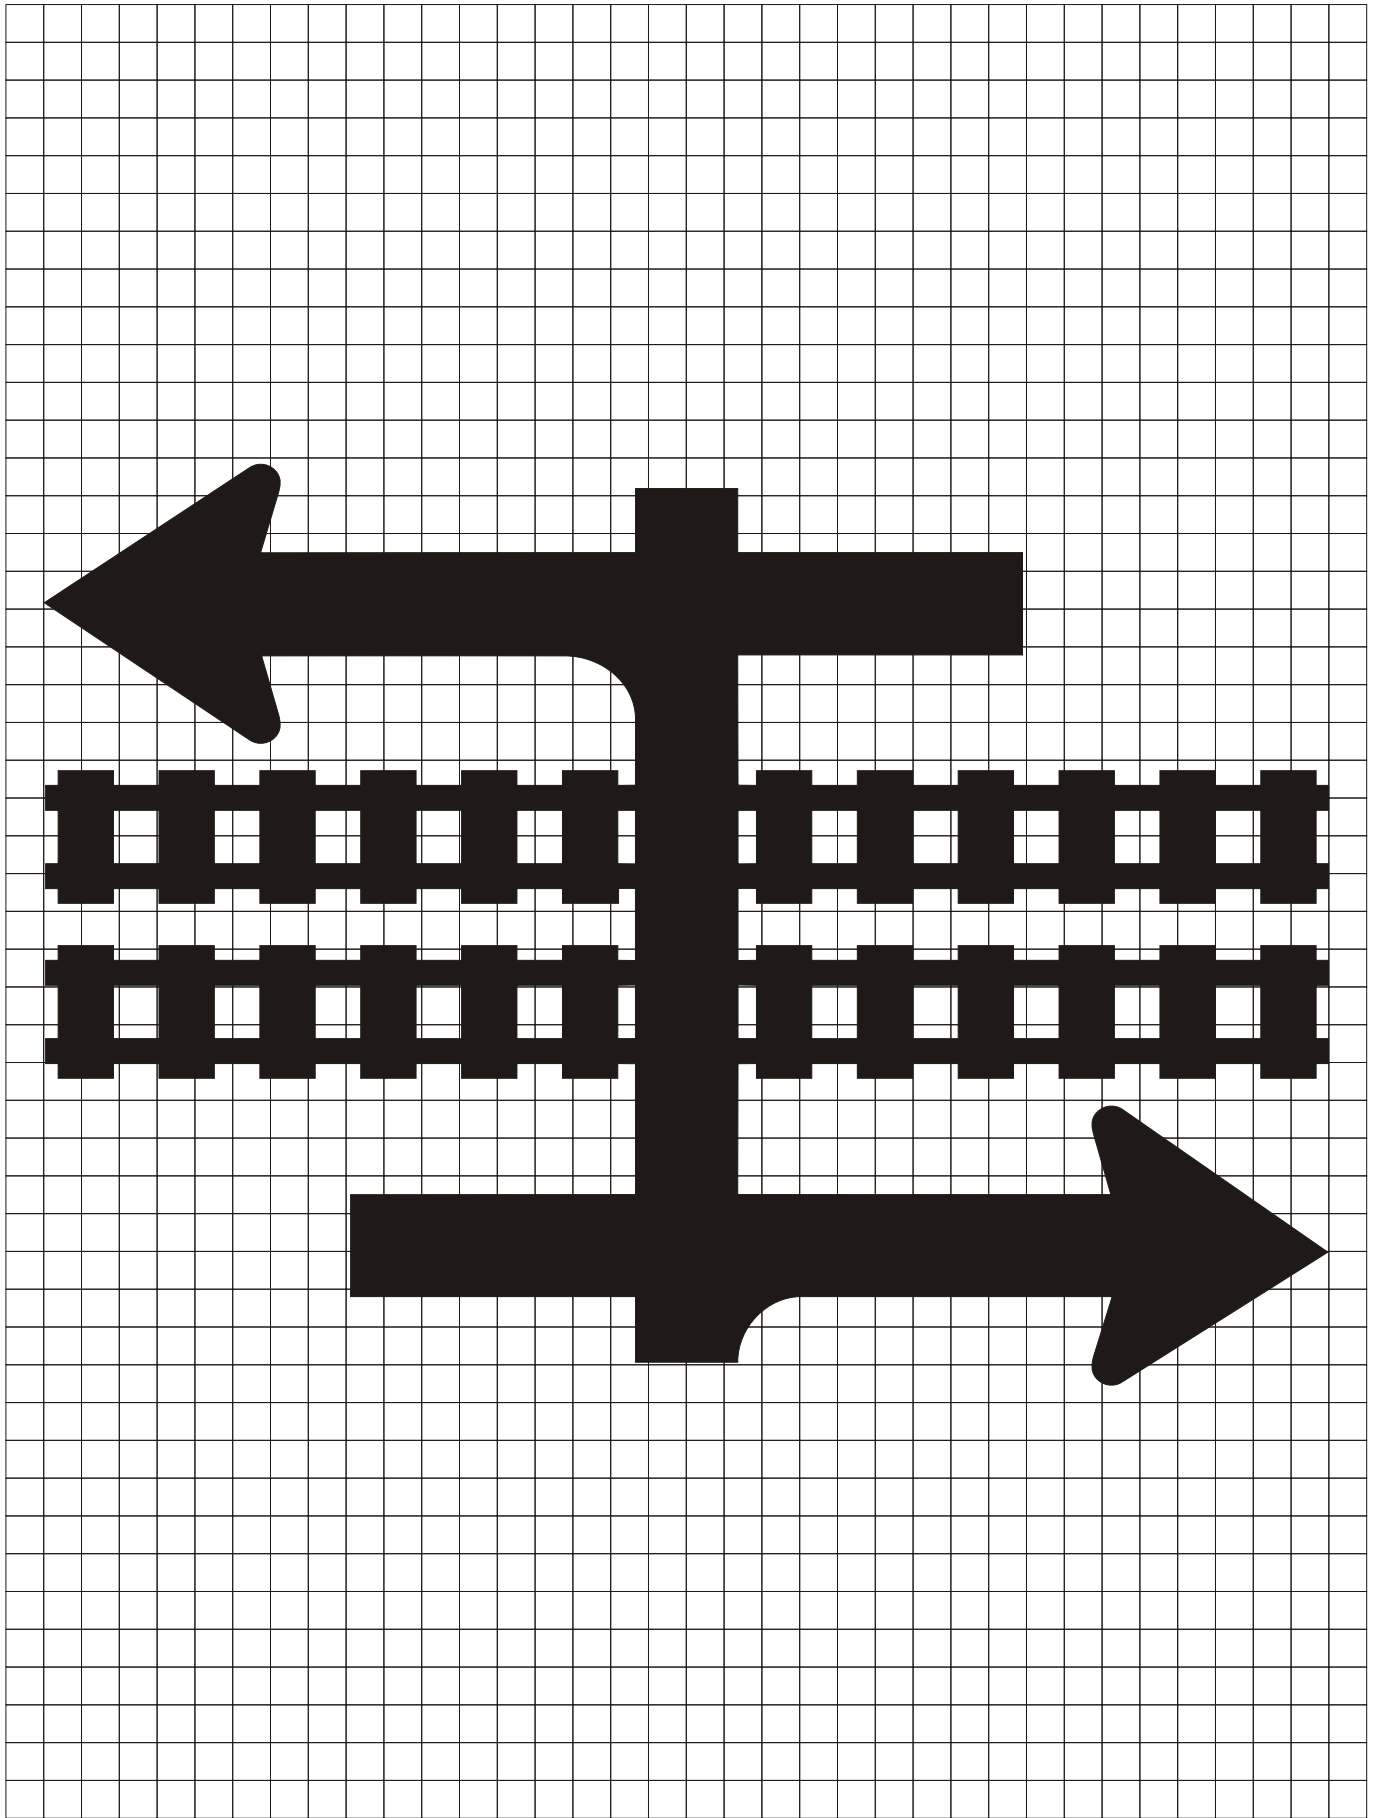


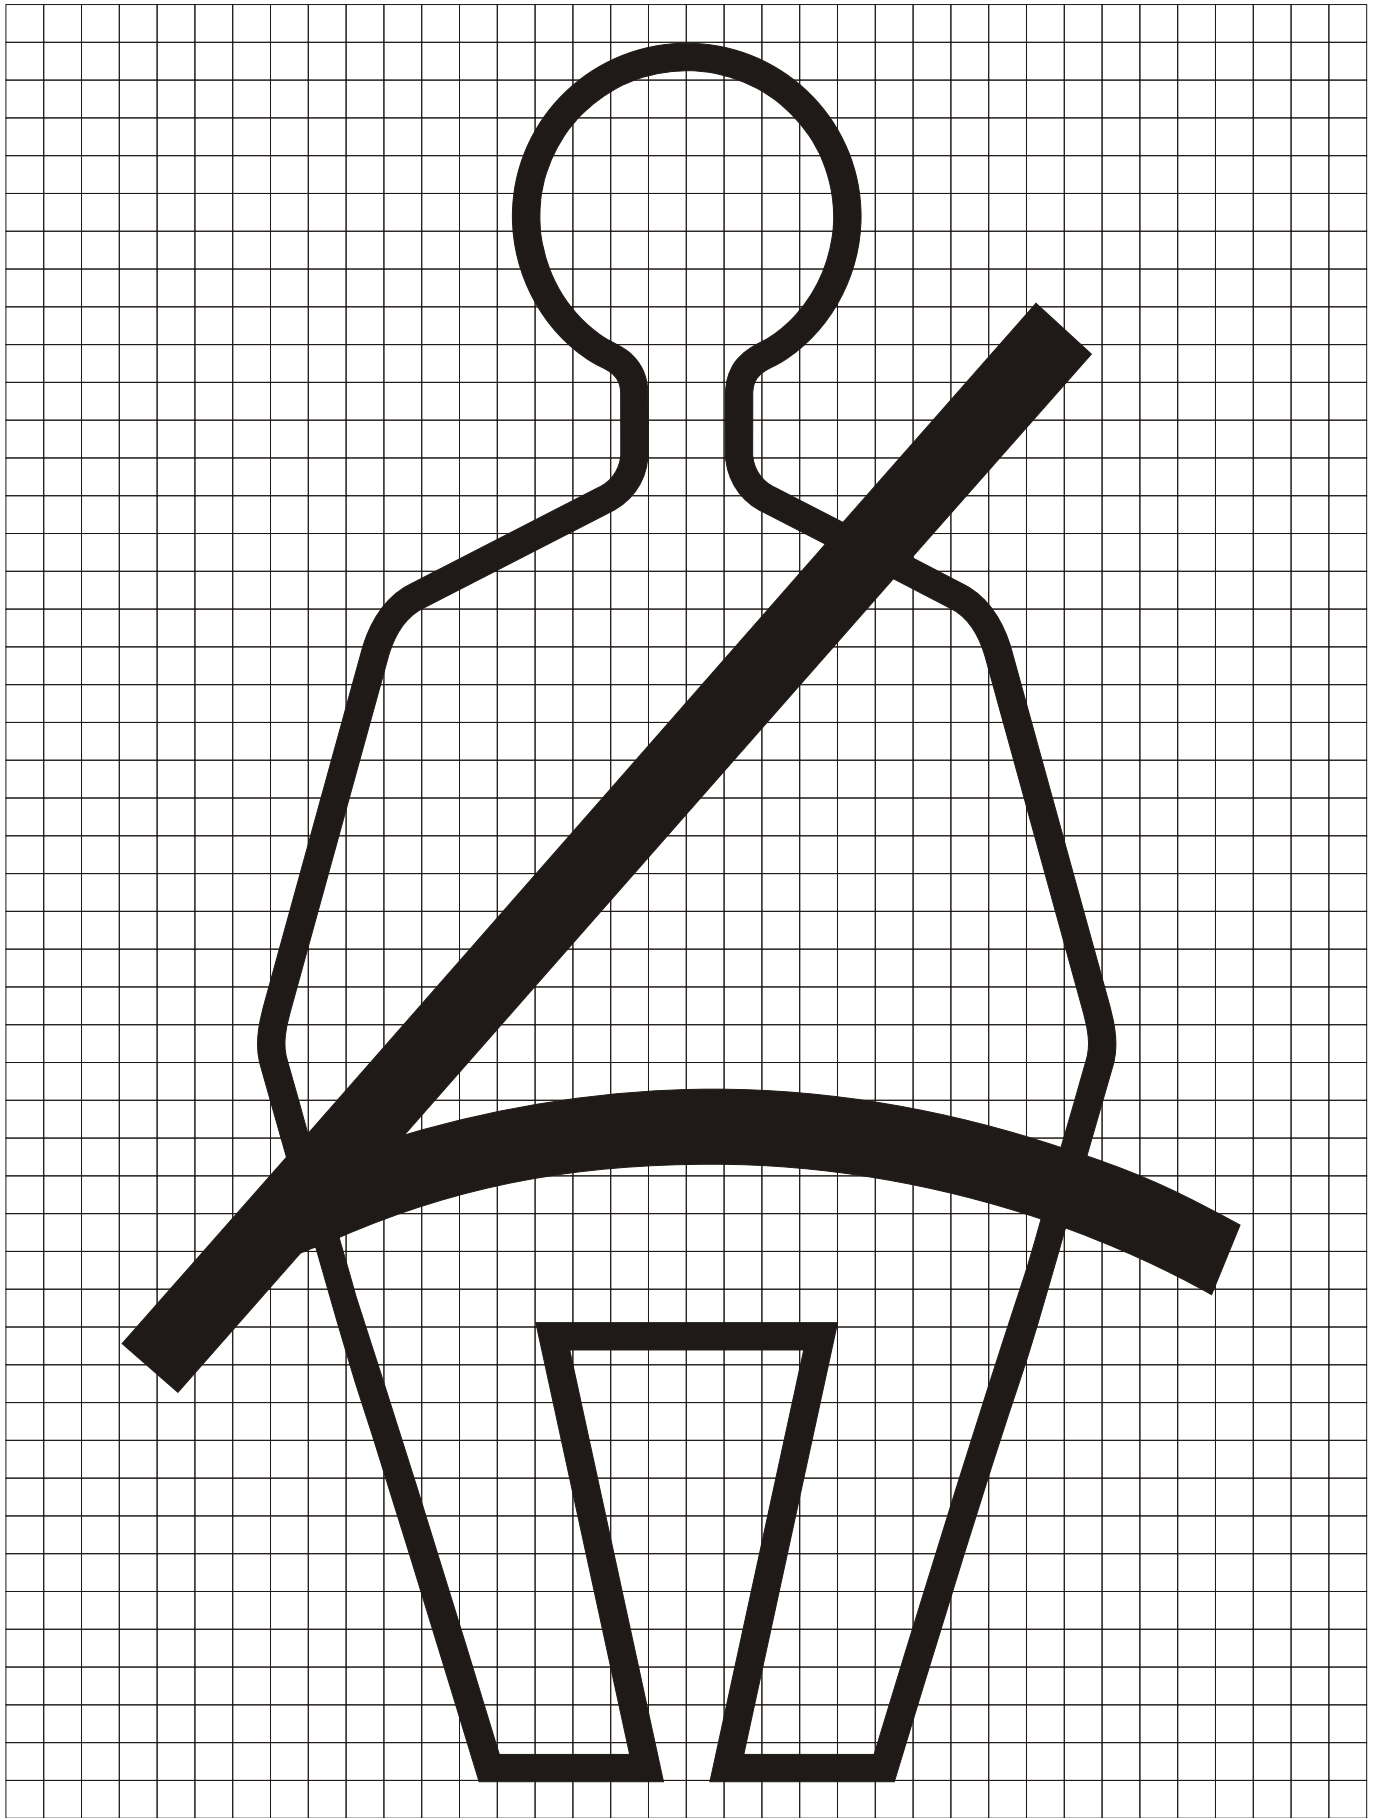


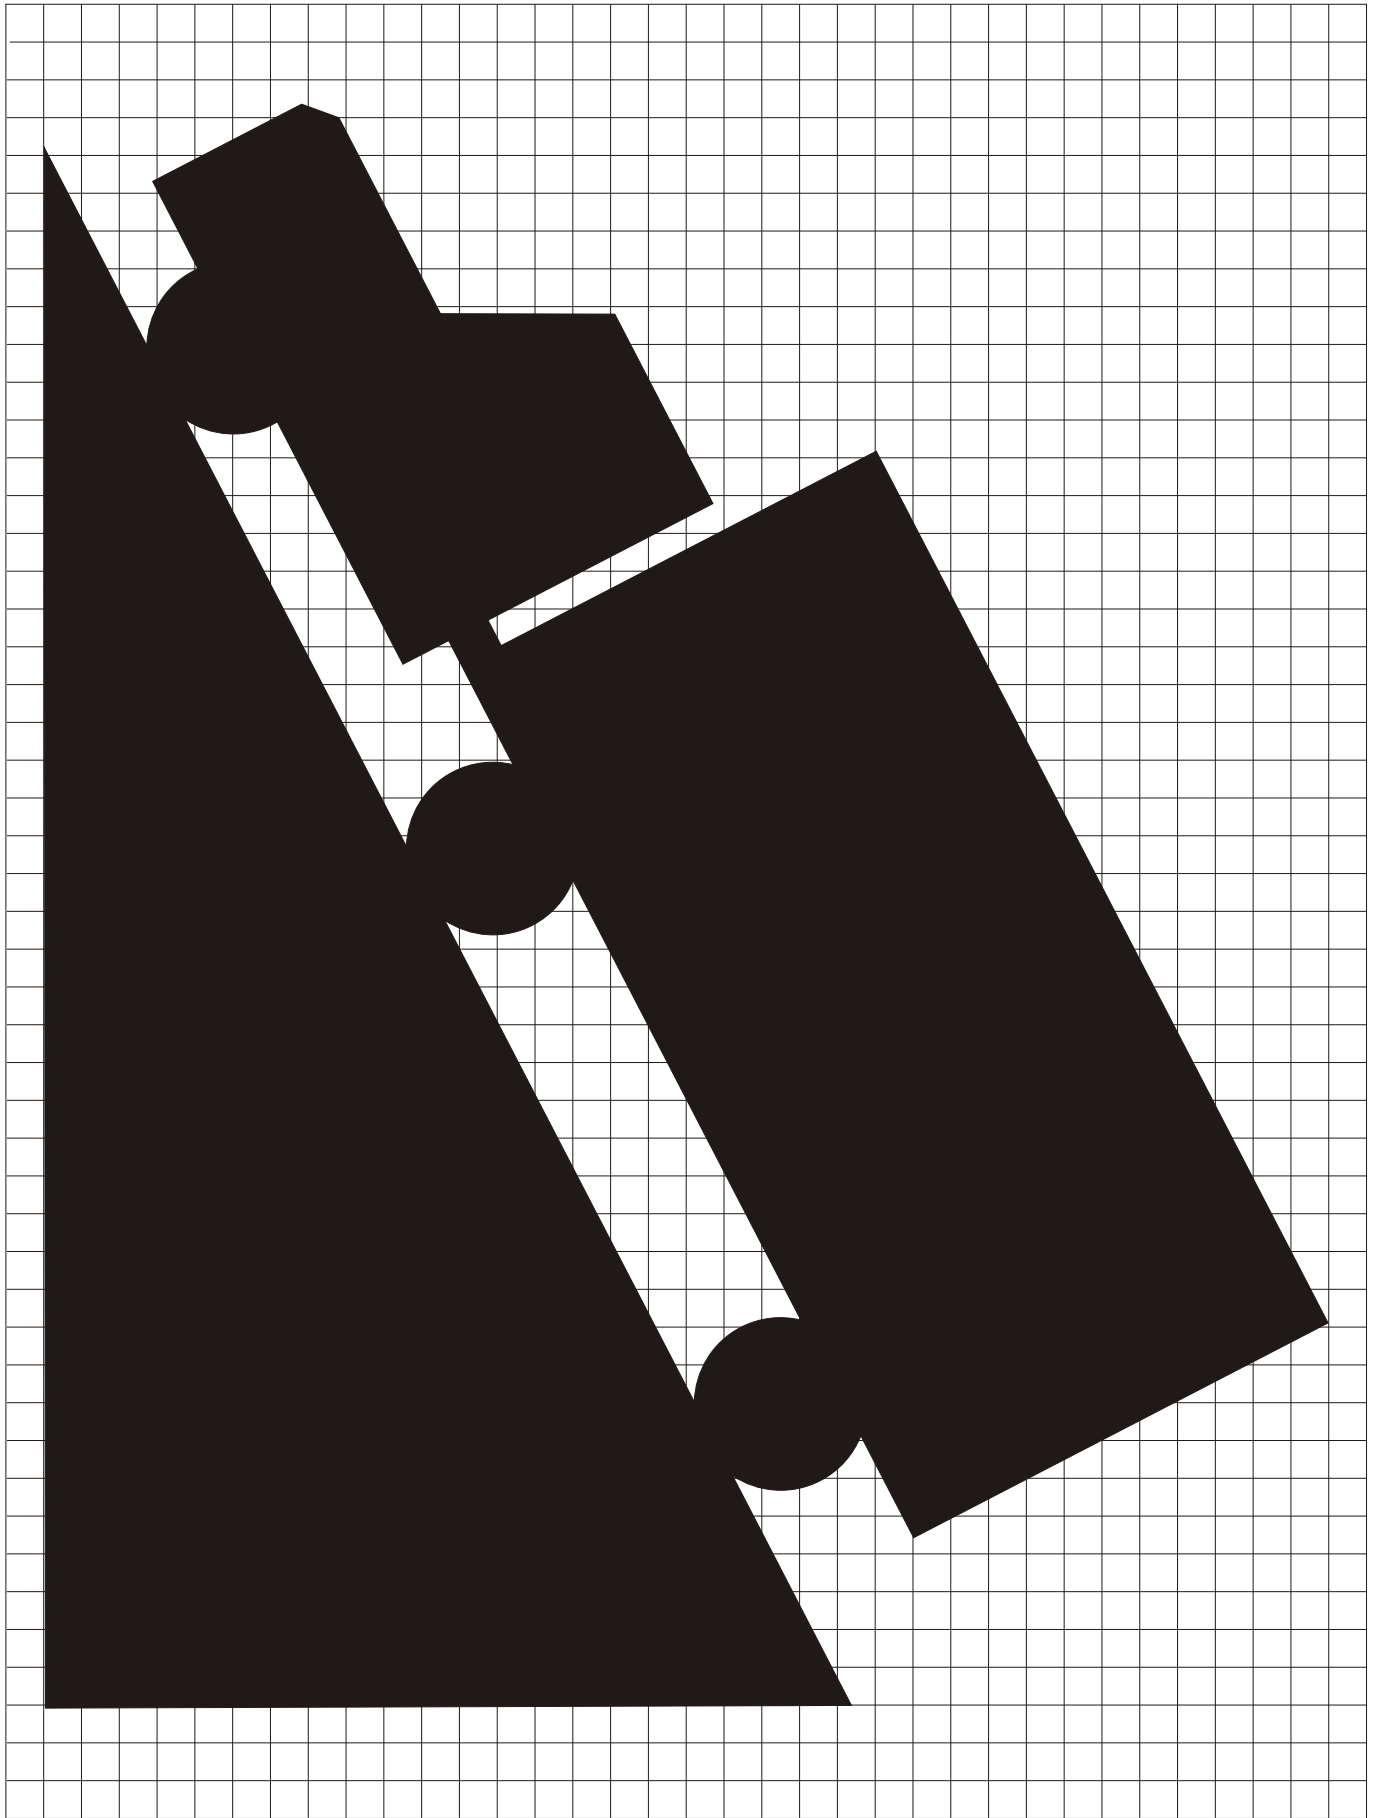


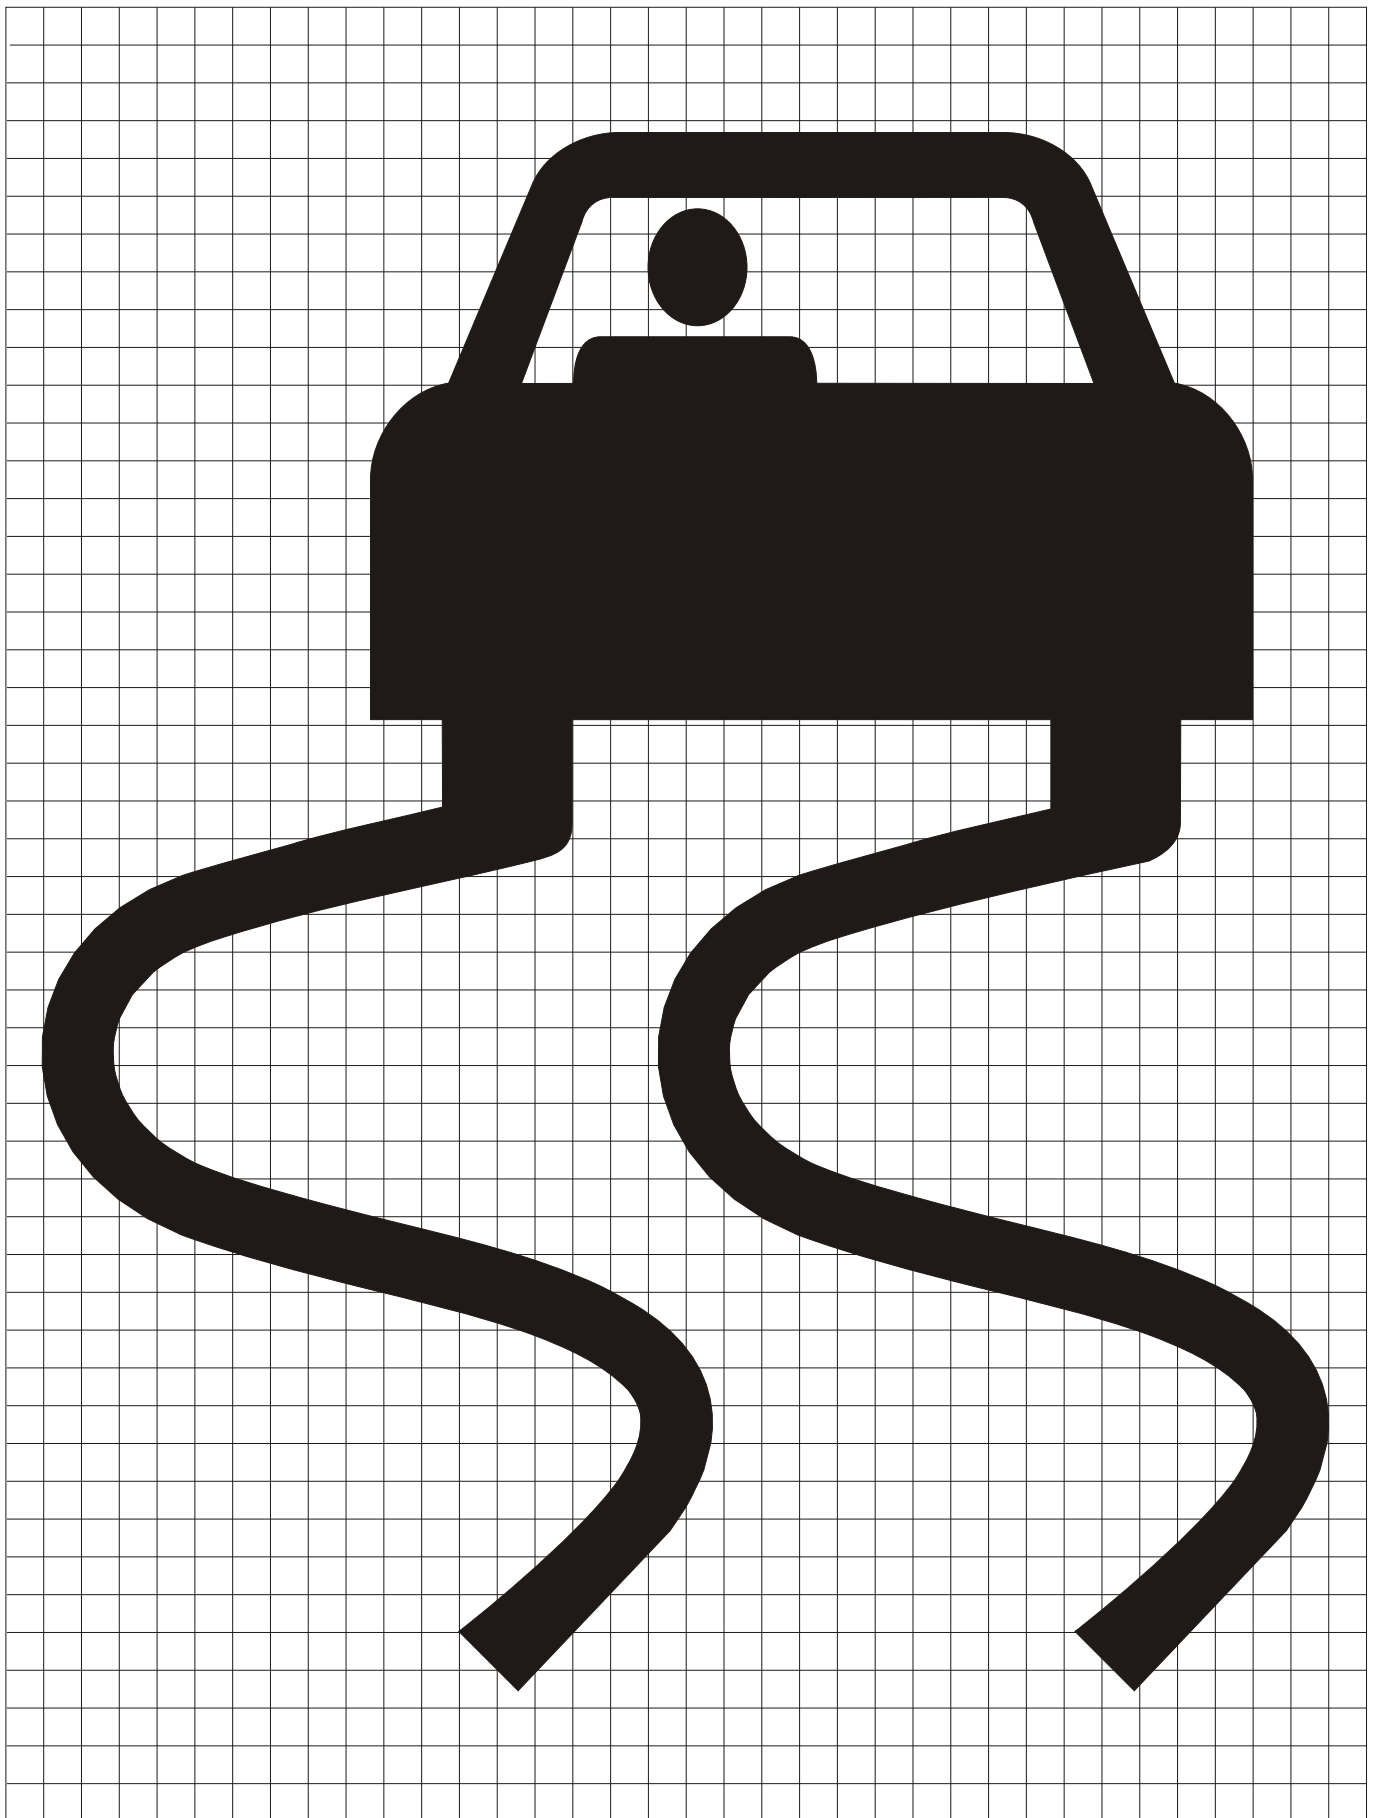


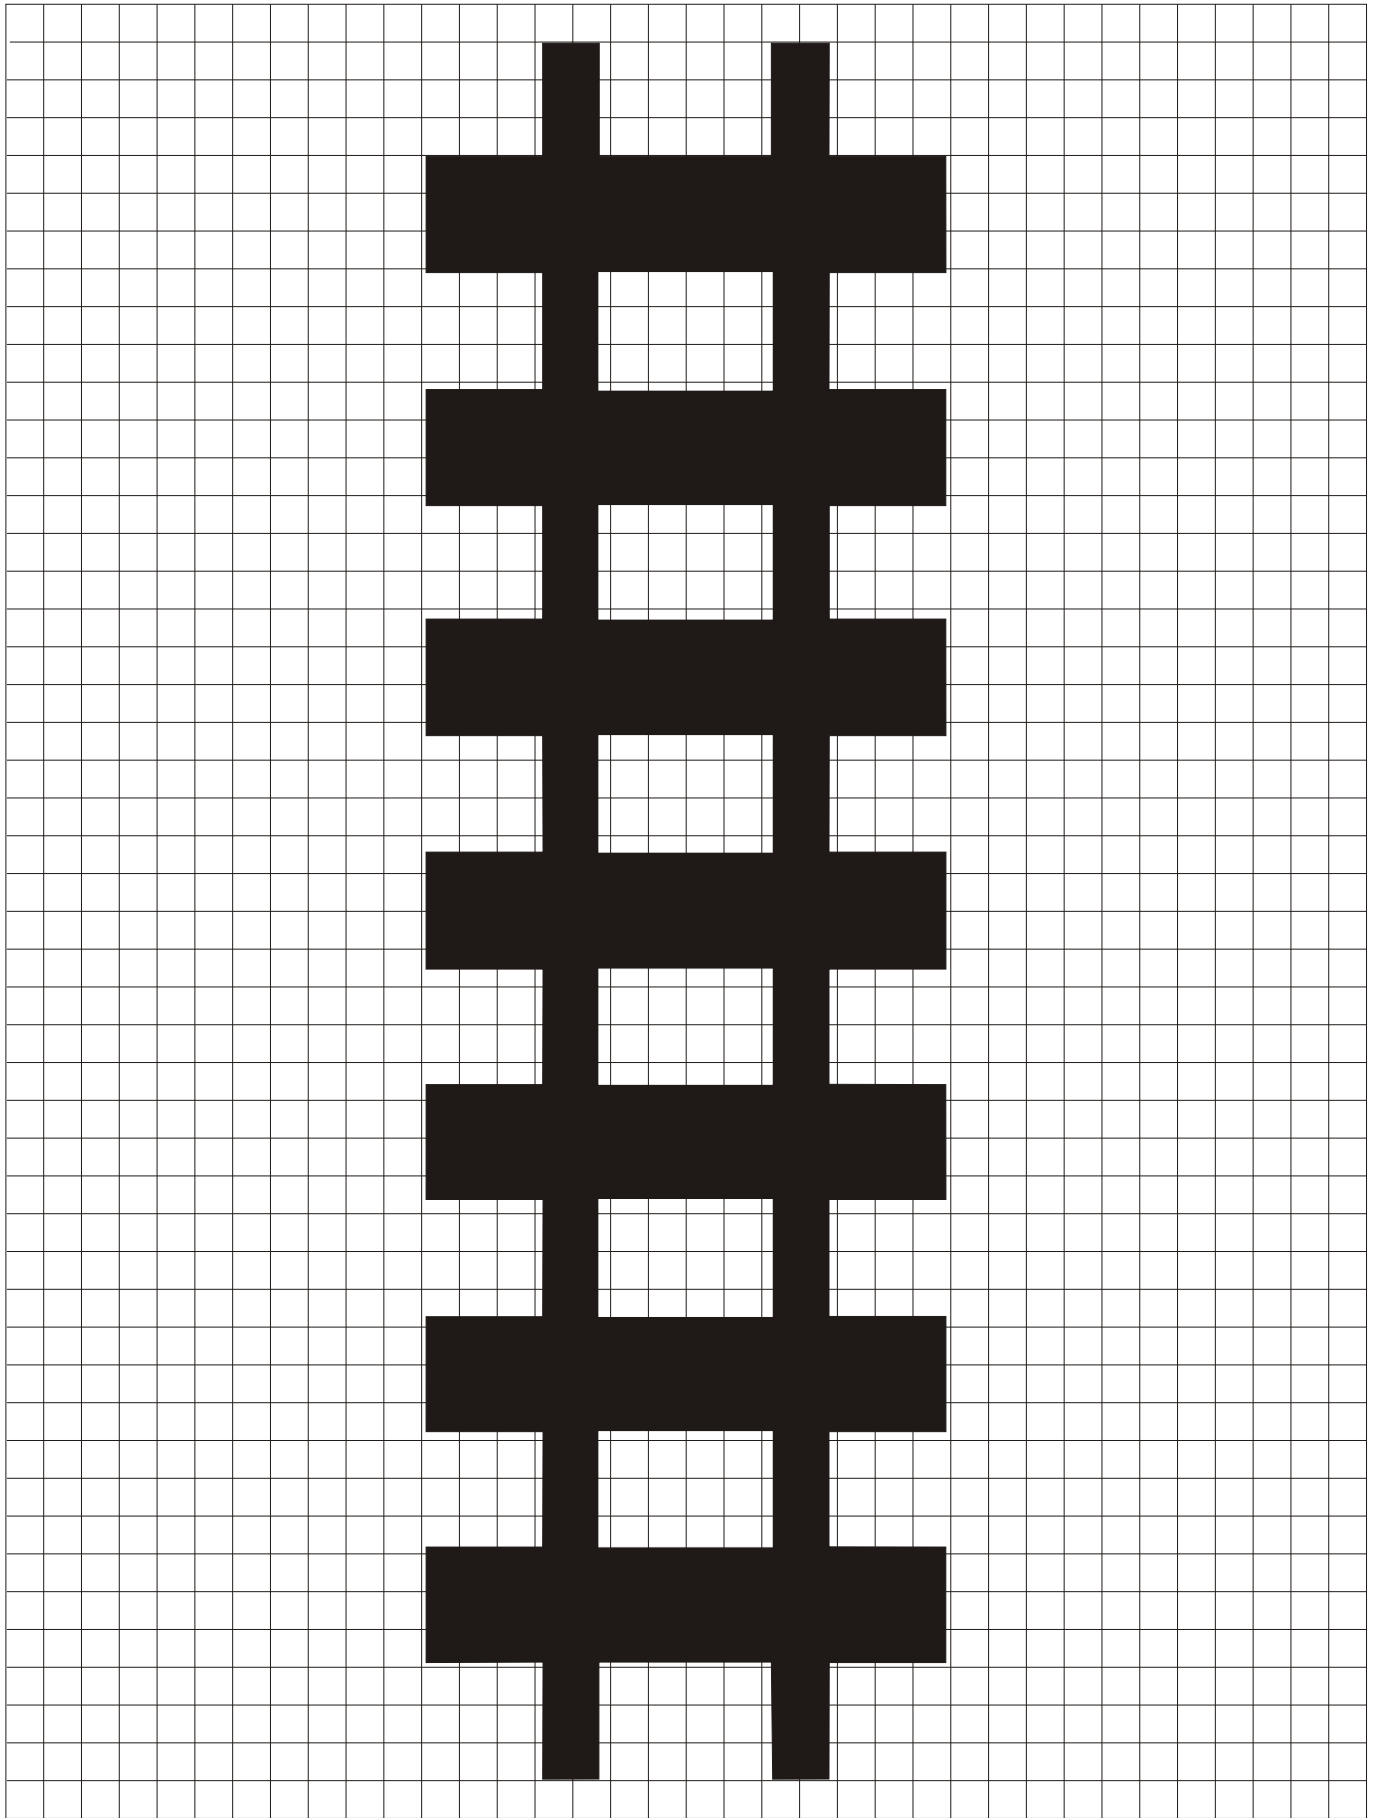


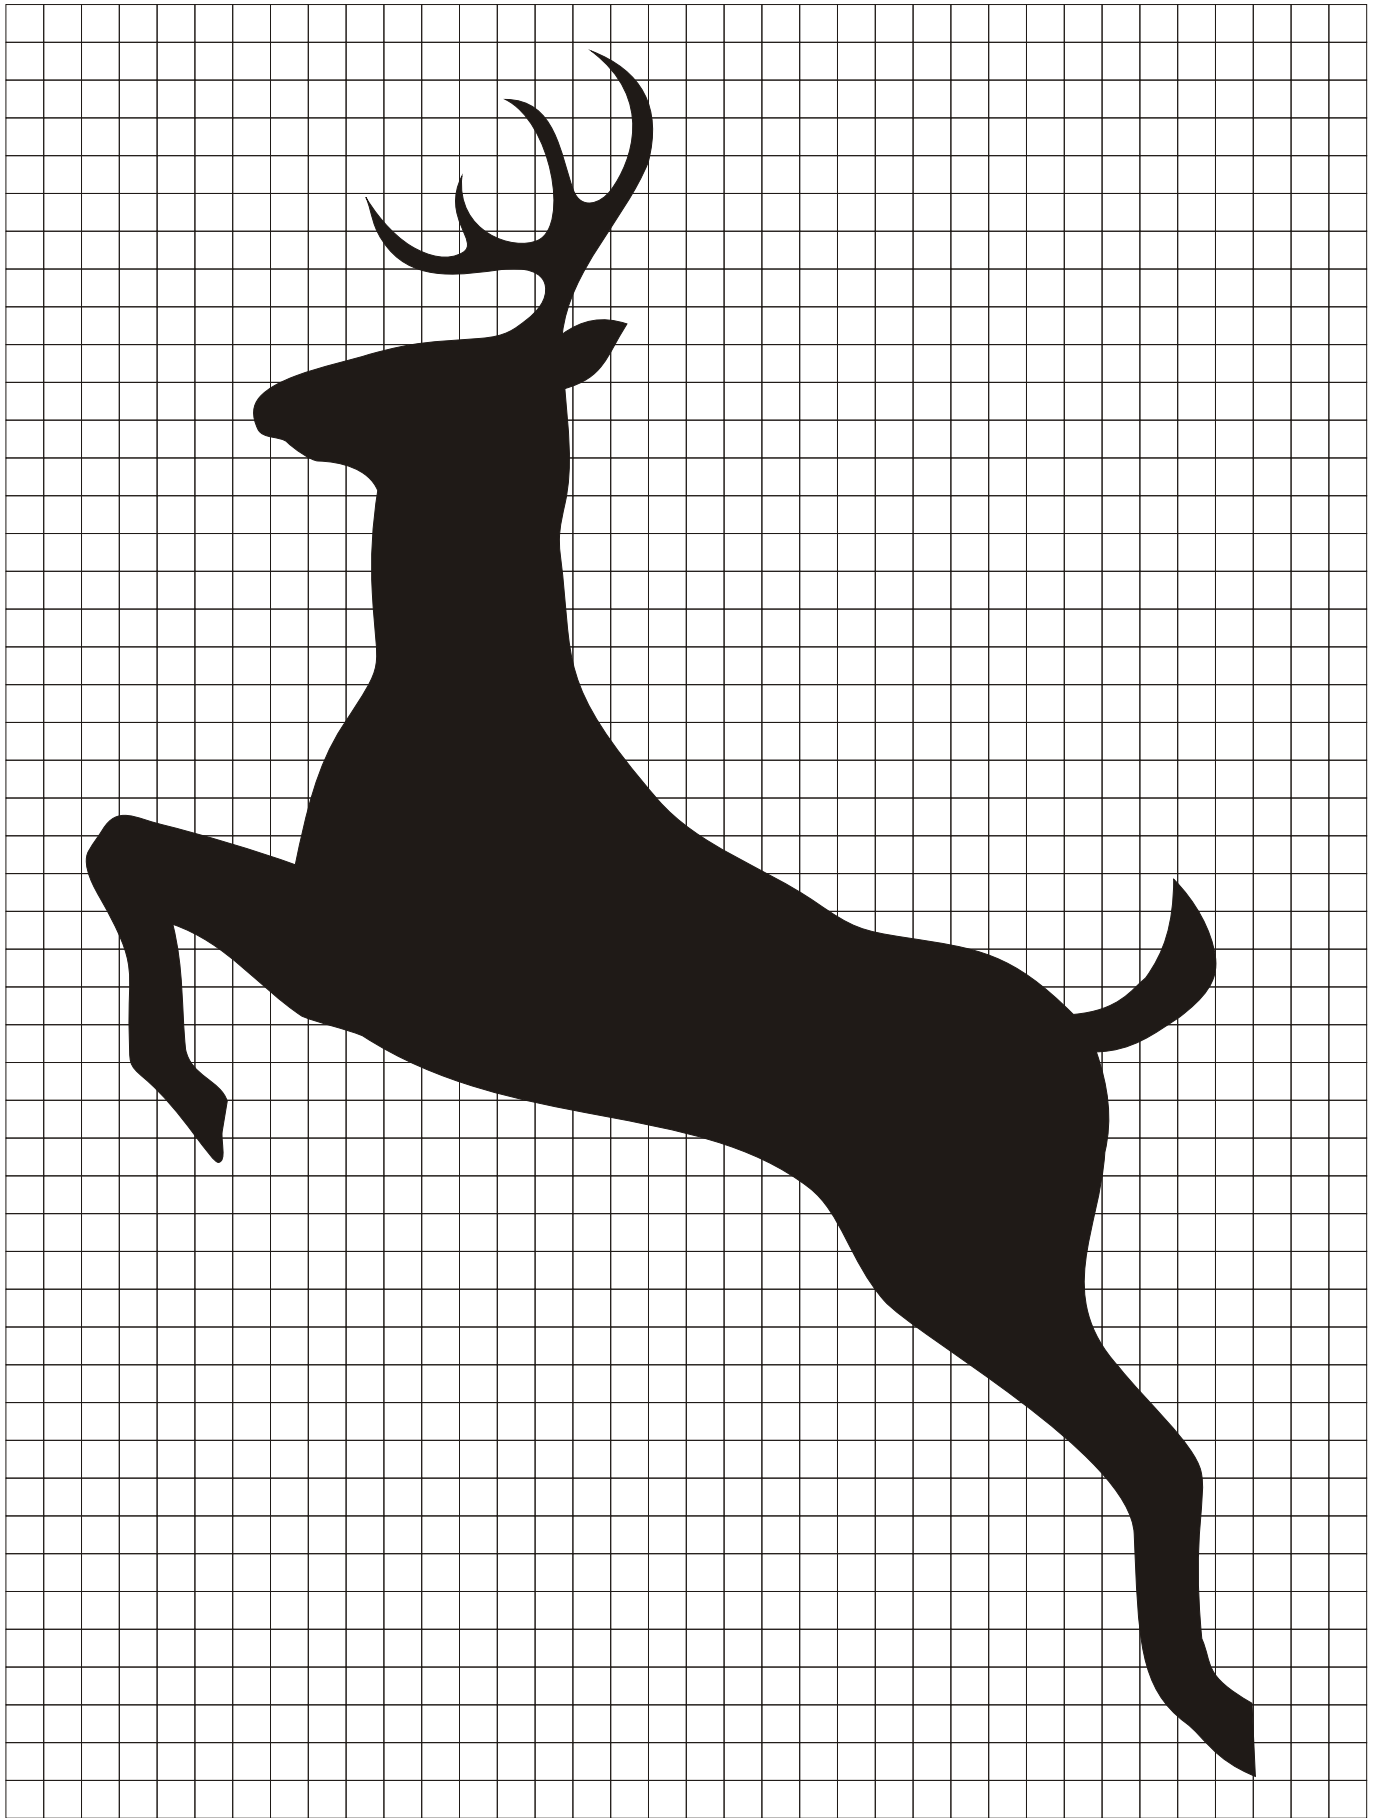


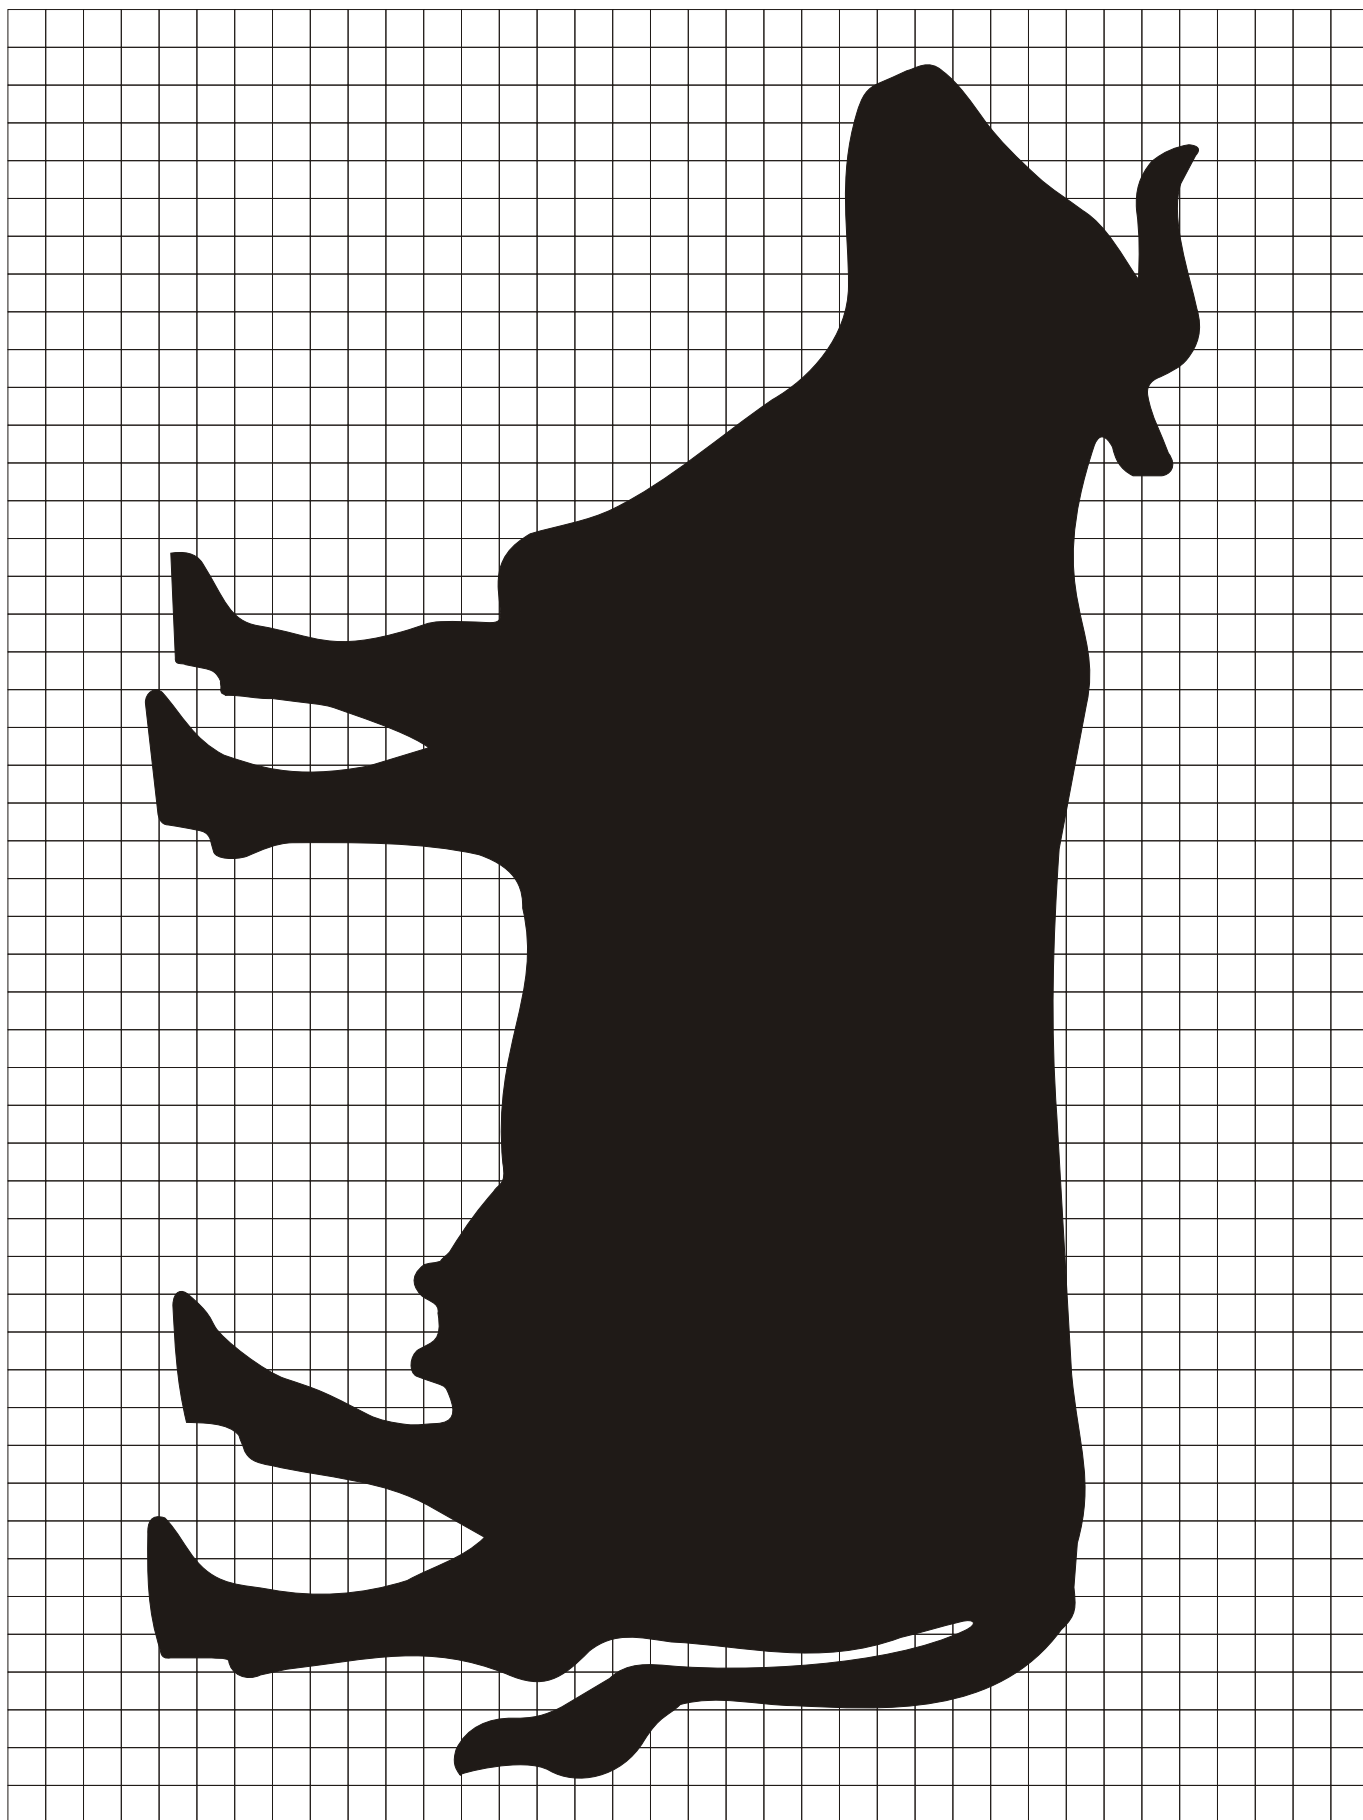


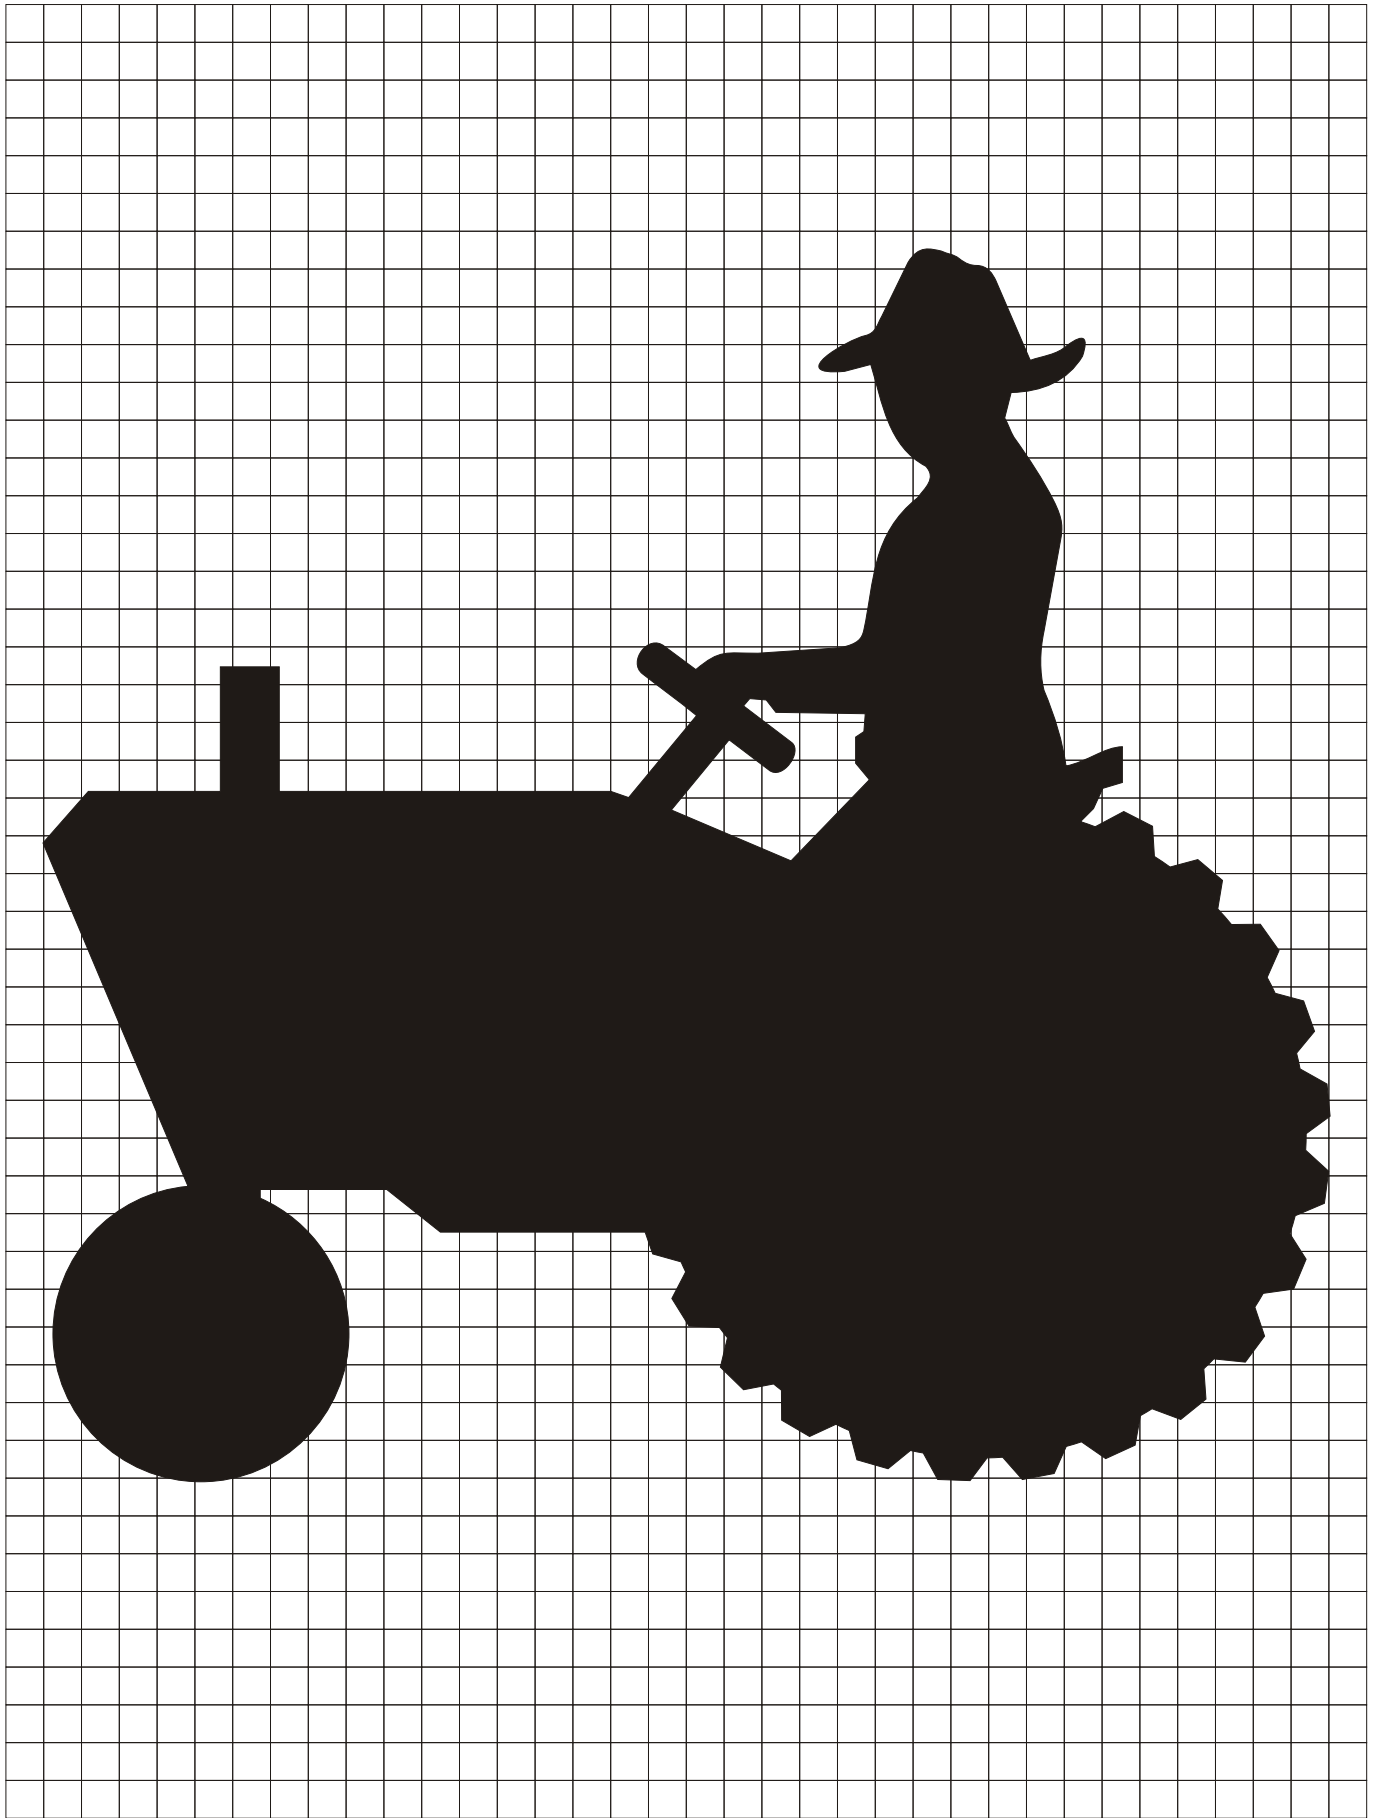

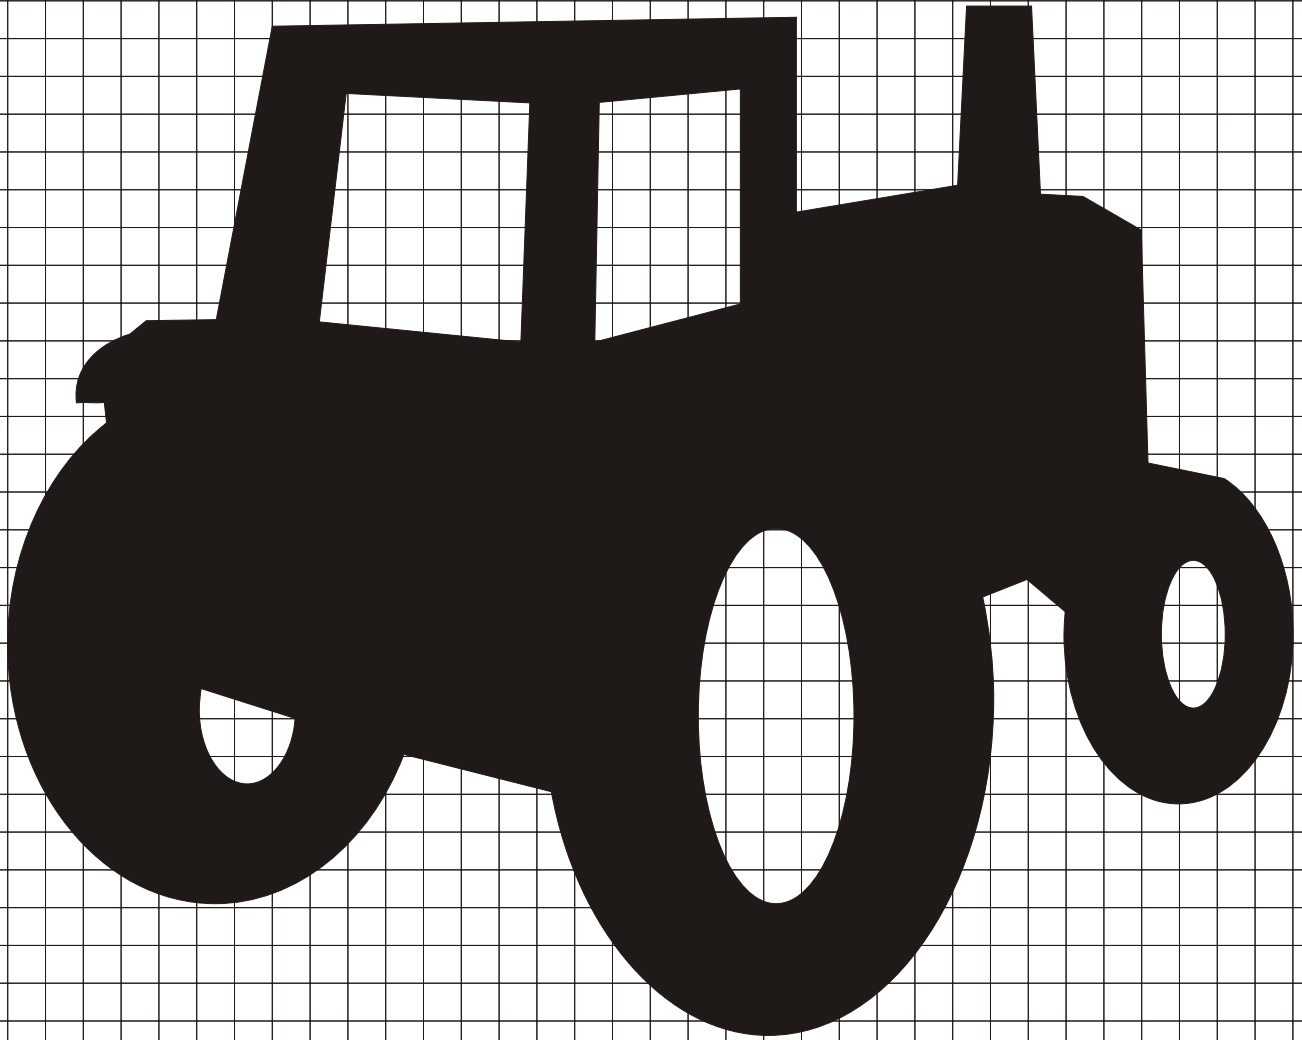


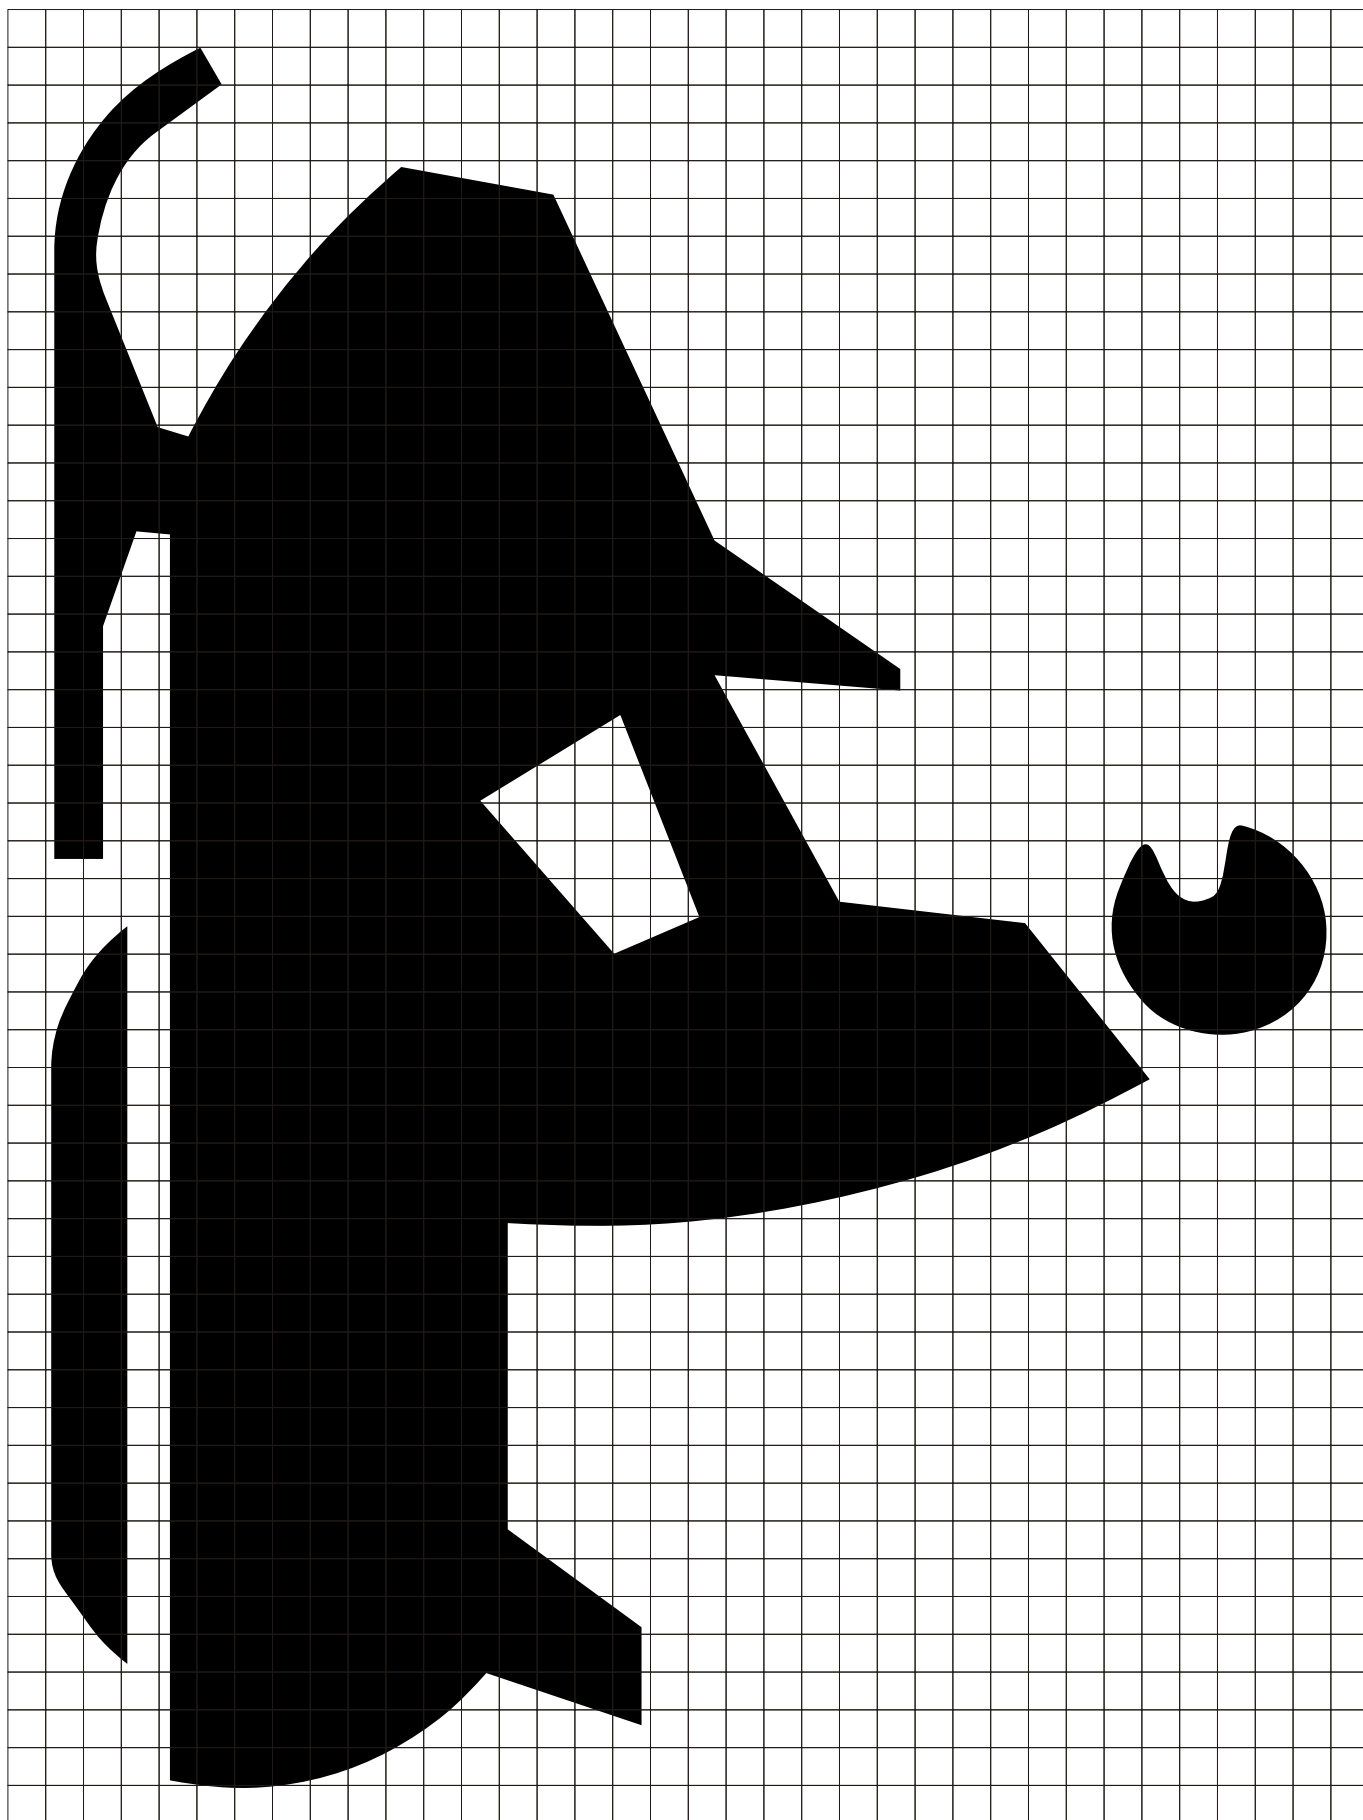


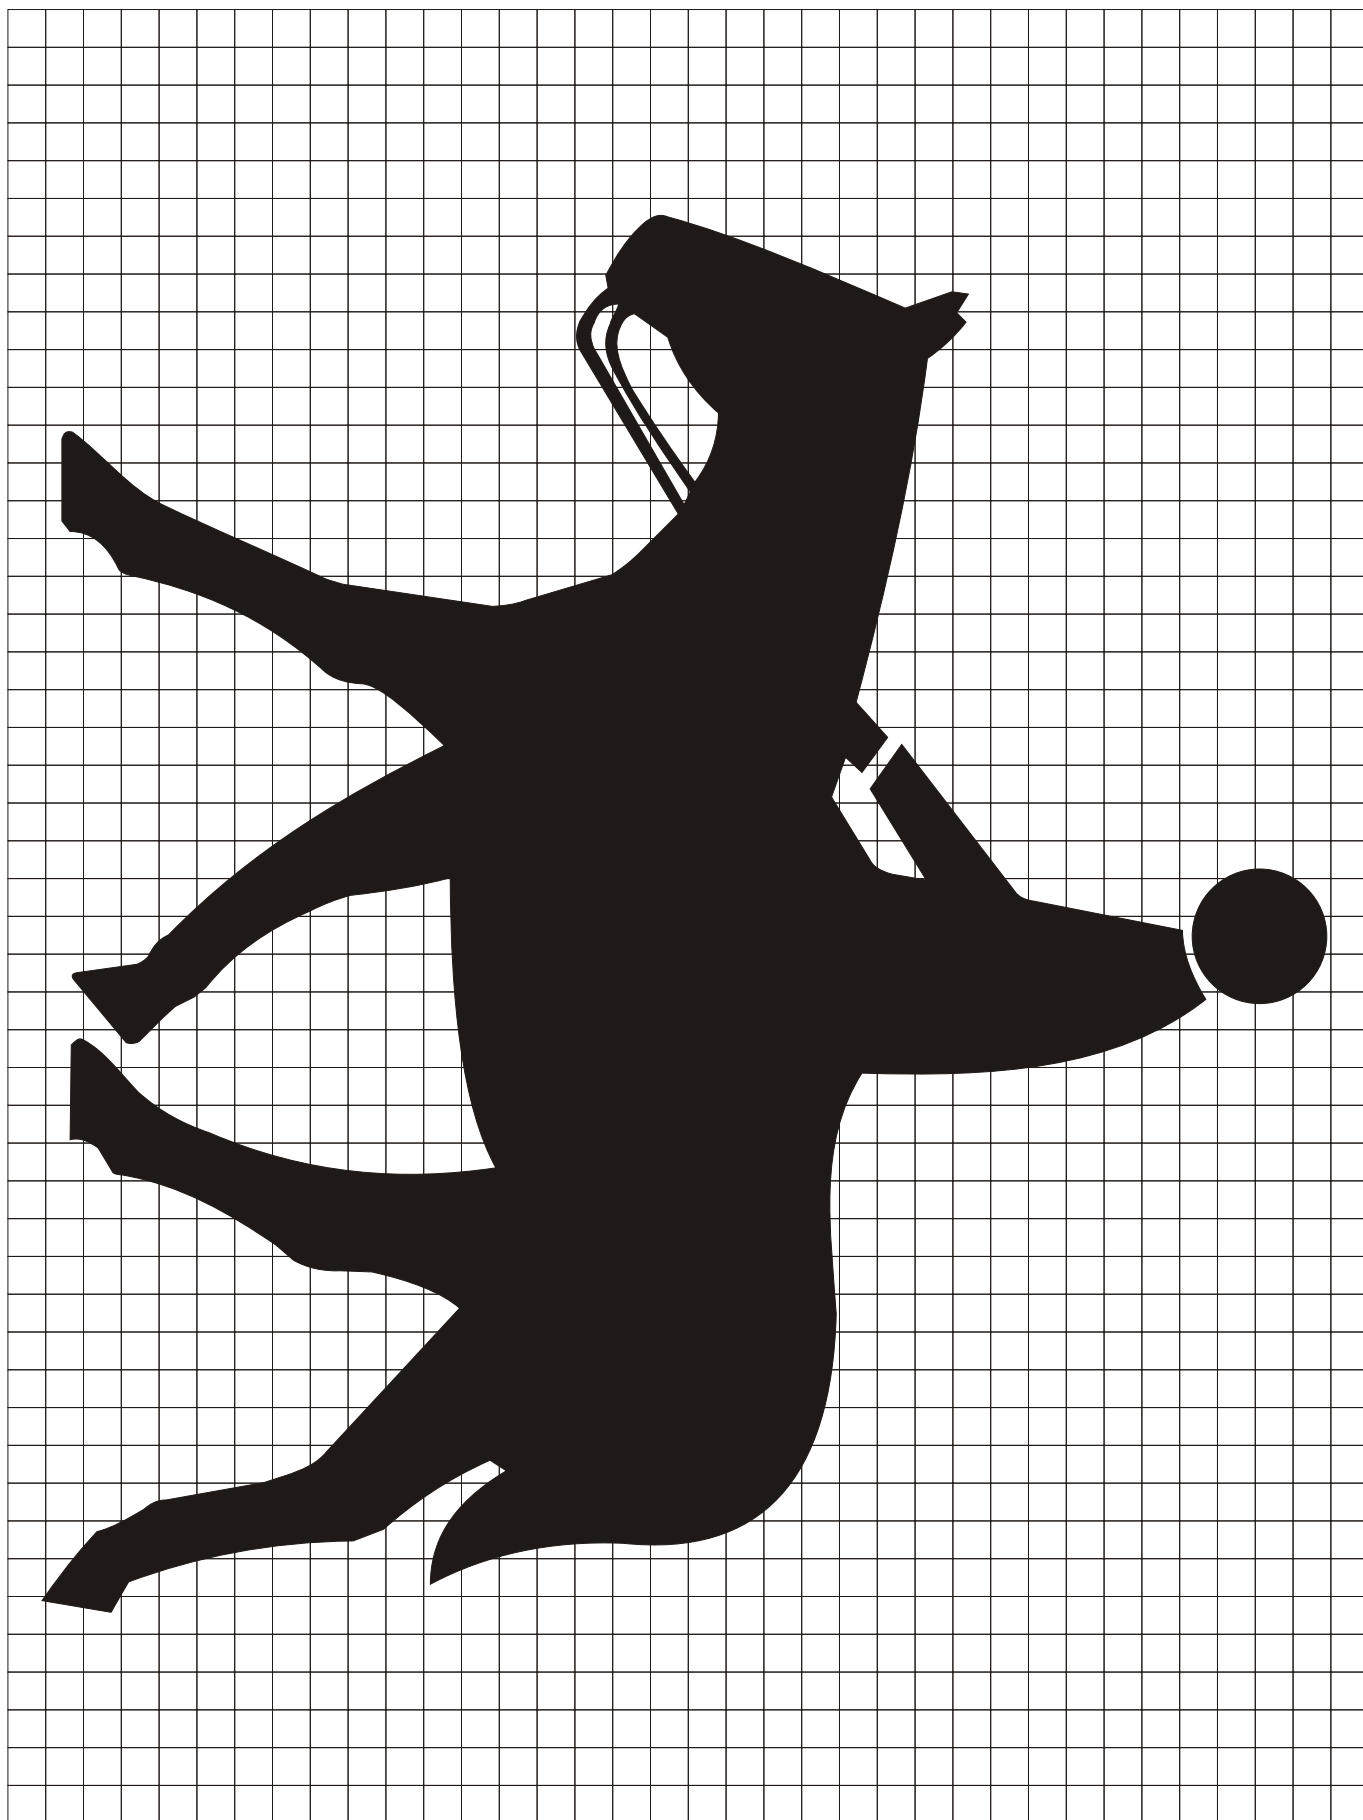


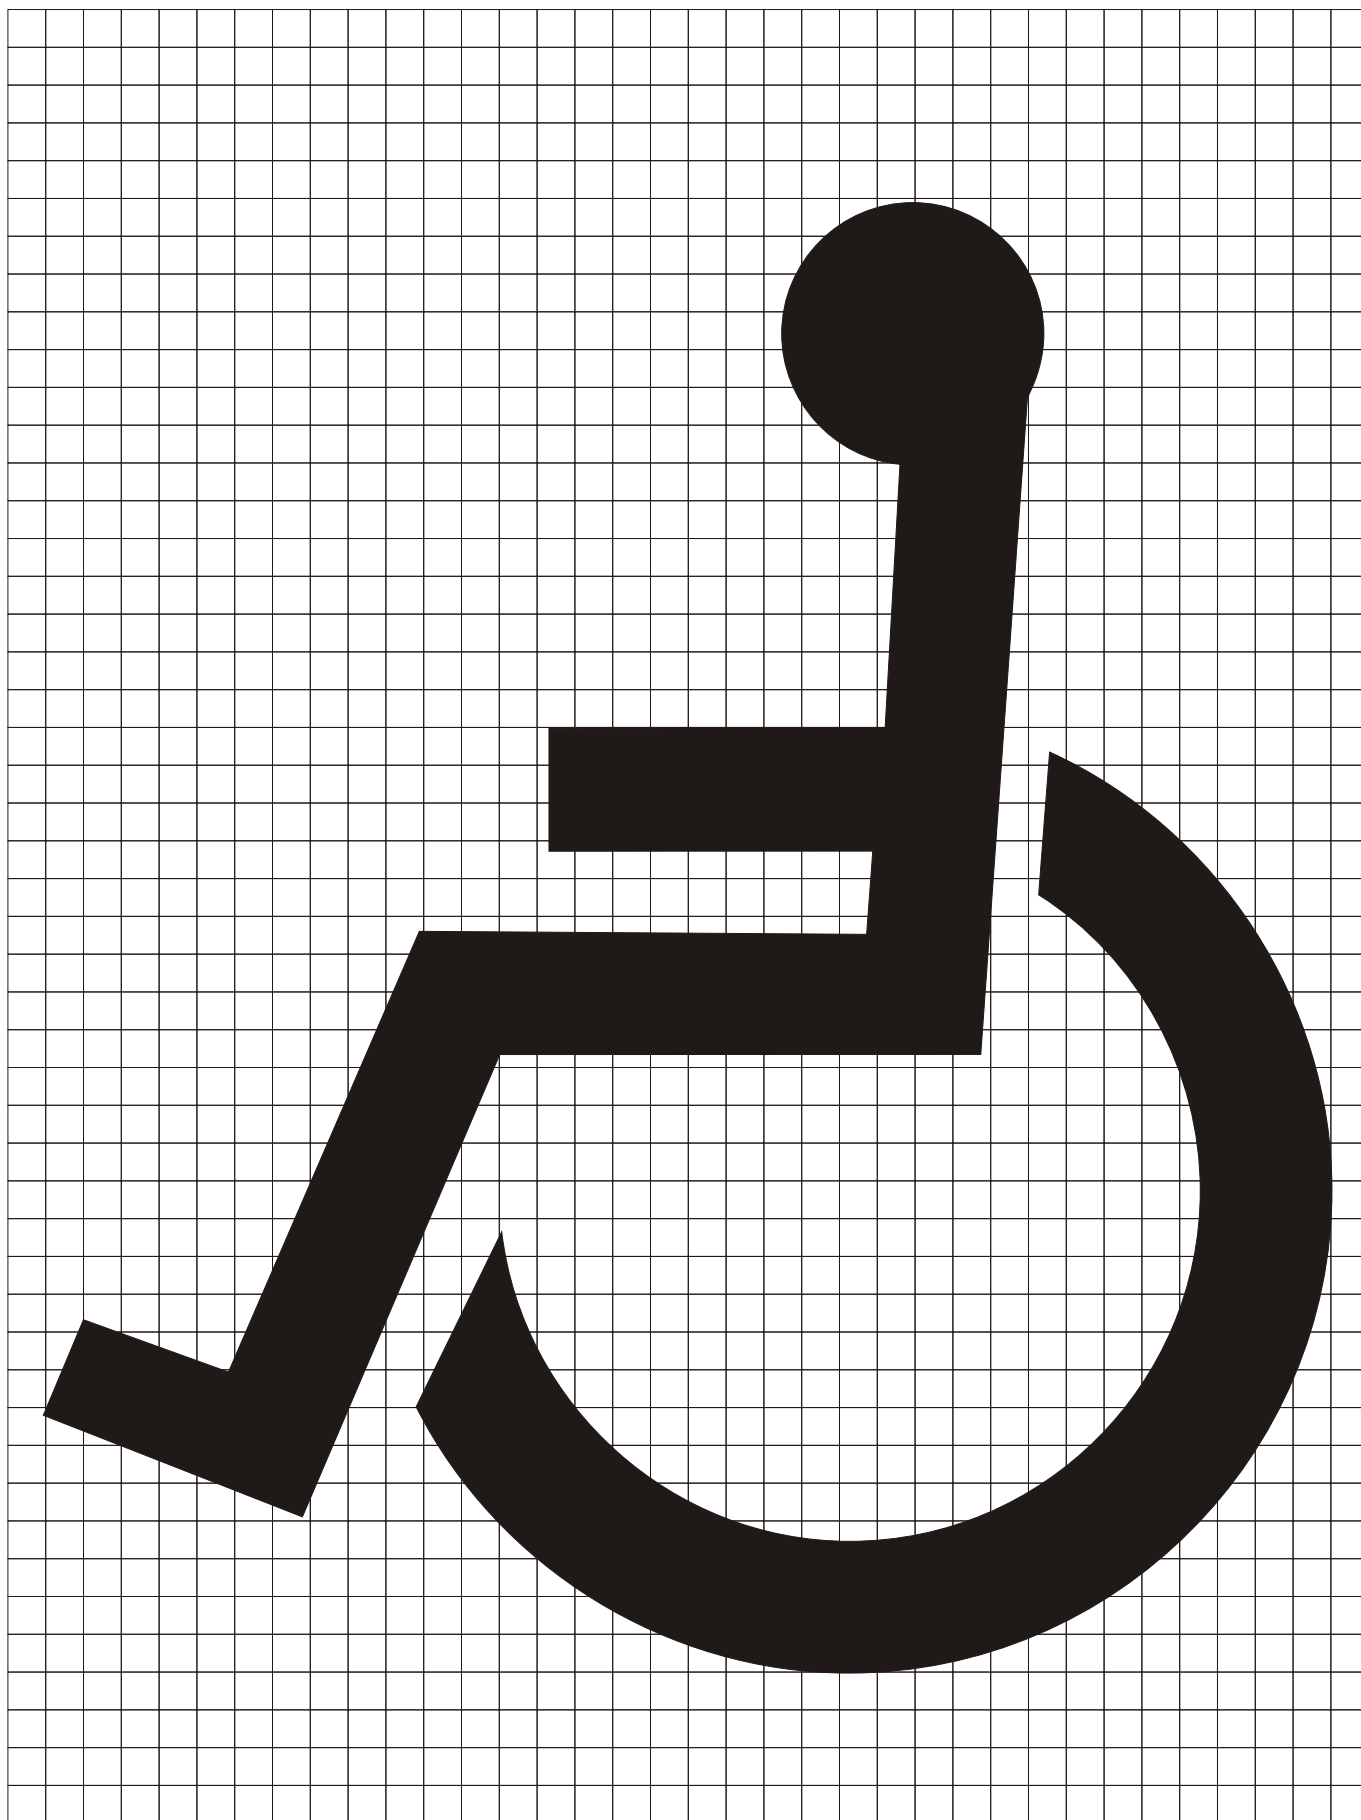



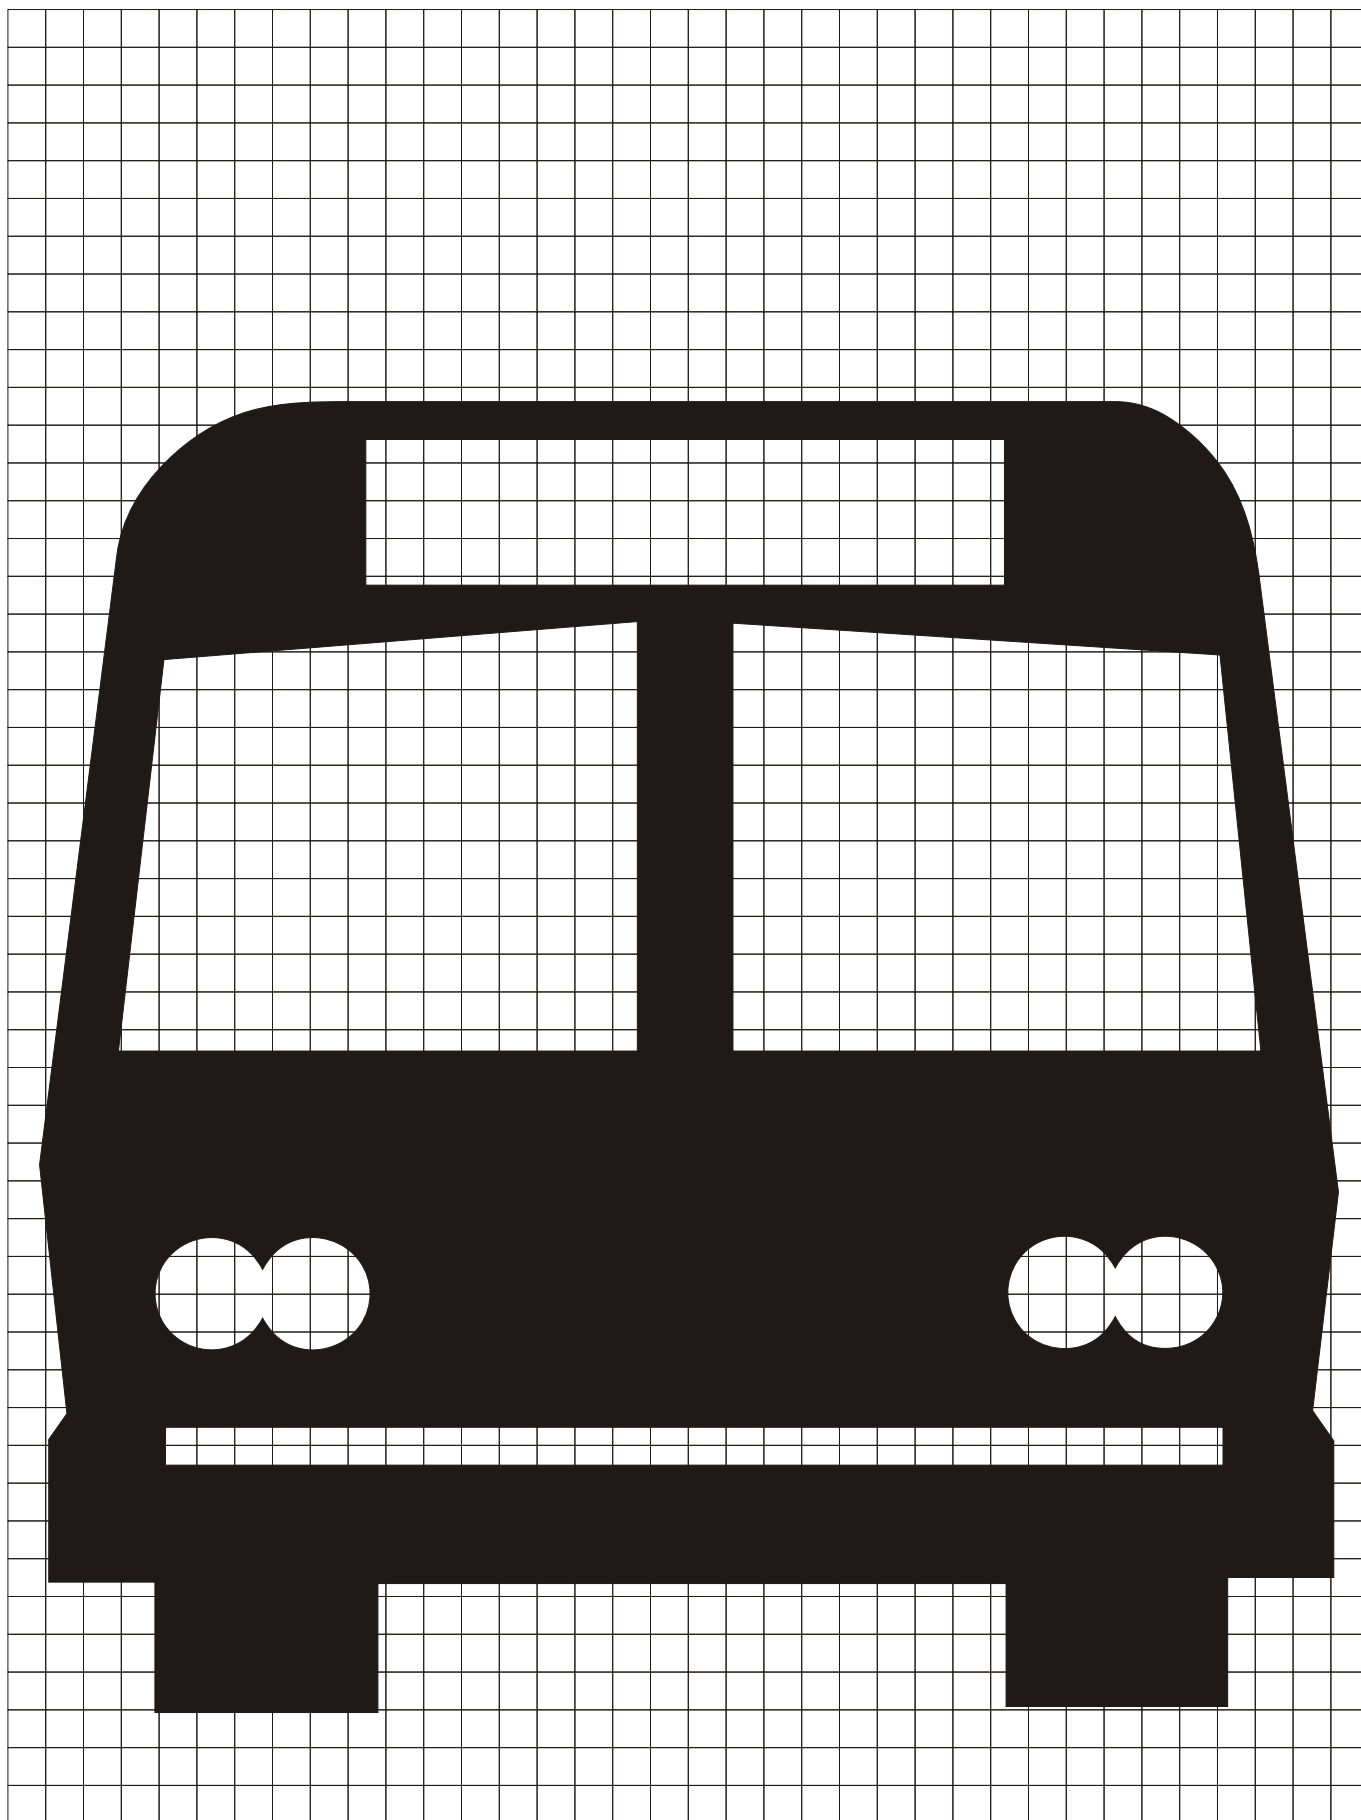


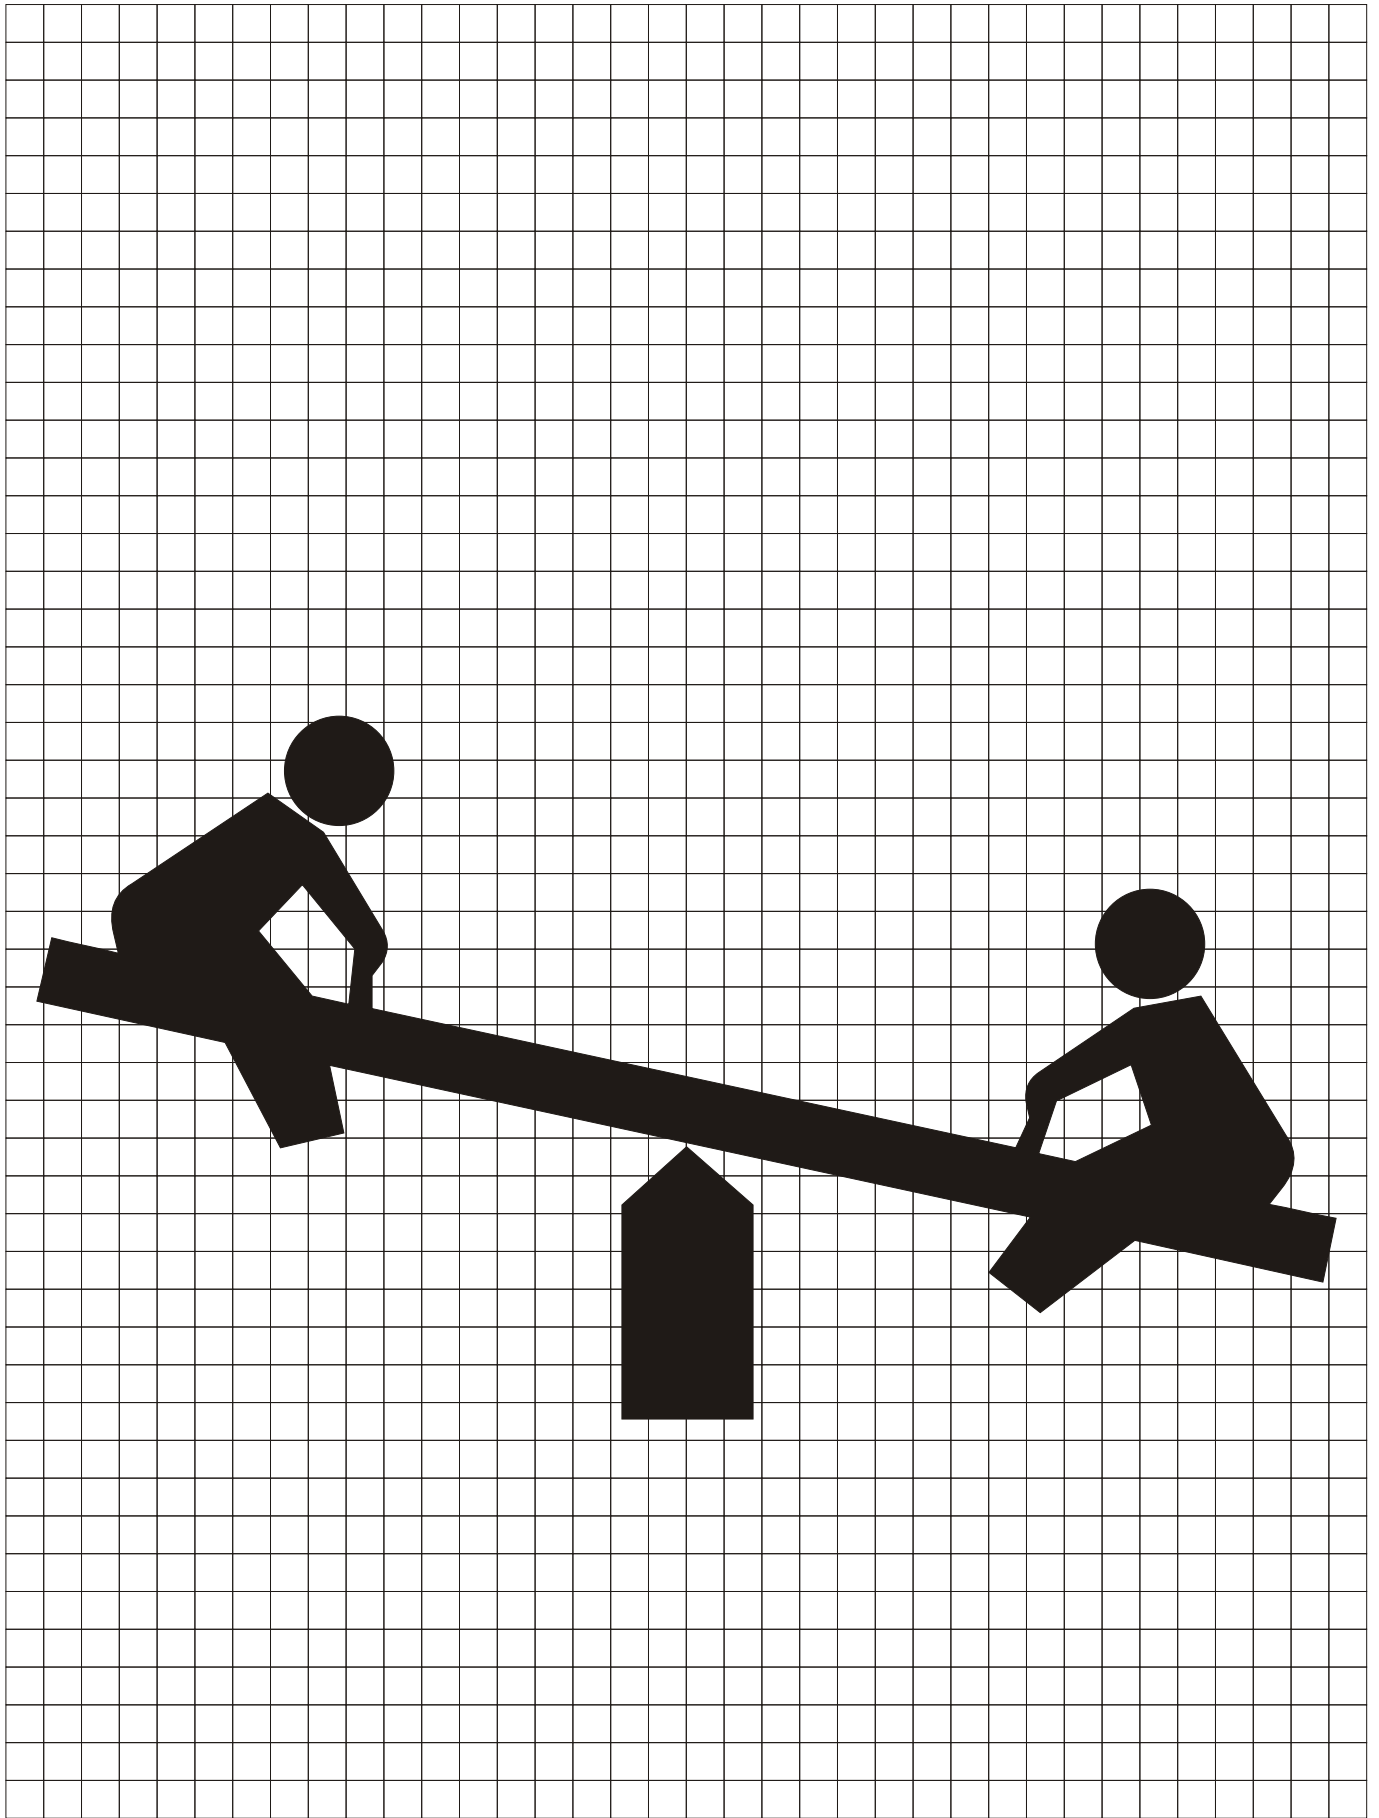


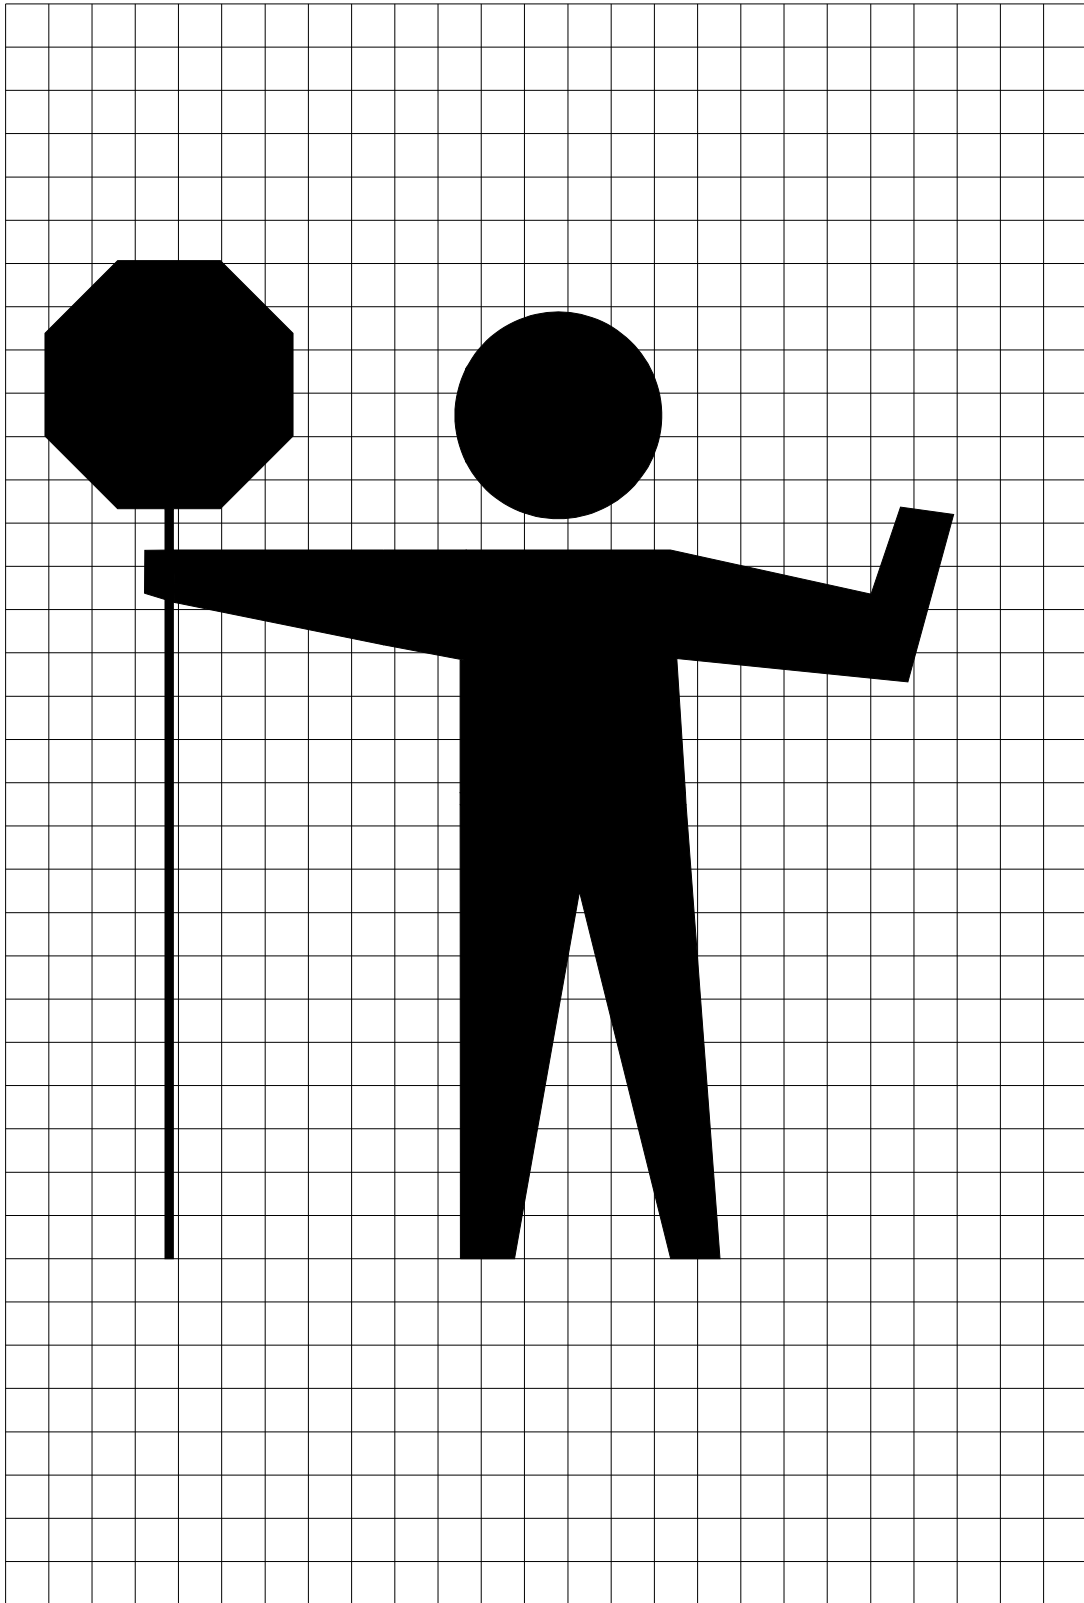


MI/2006


6-35 (MI)

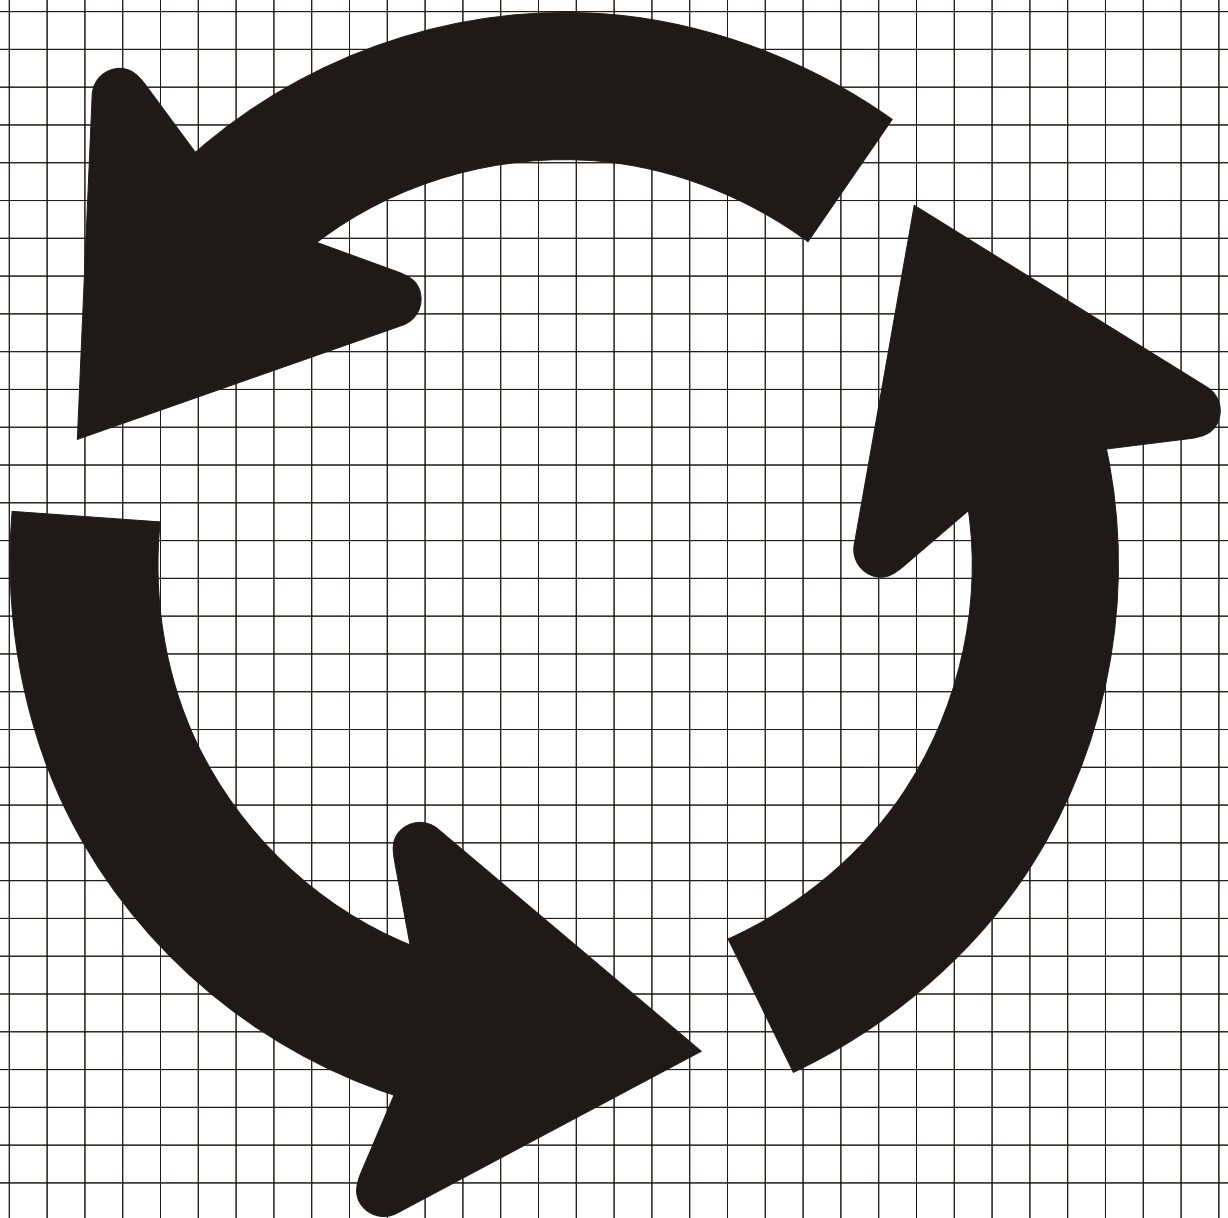

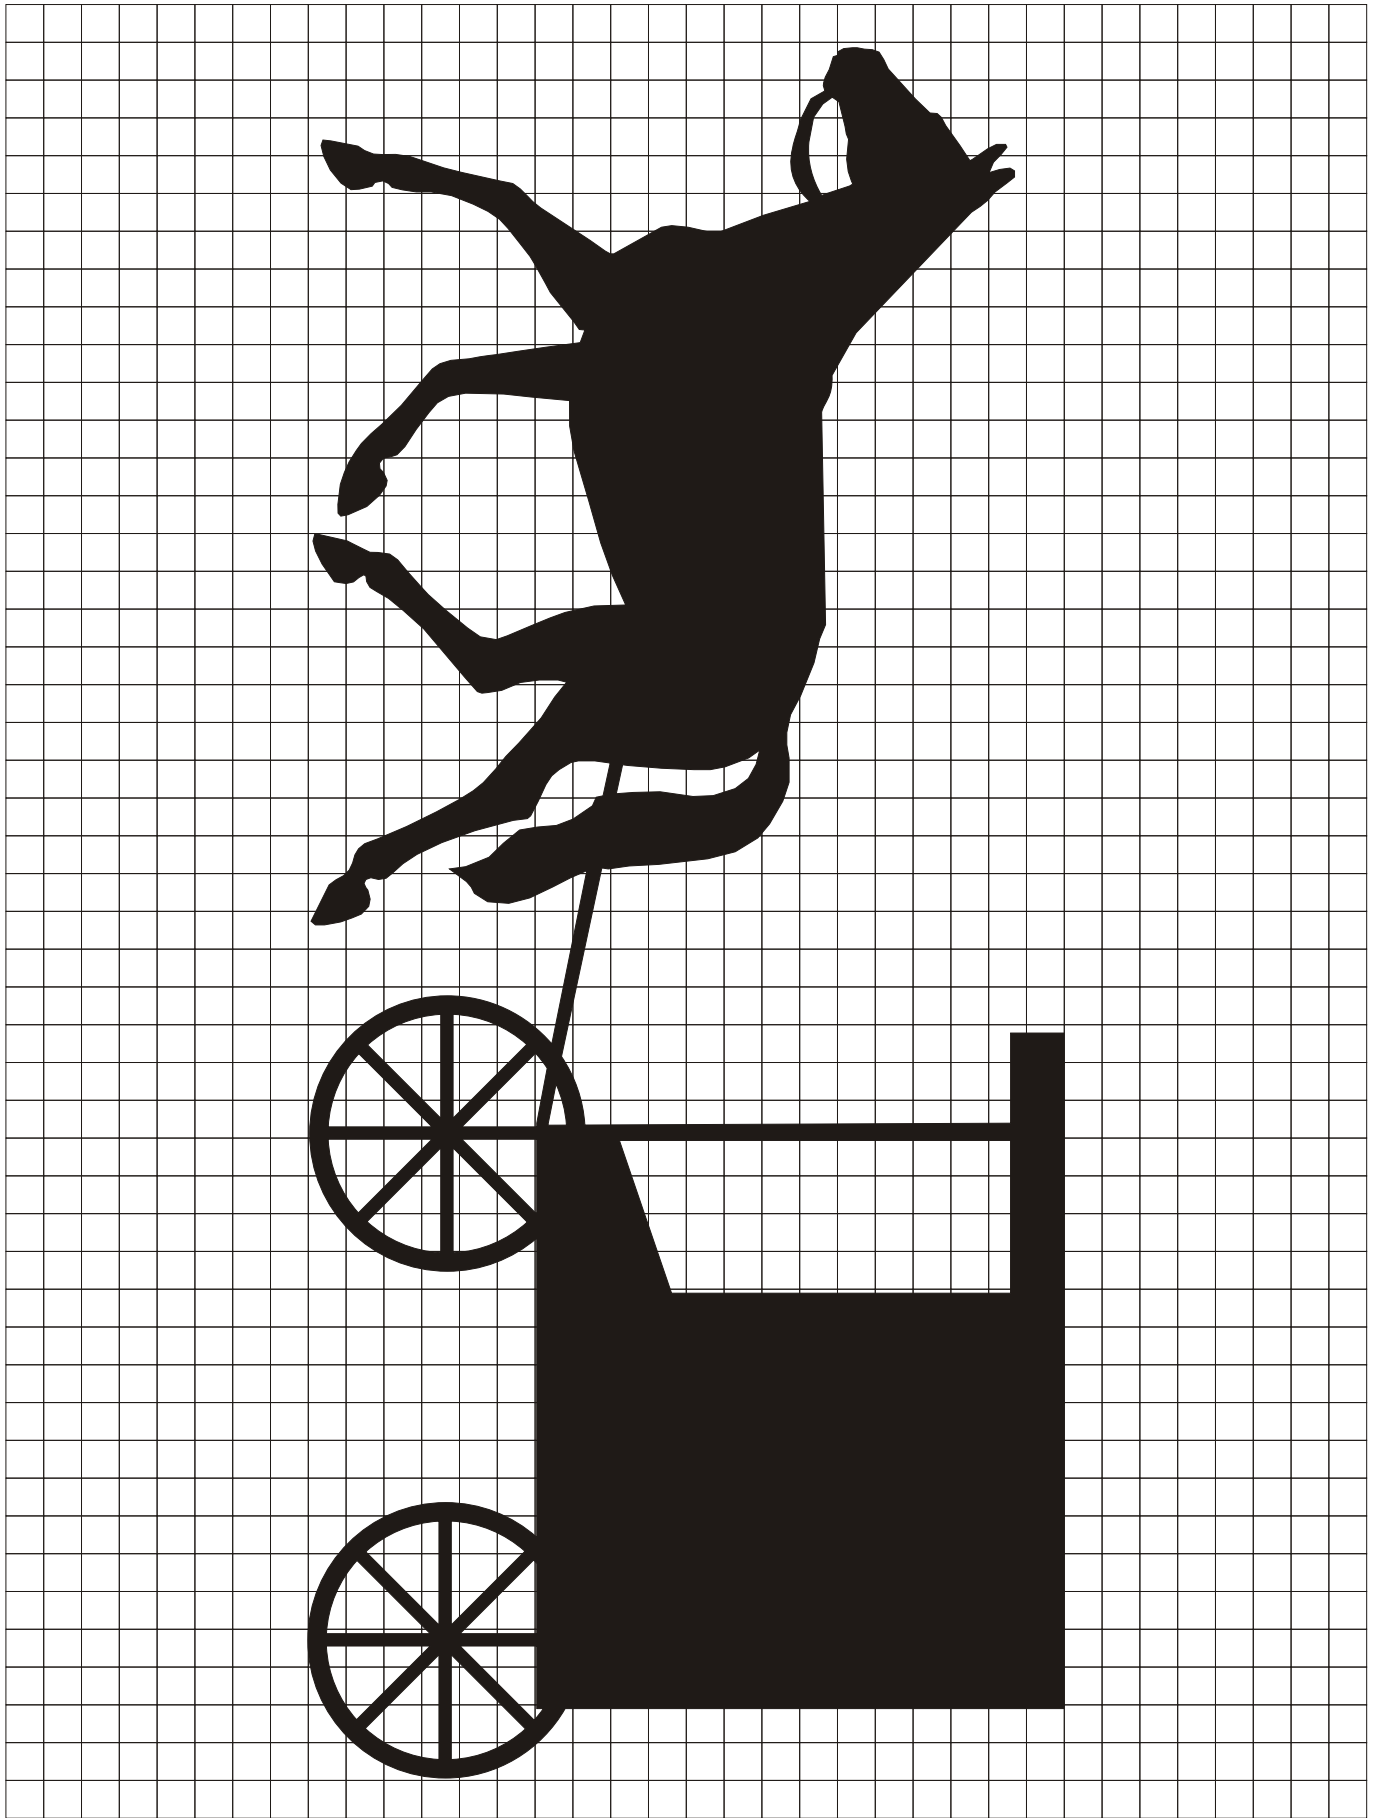



**Navionics
Toro**

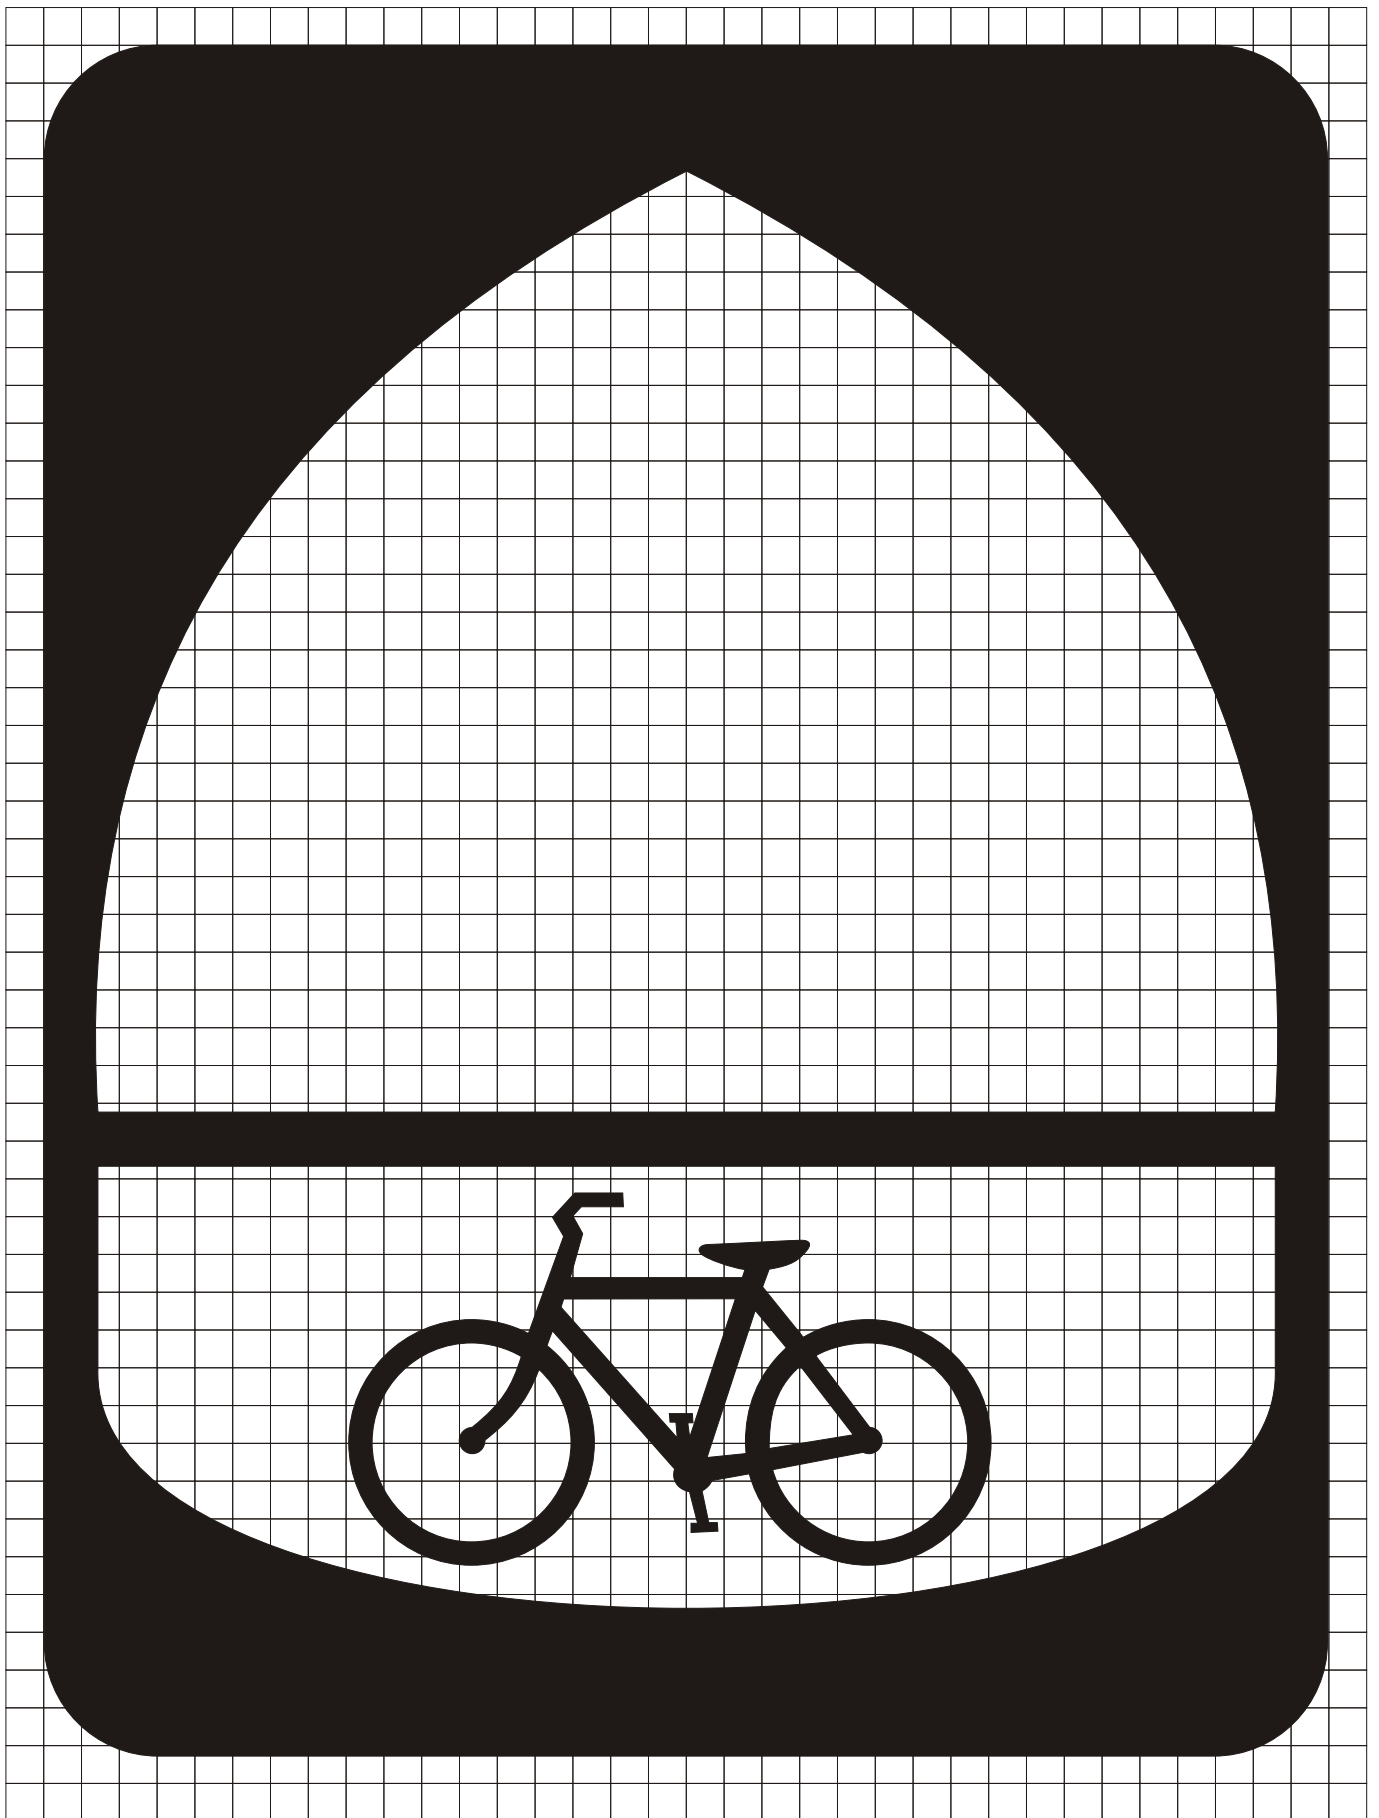

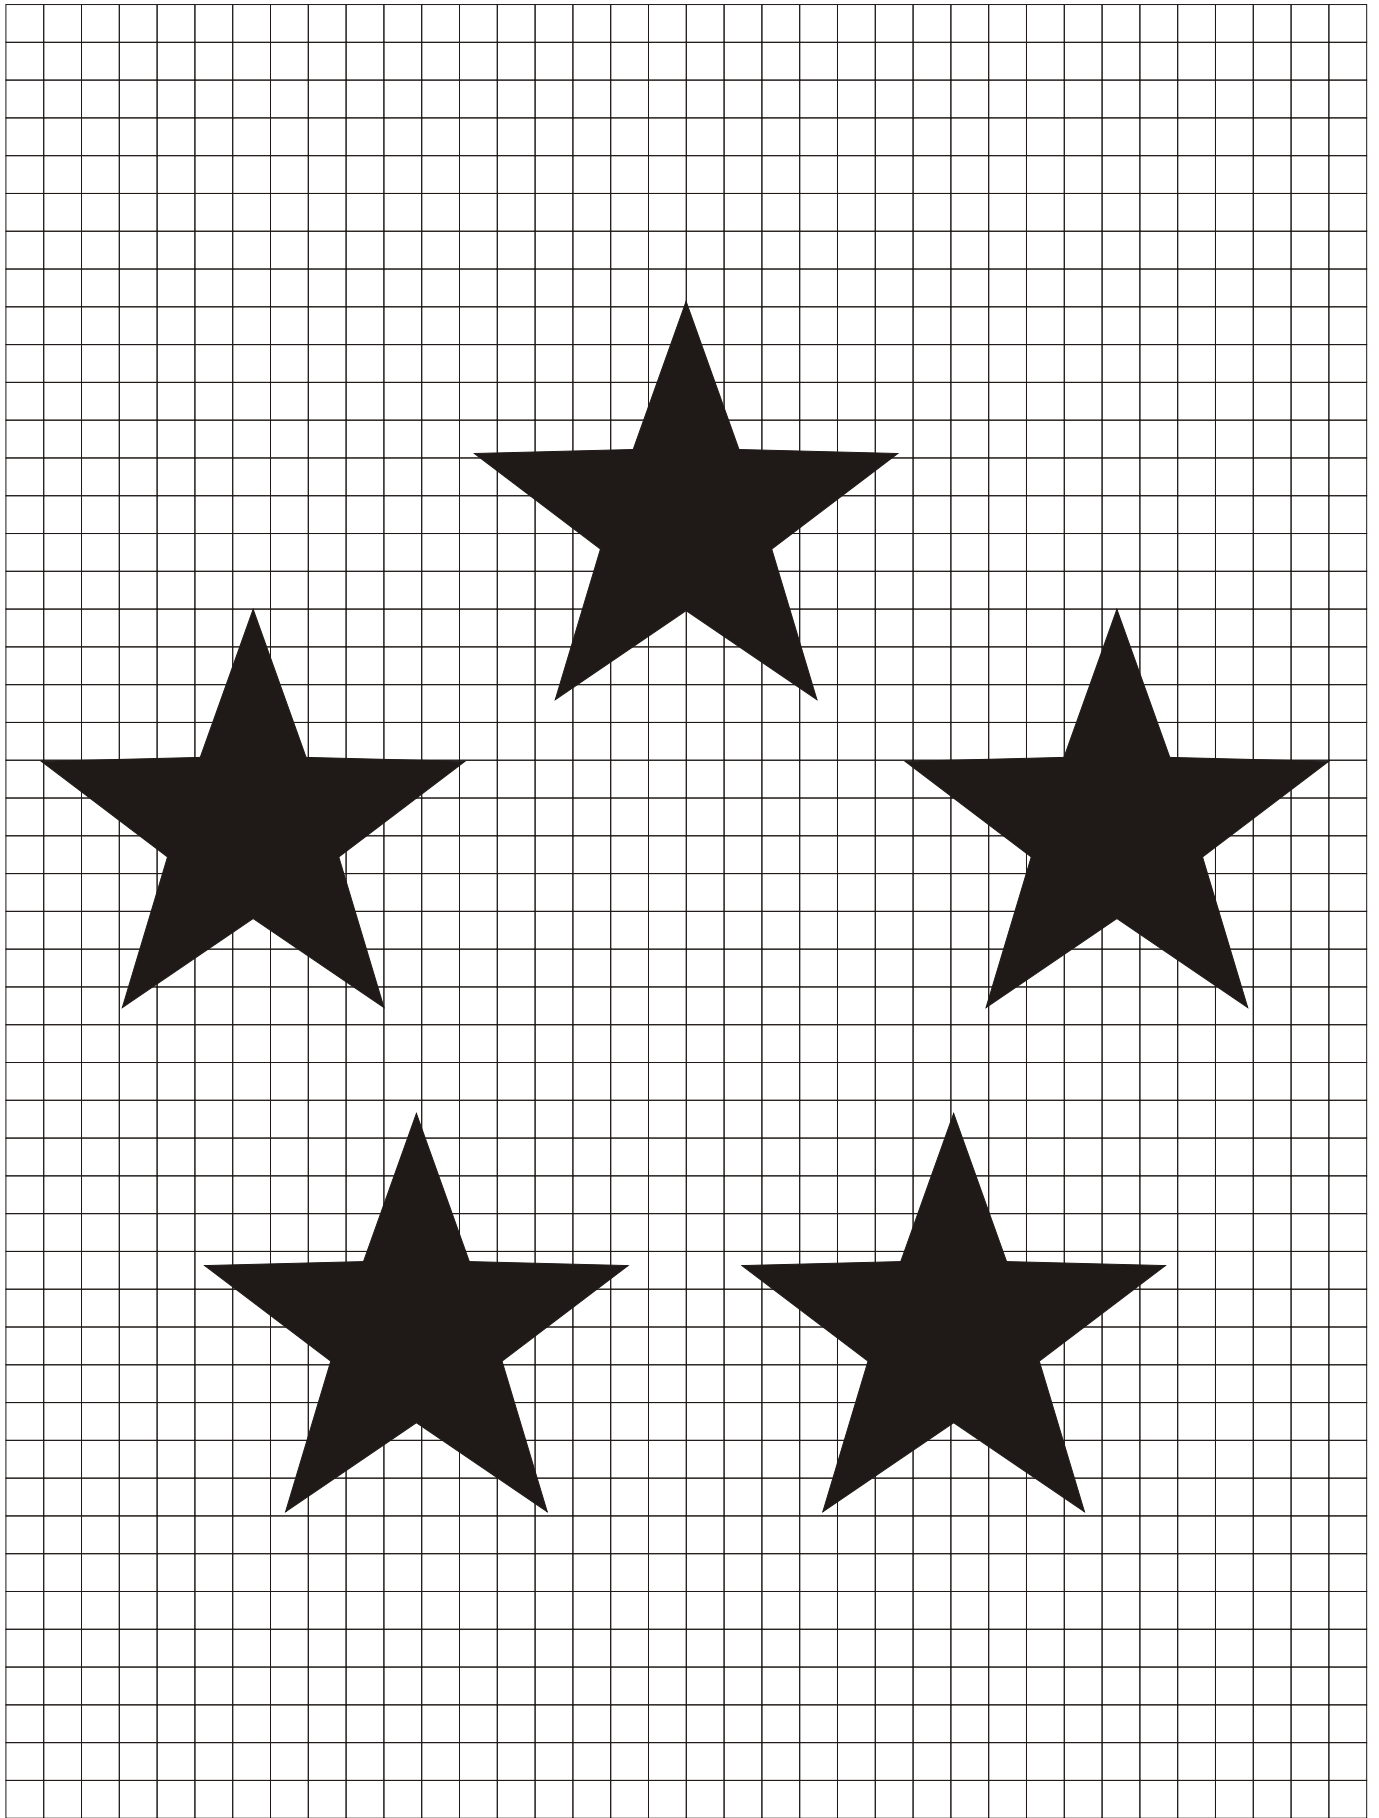



FINITE HOPPER INTERSTATE SYSTEM

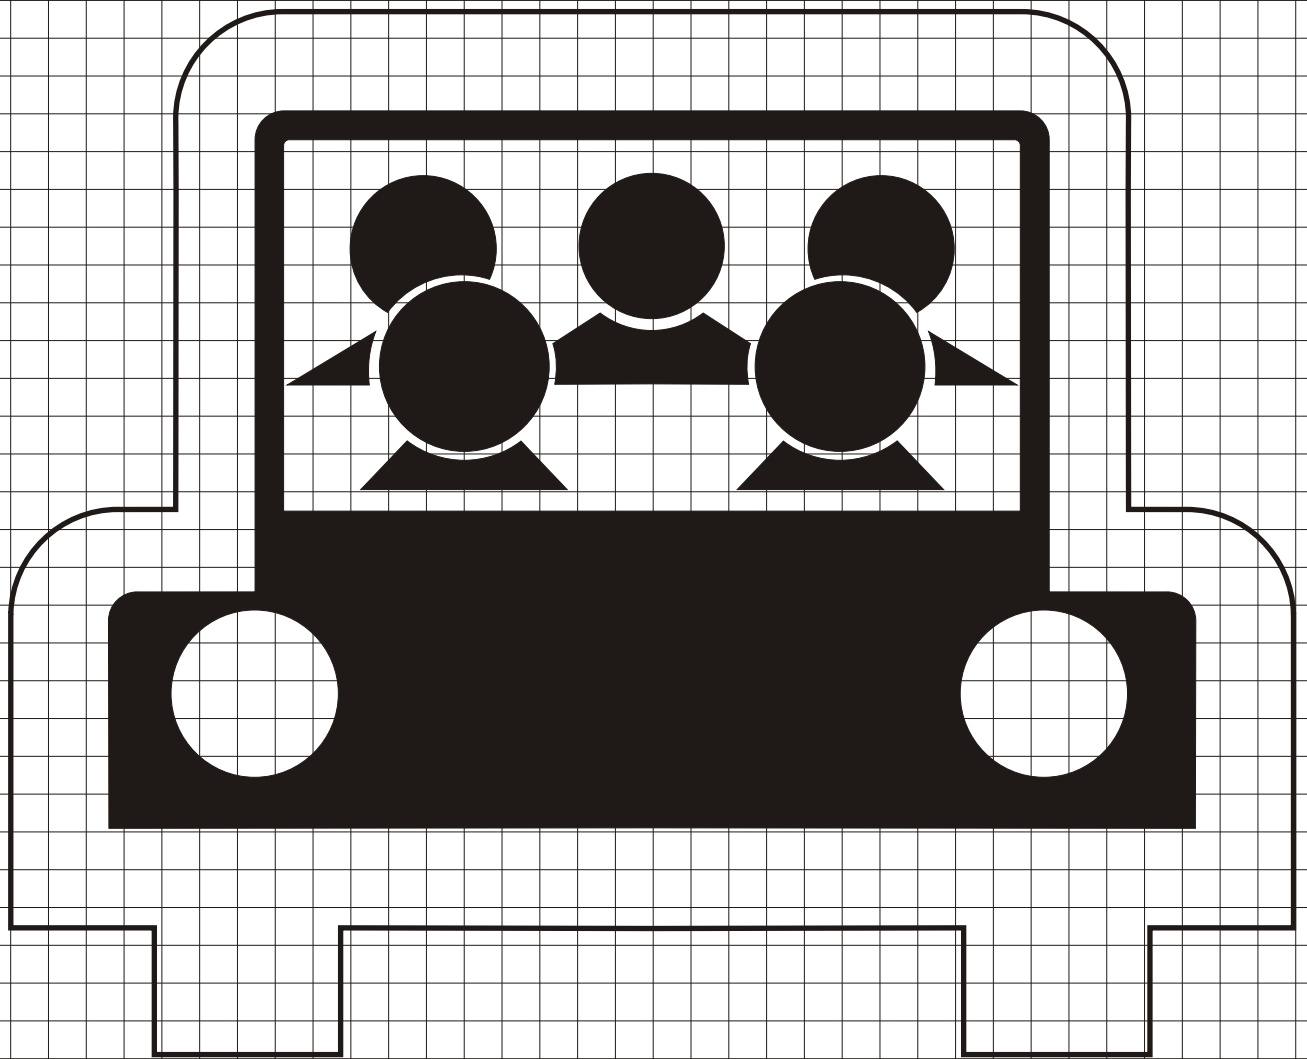


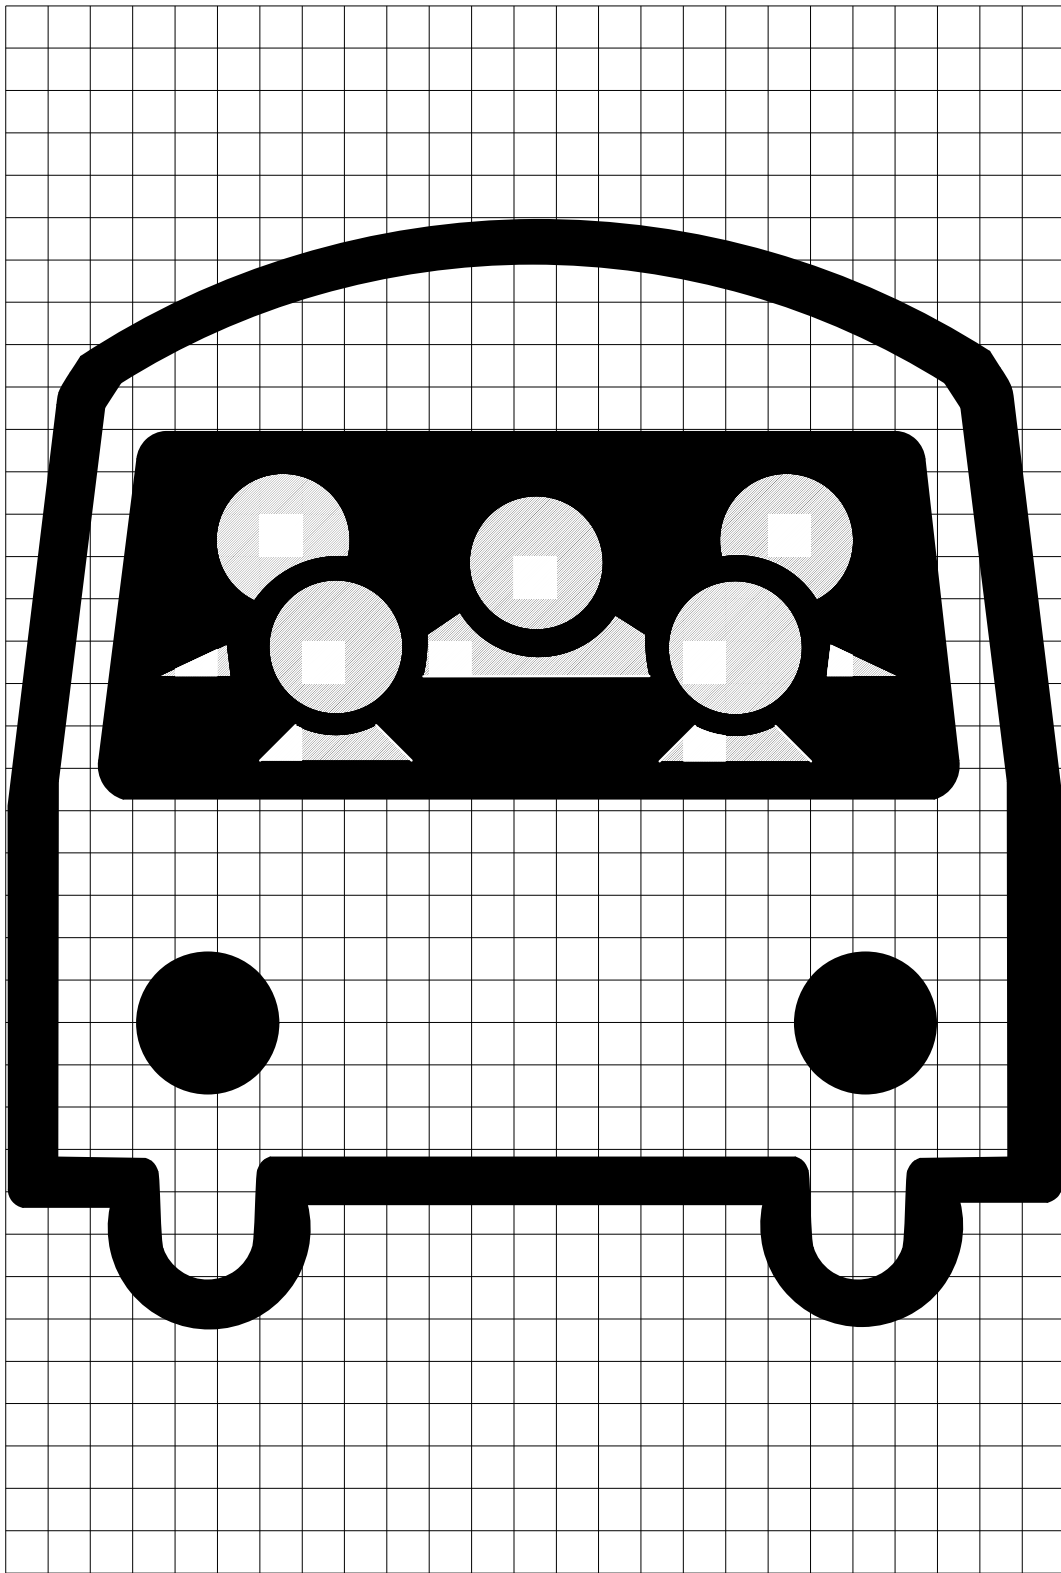



6-42.1 (MI)

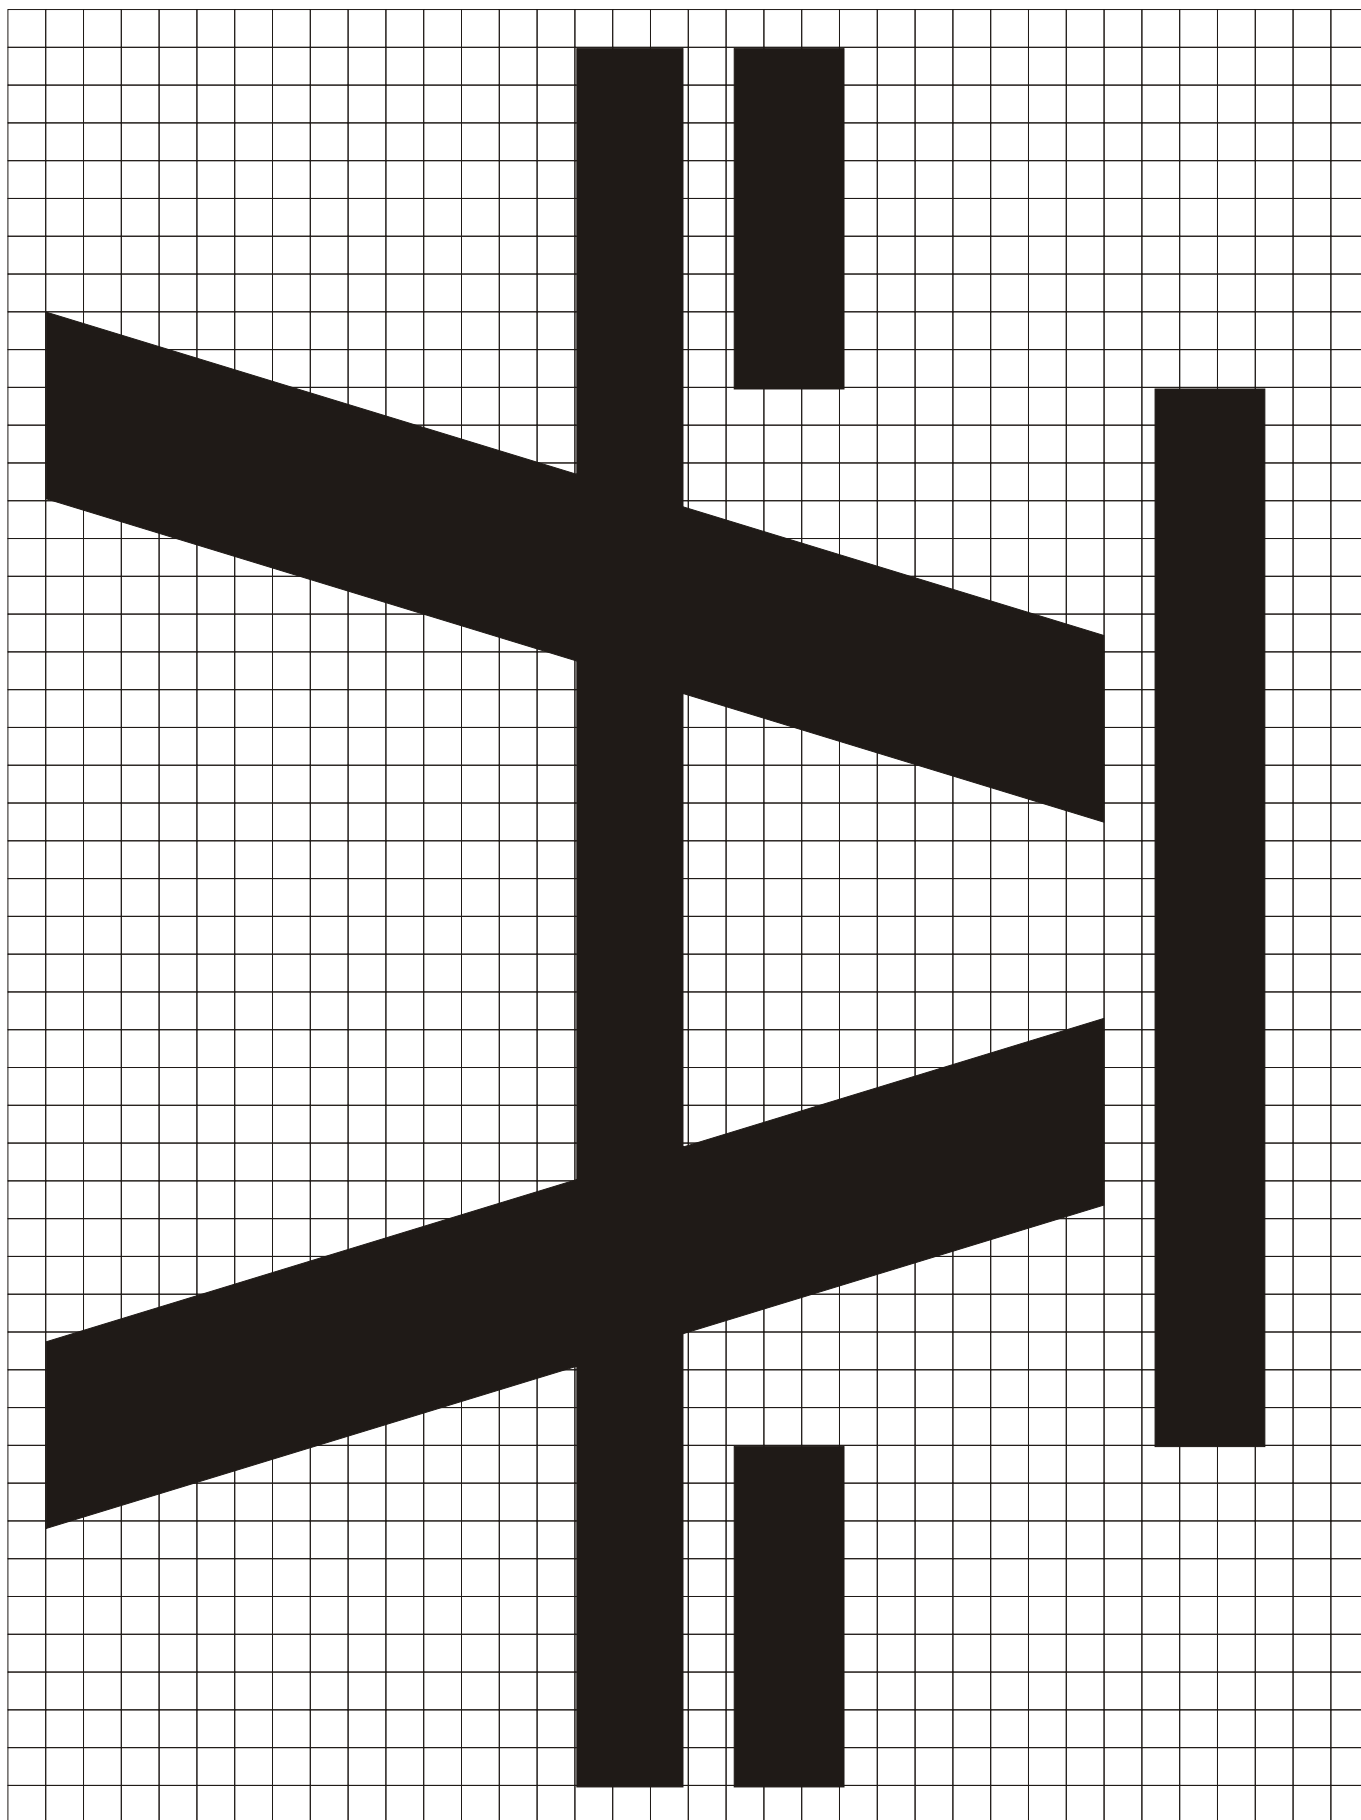


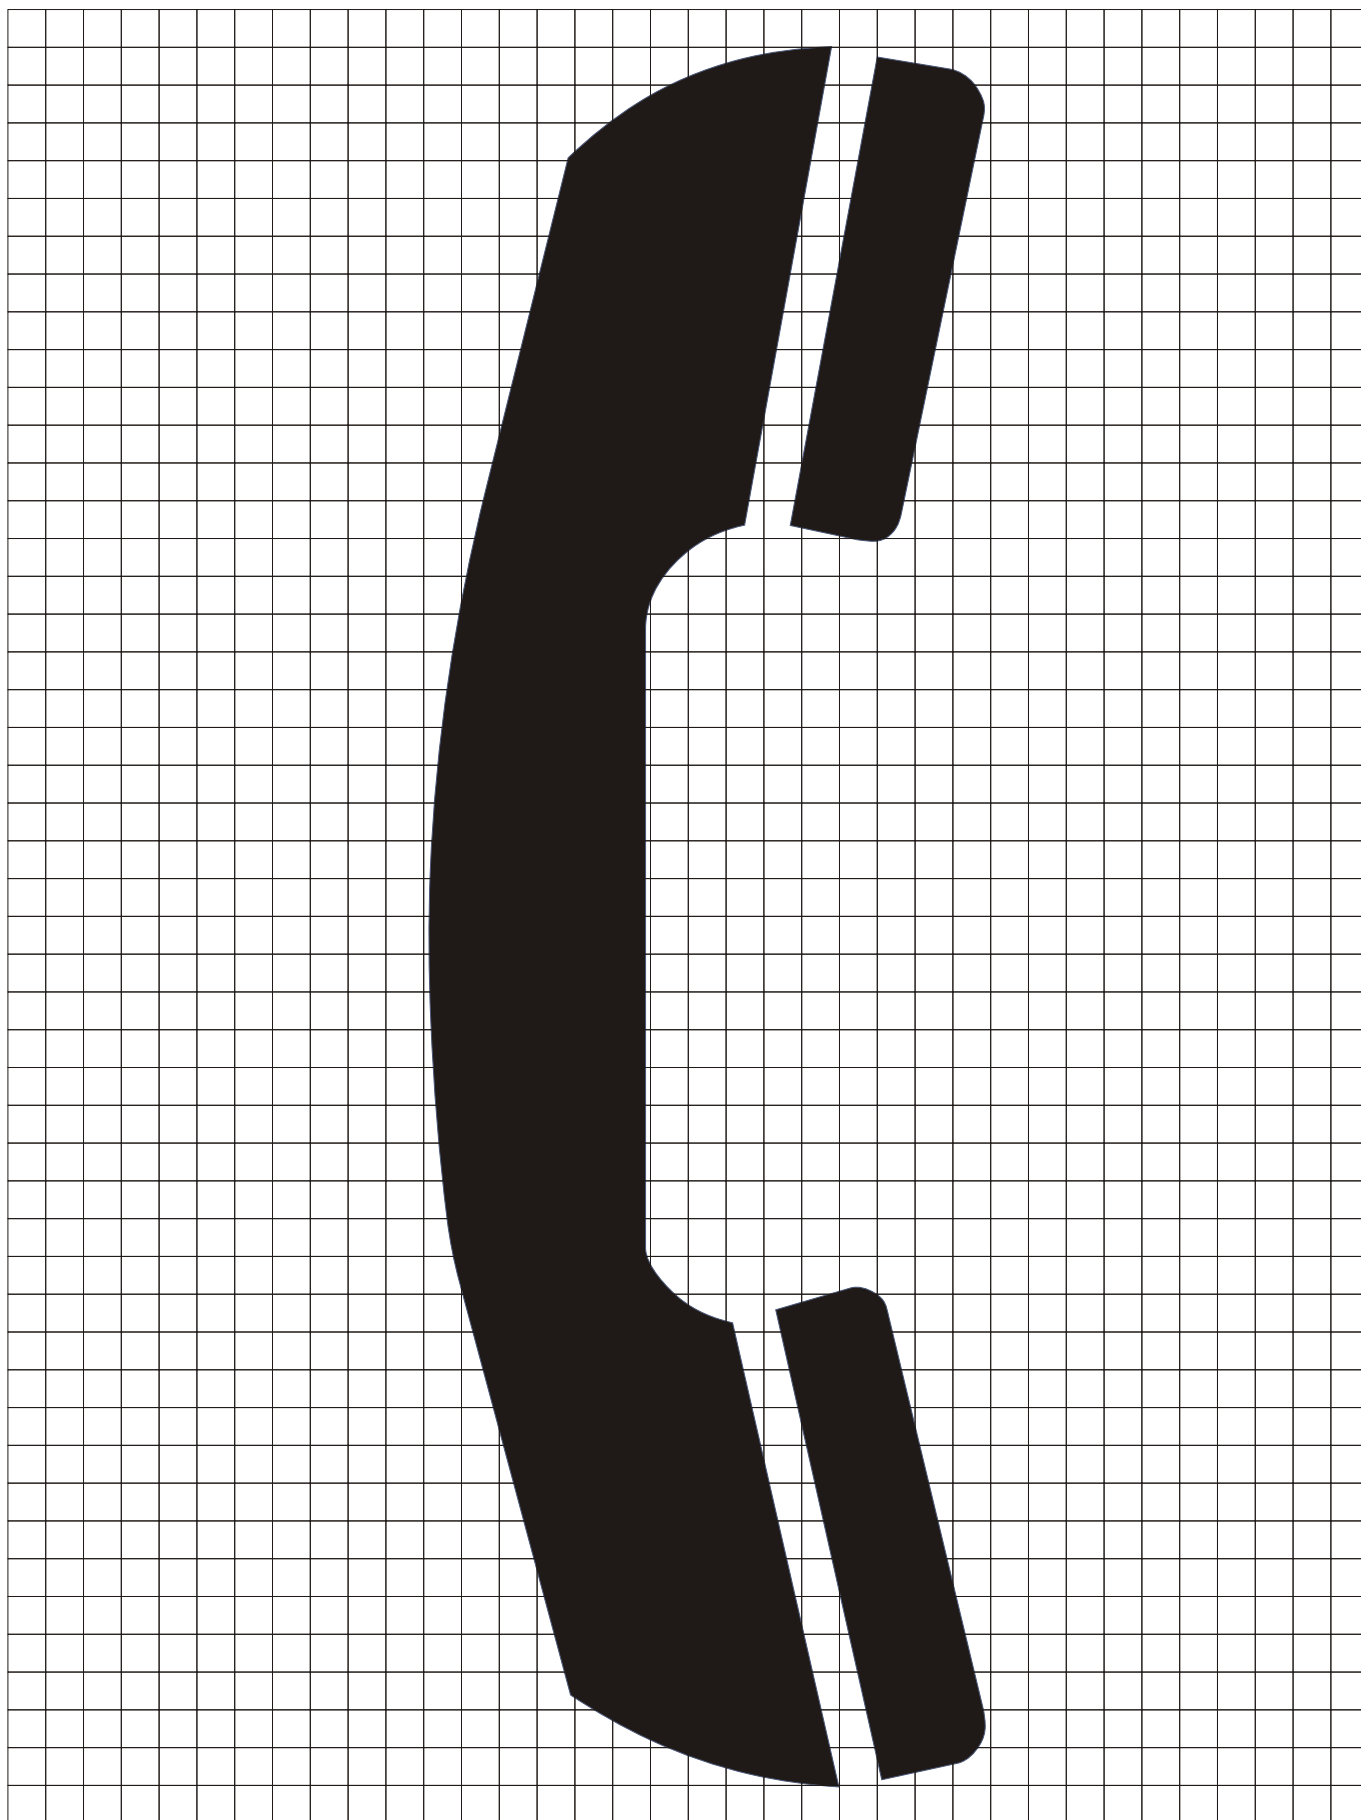

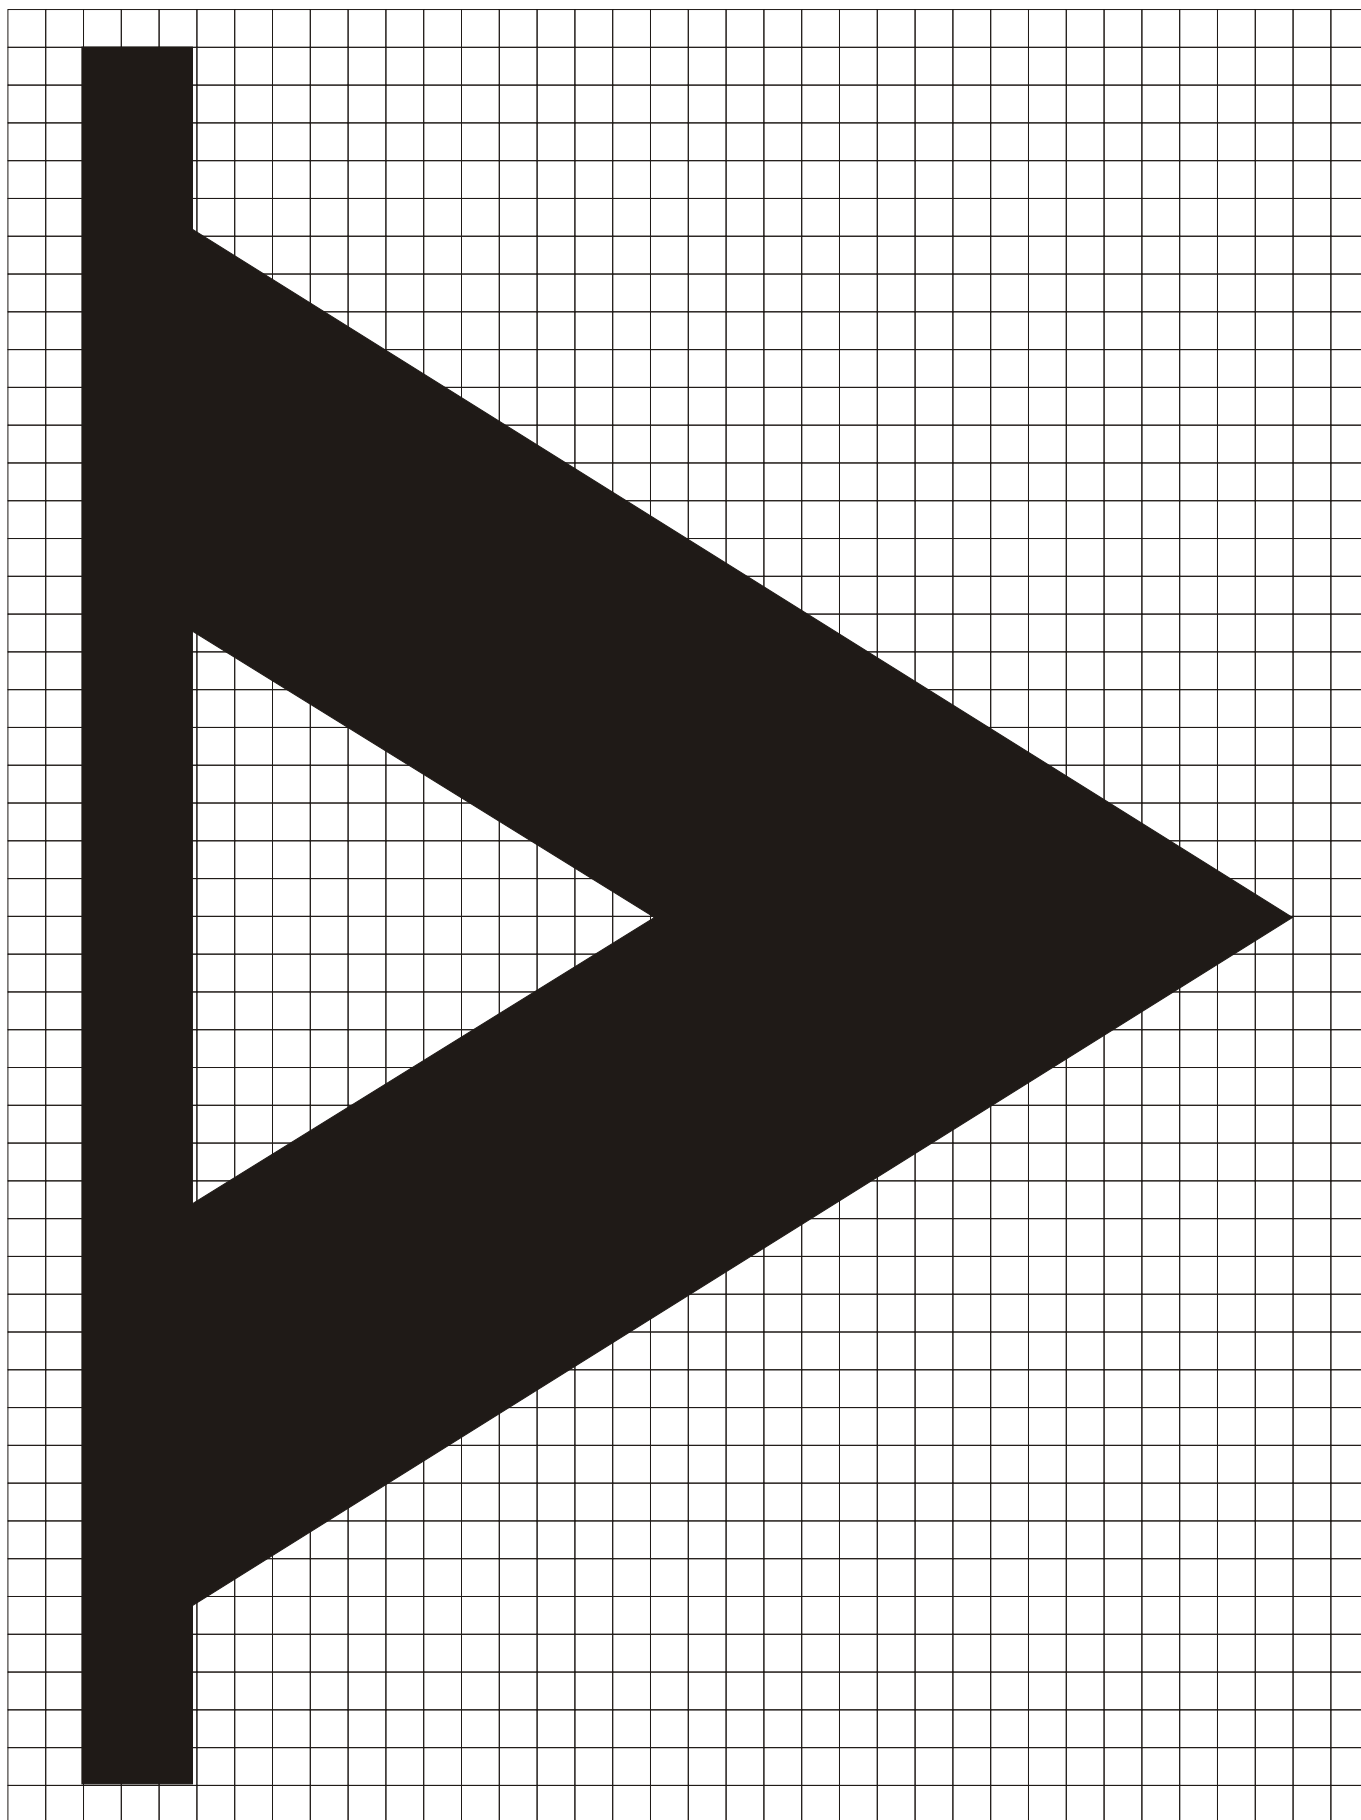


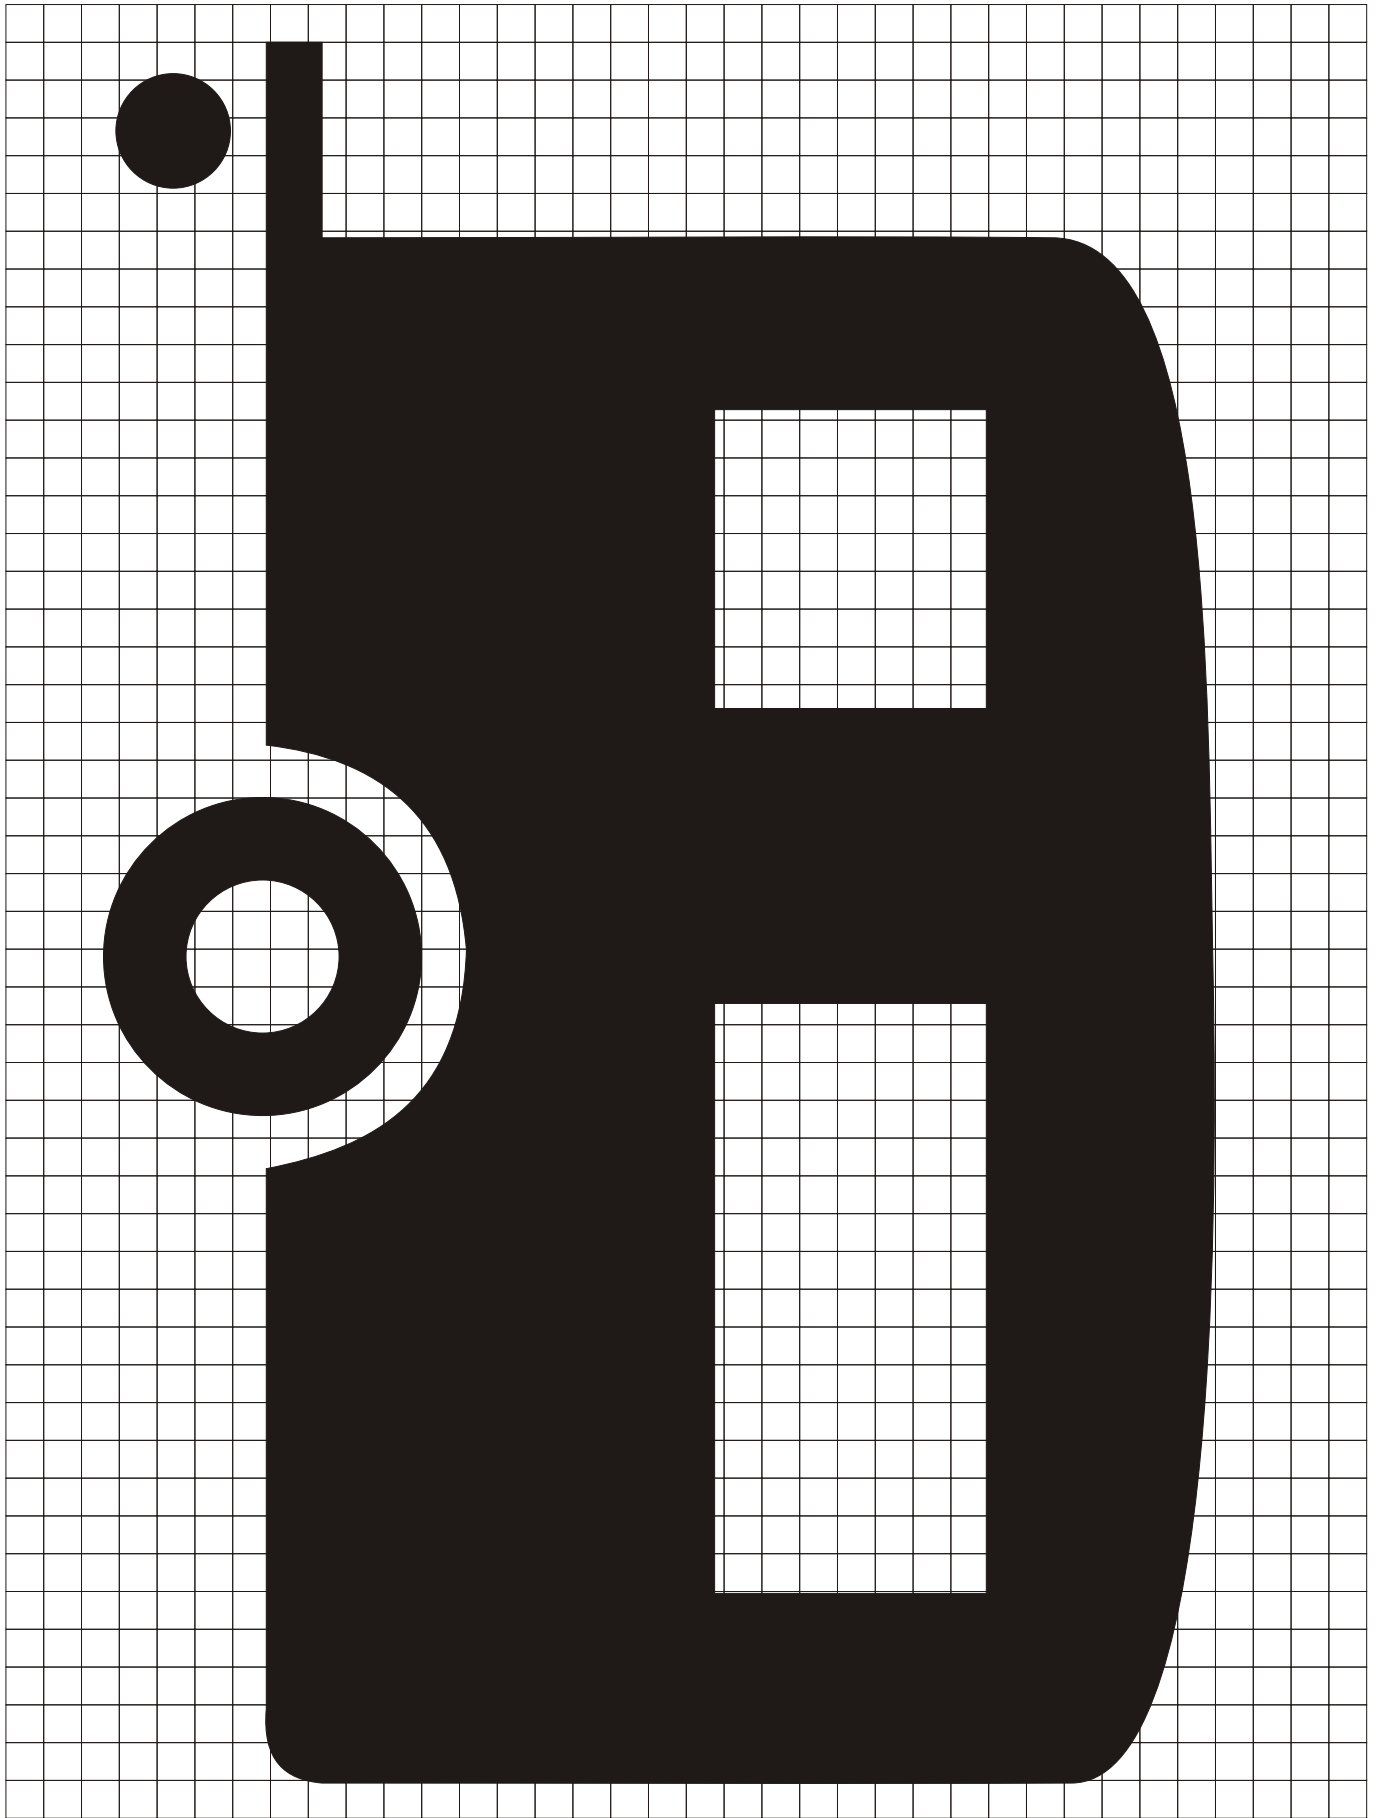


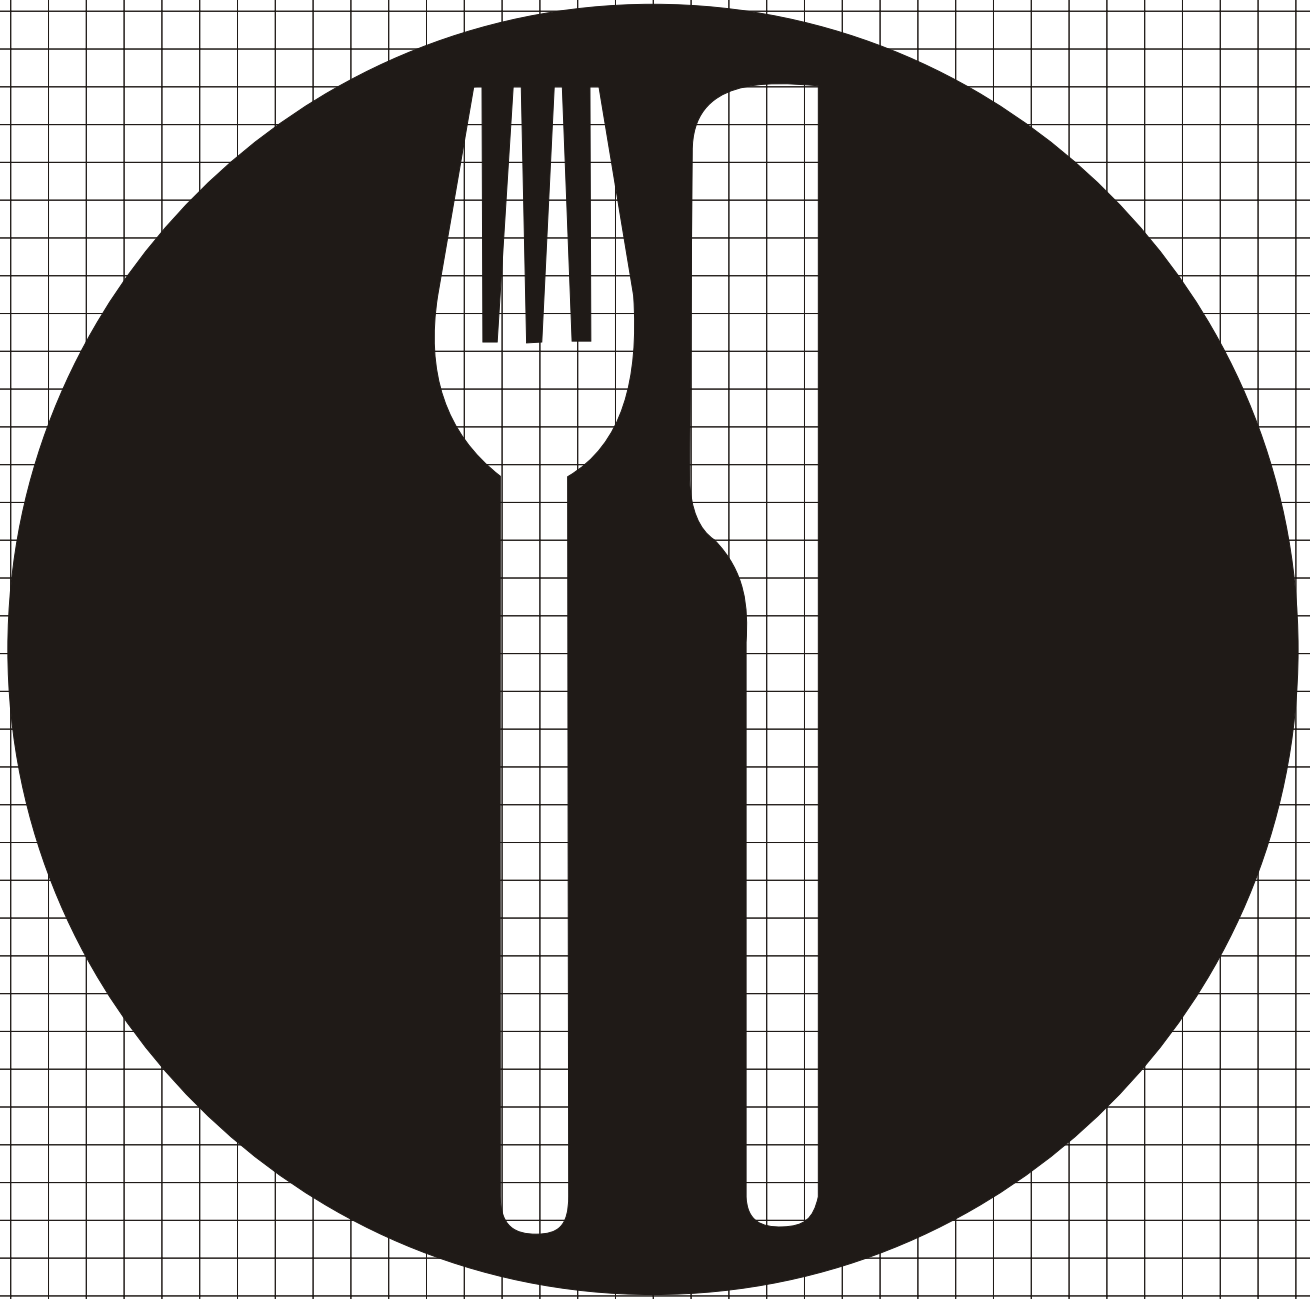


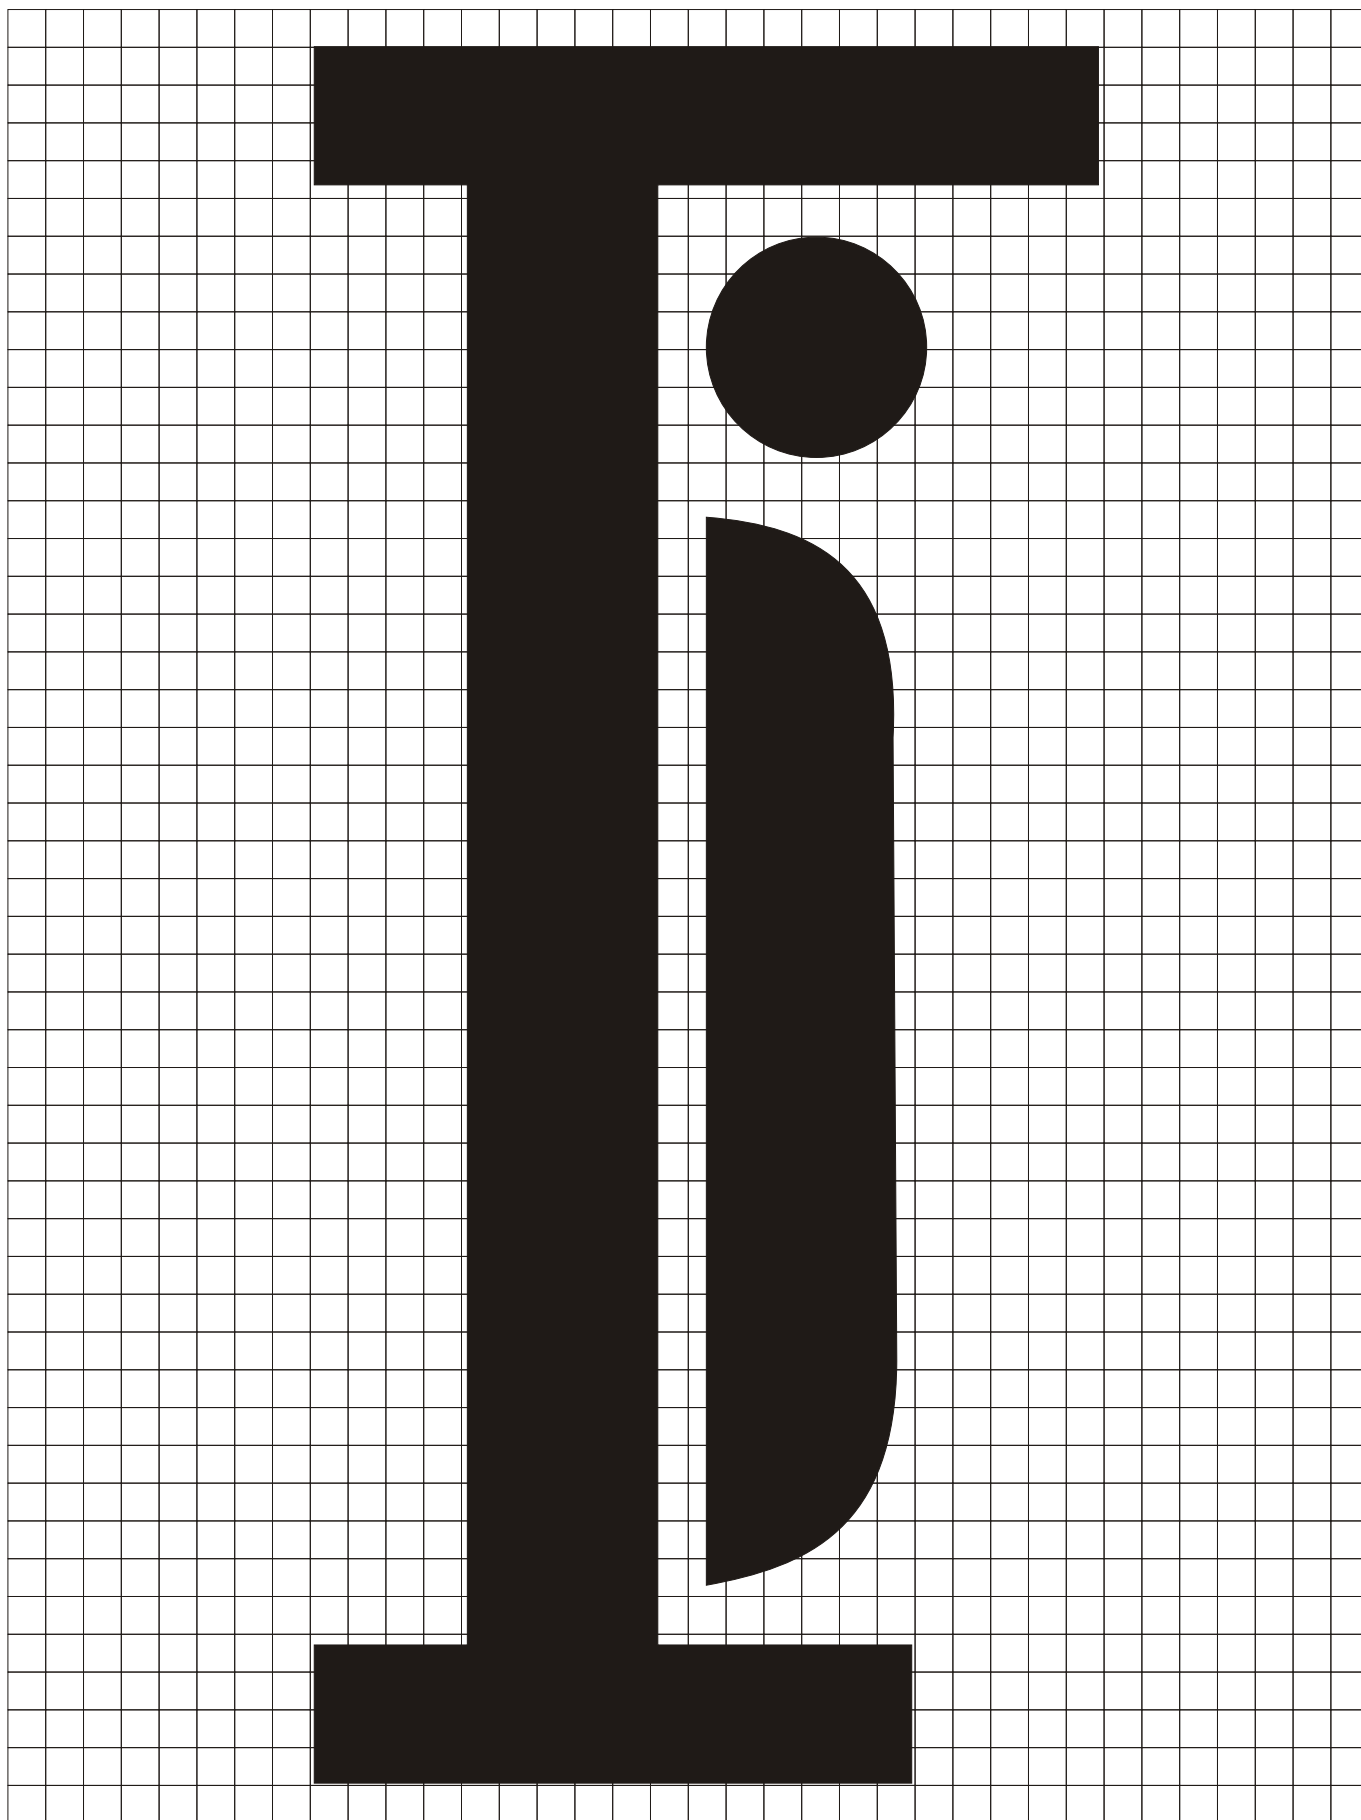





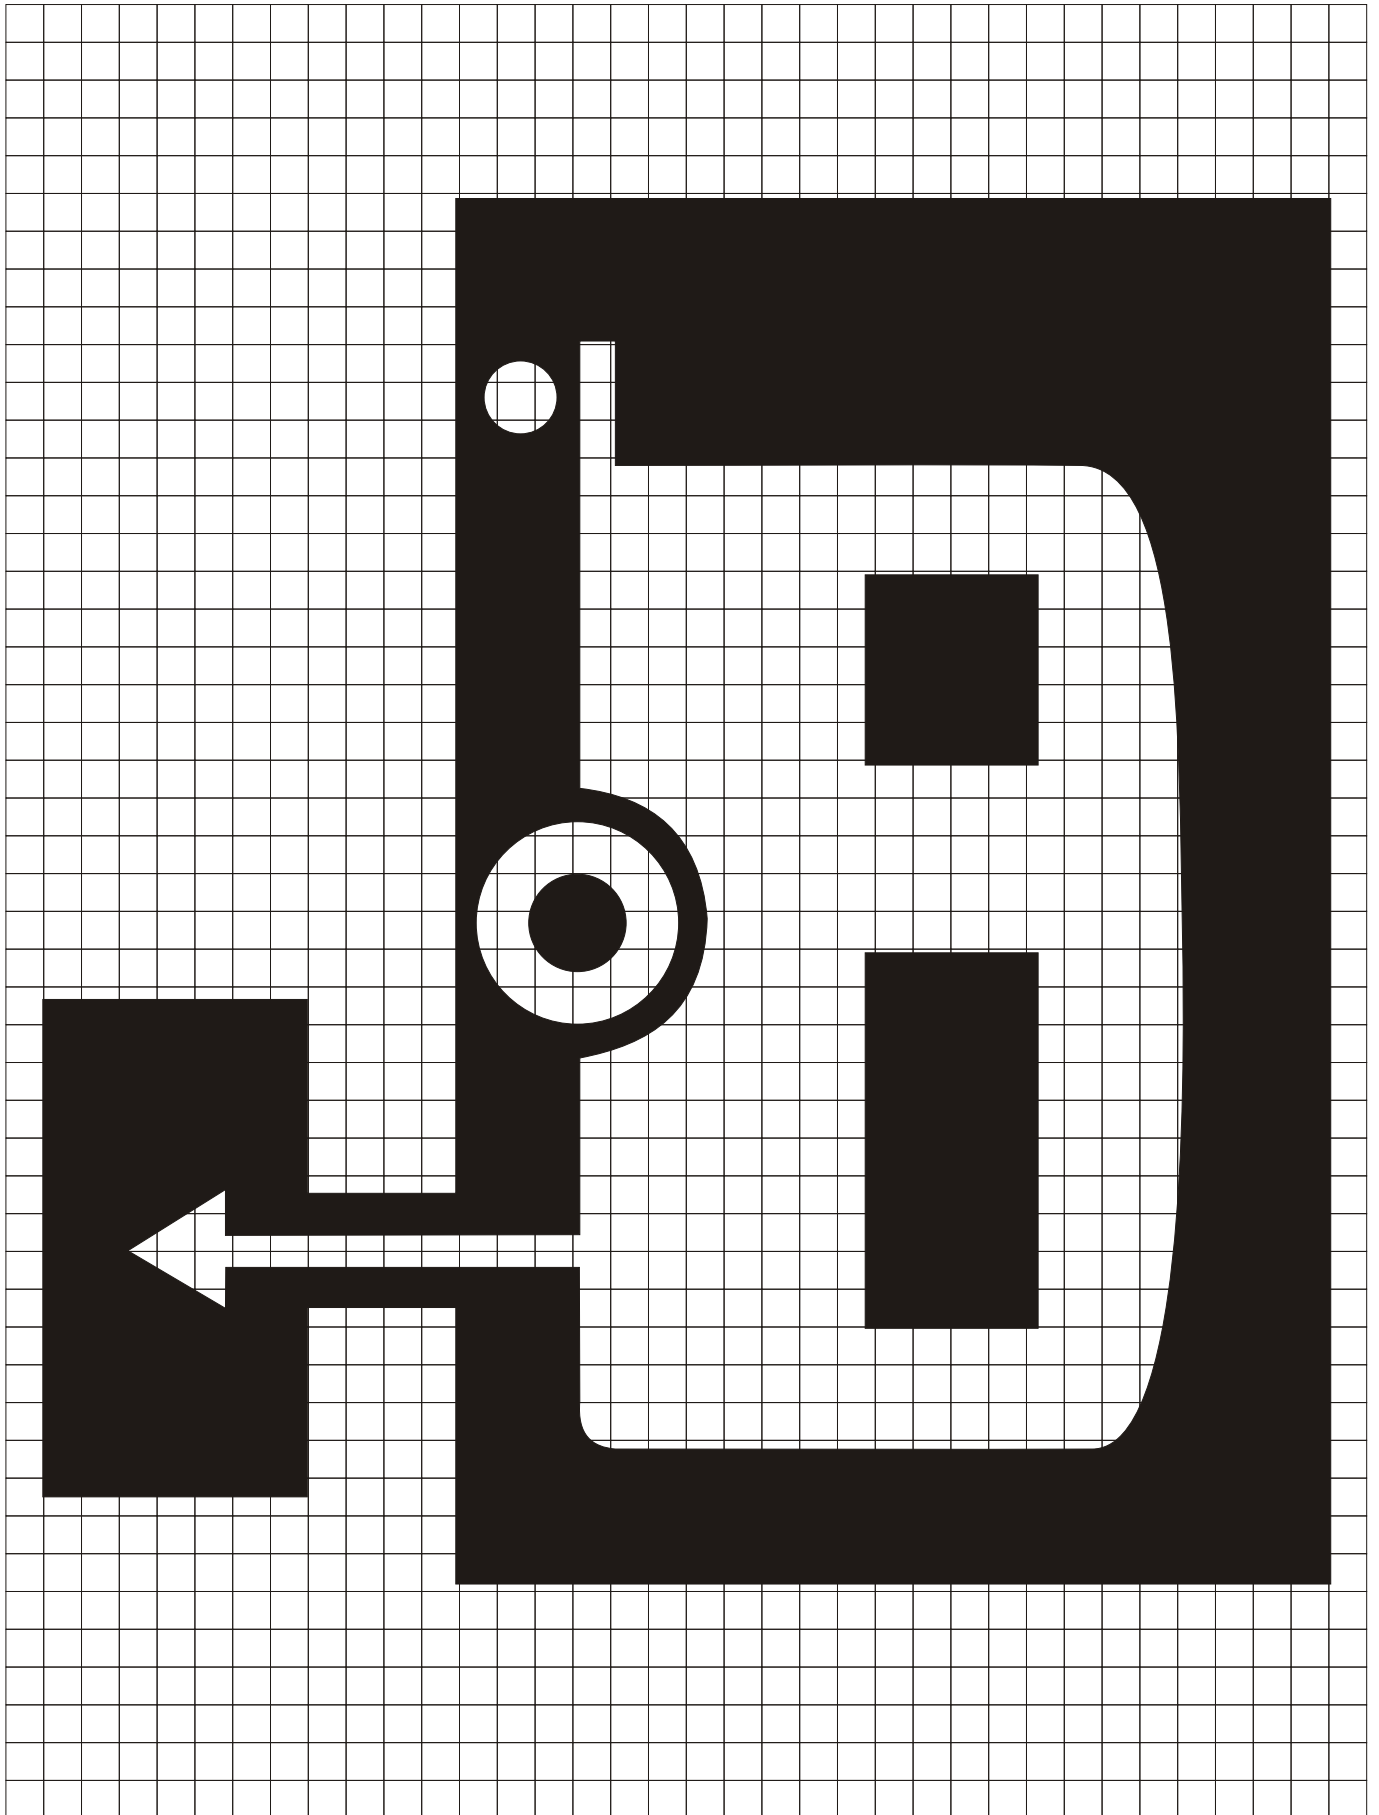


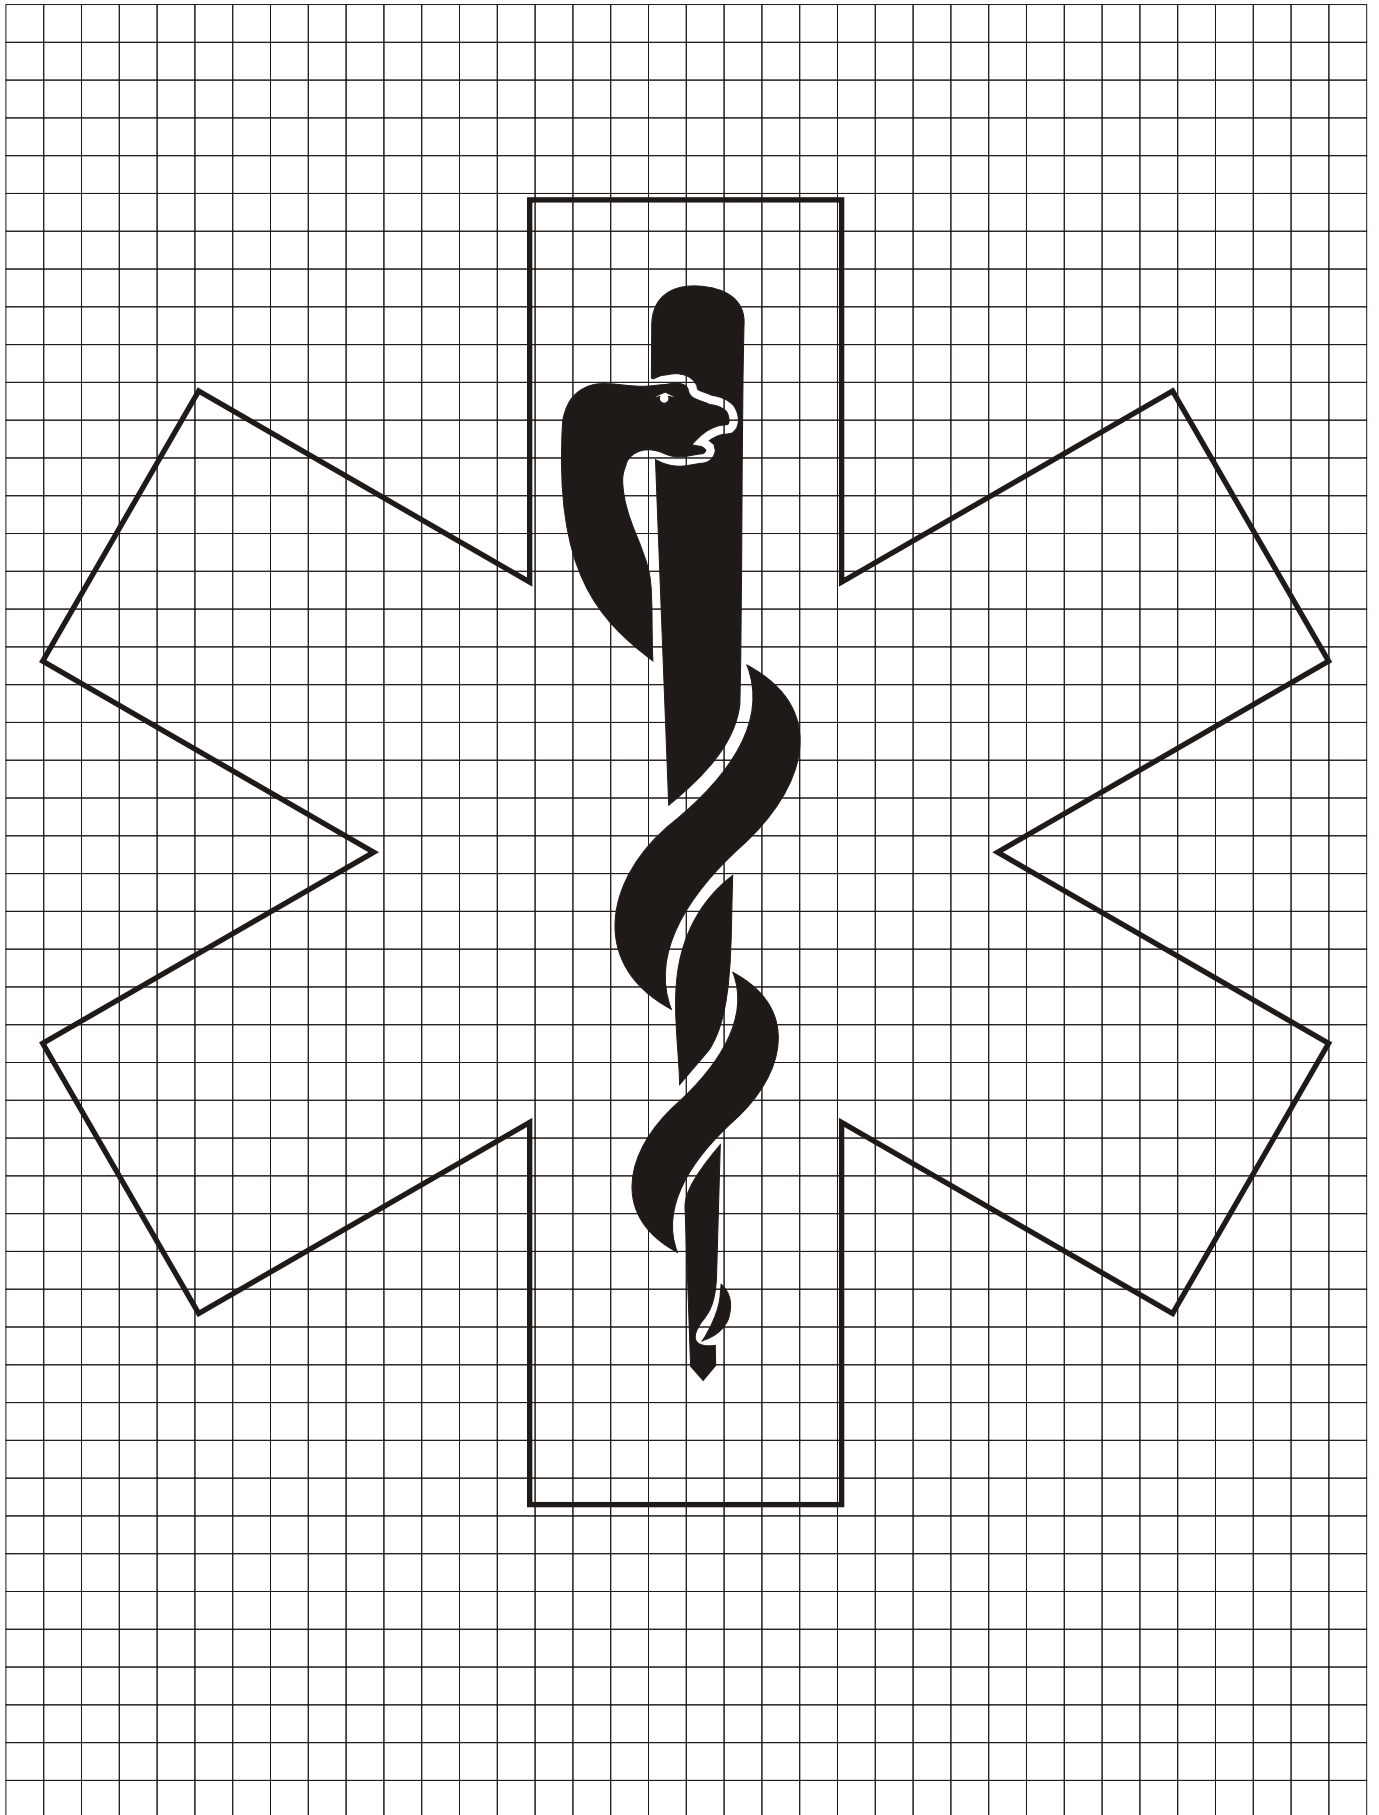


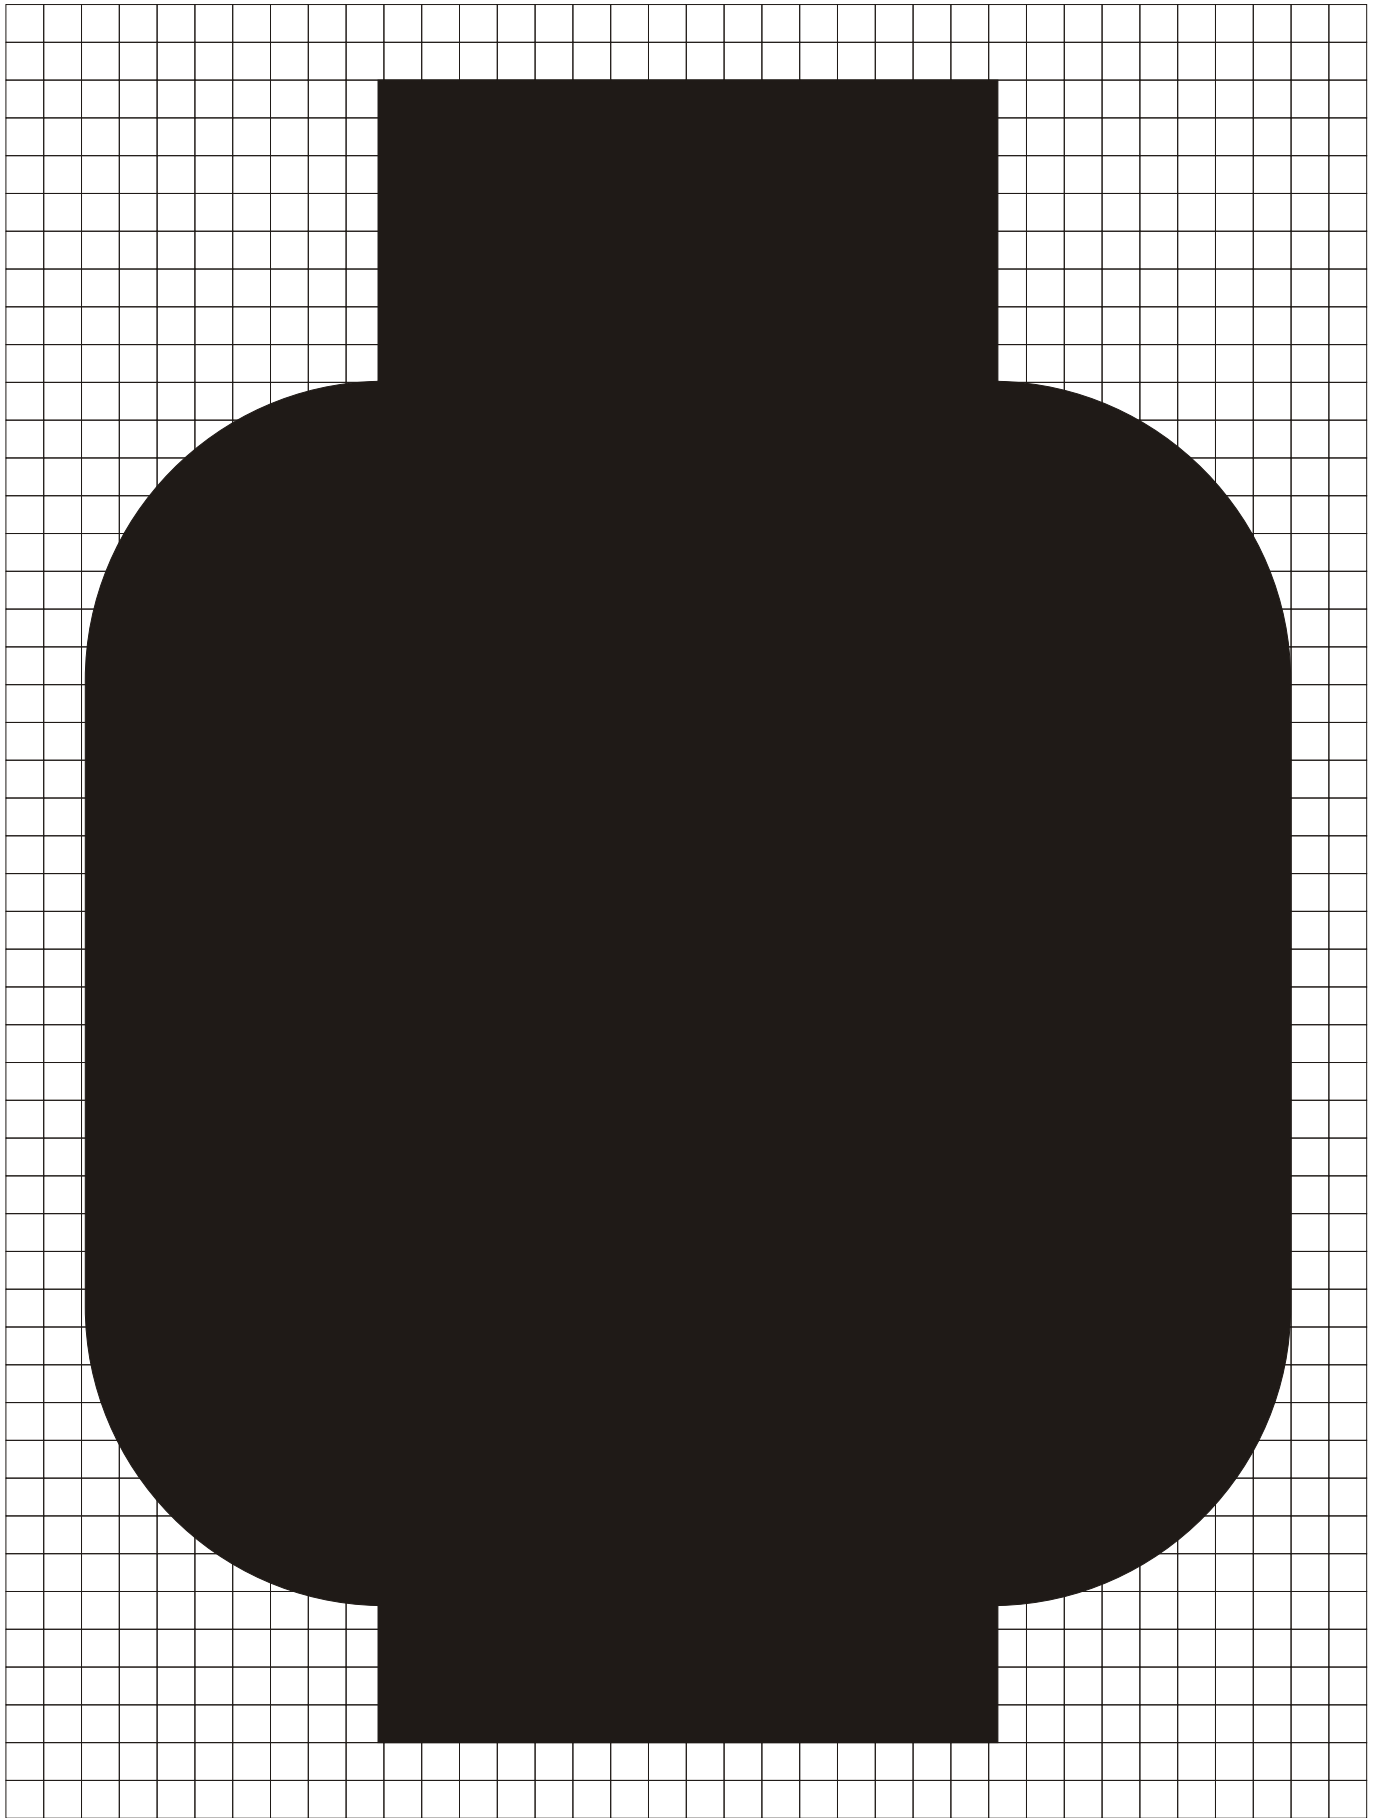


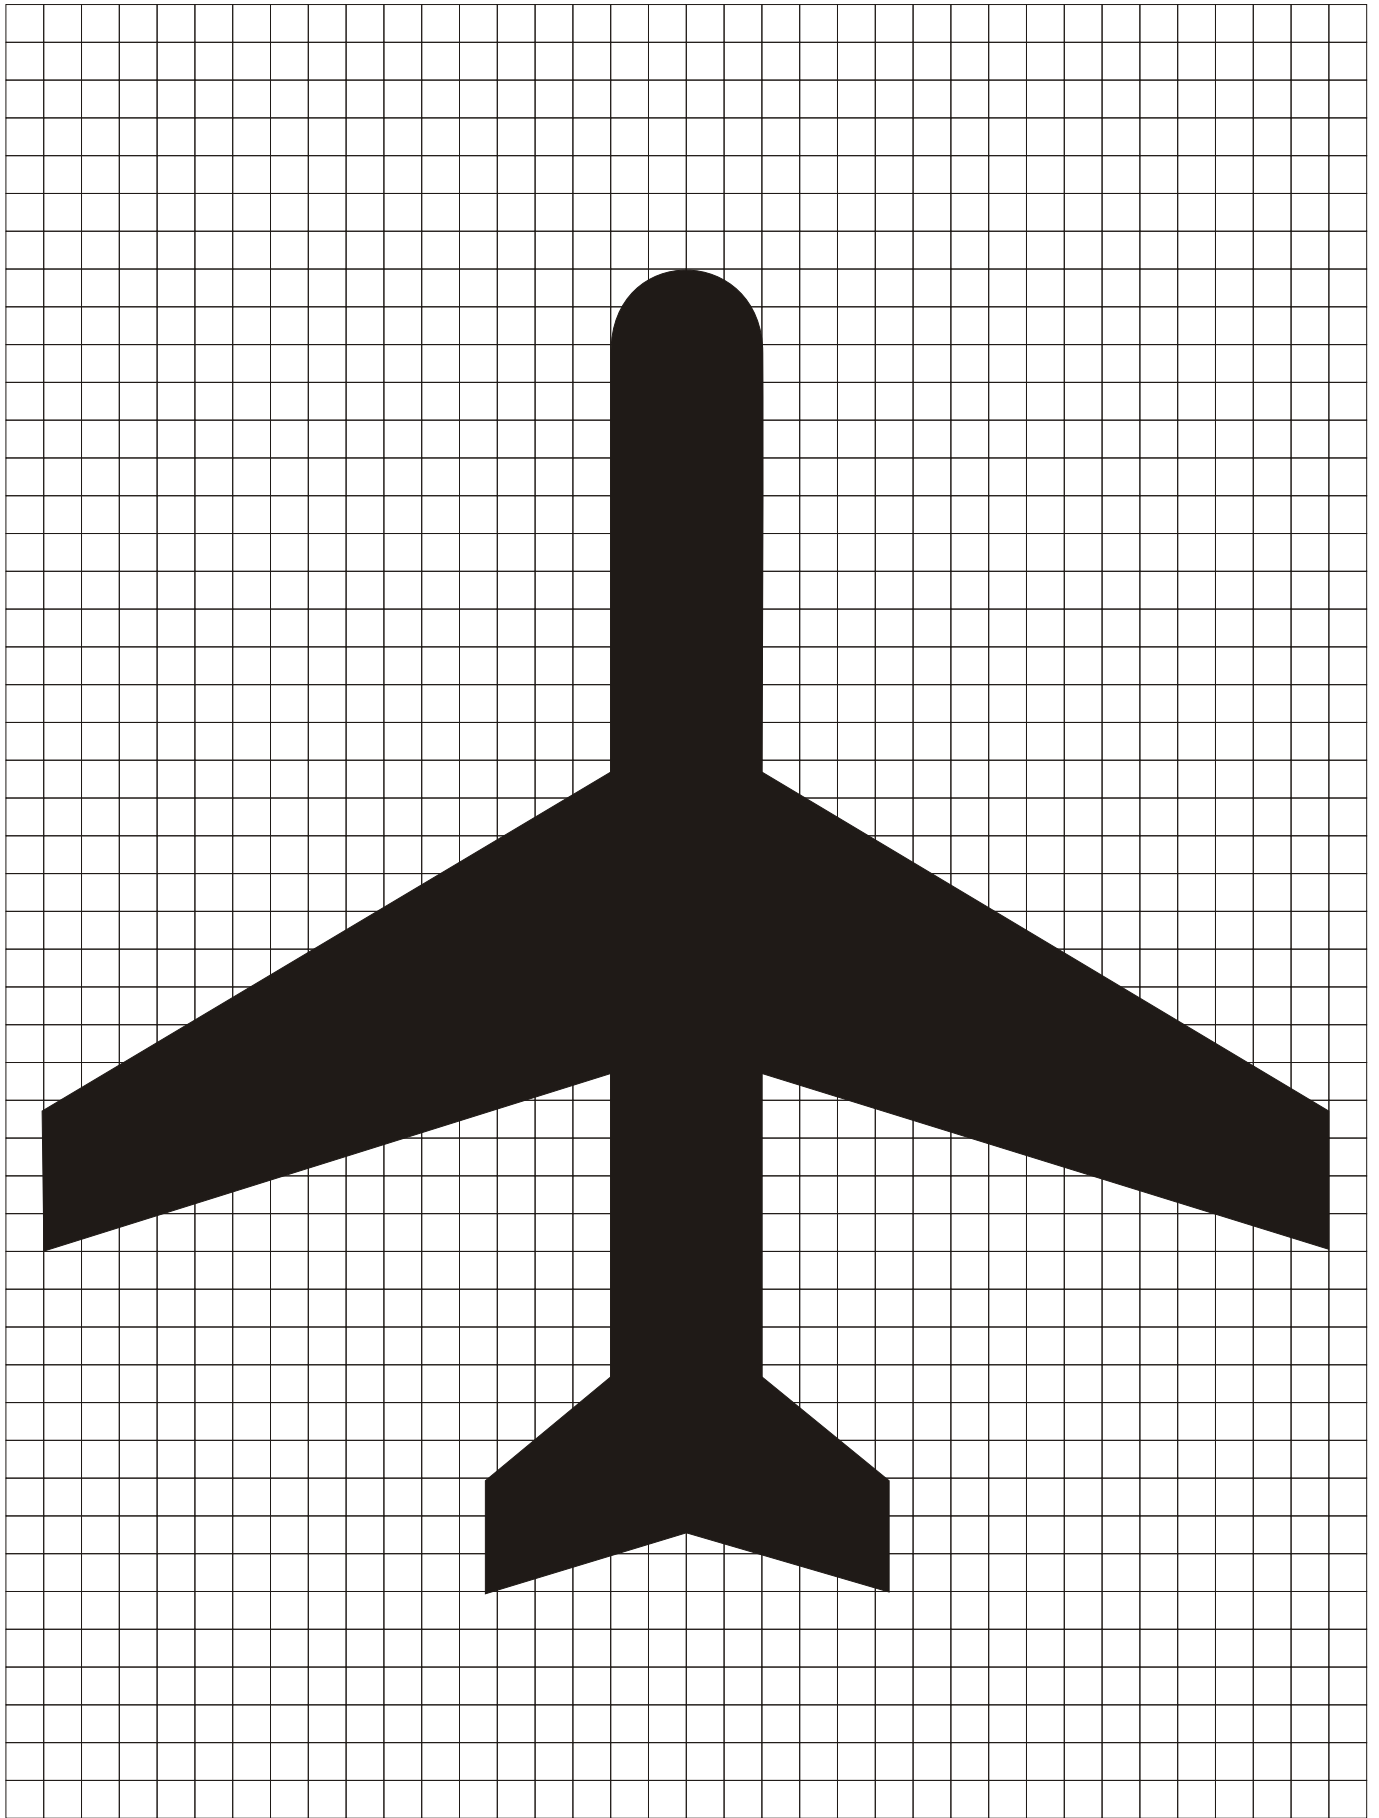


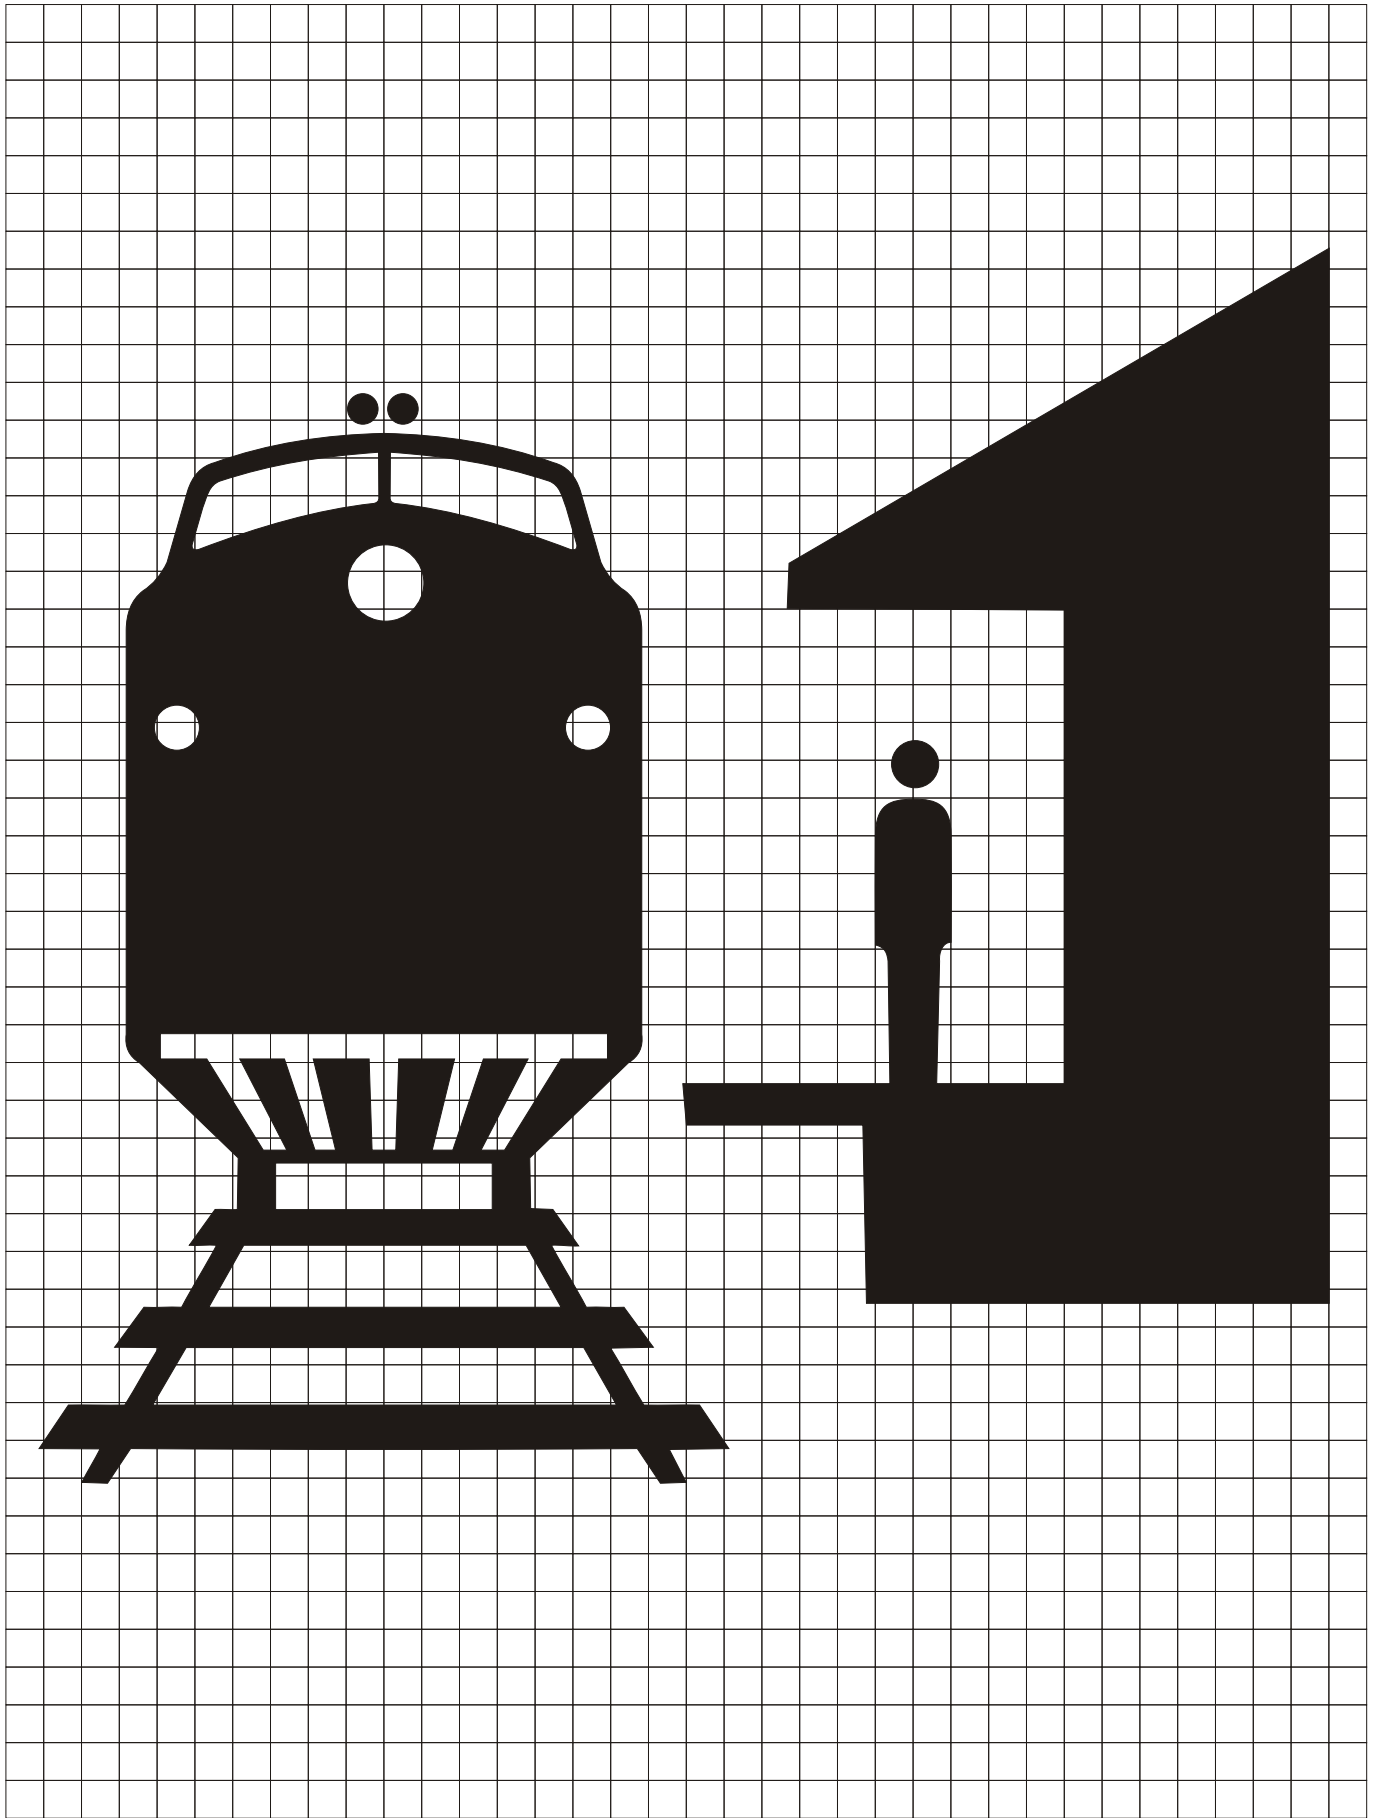


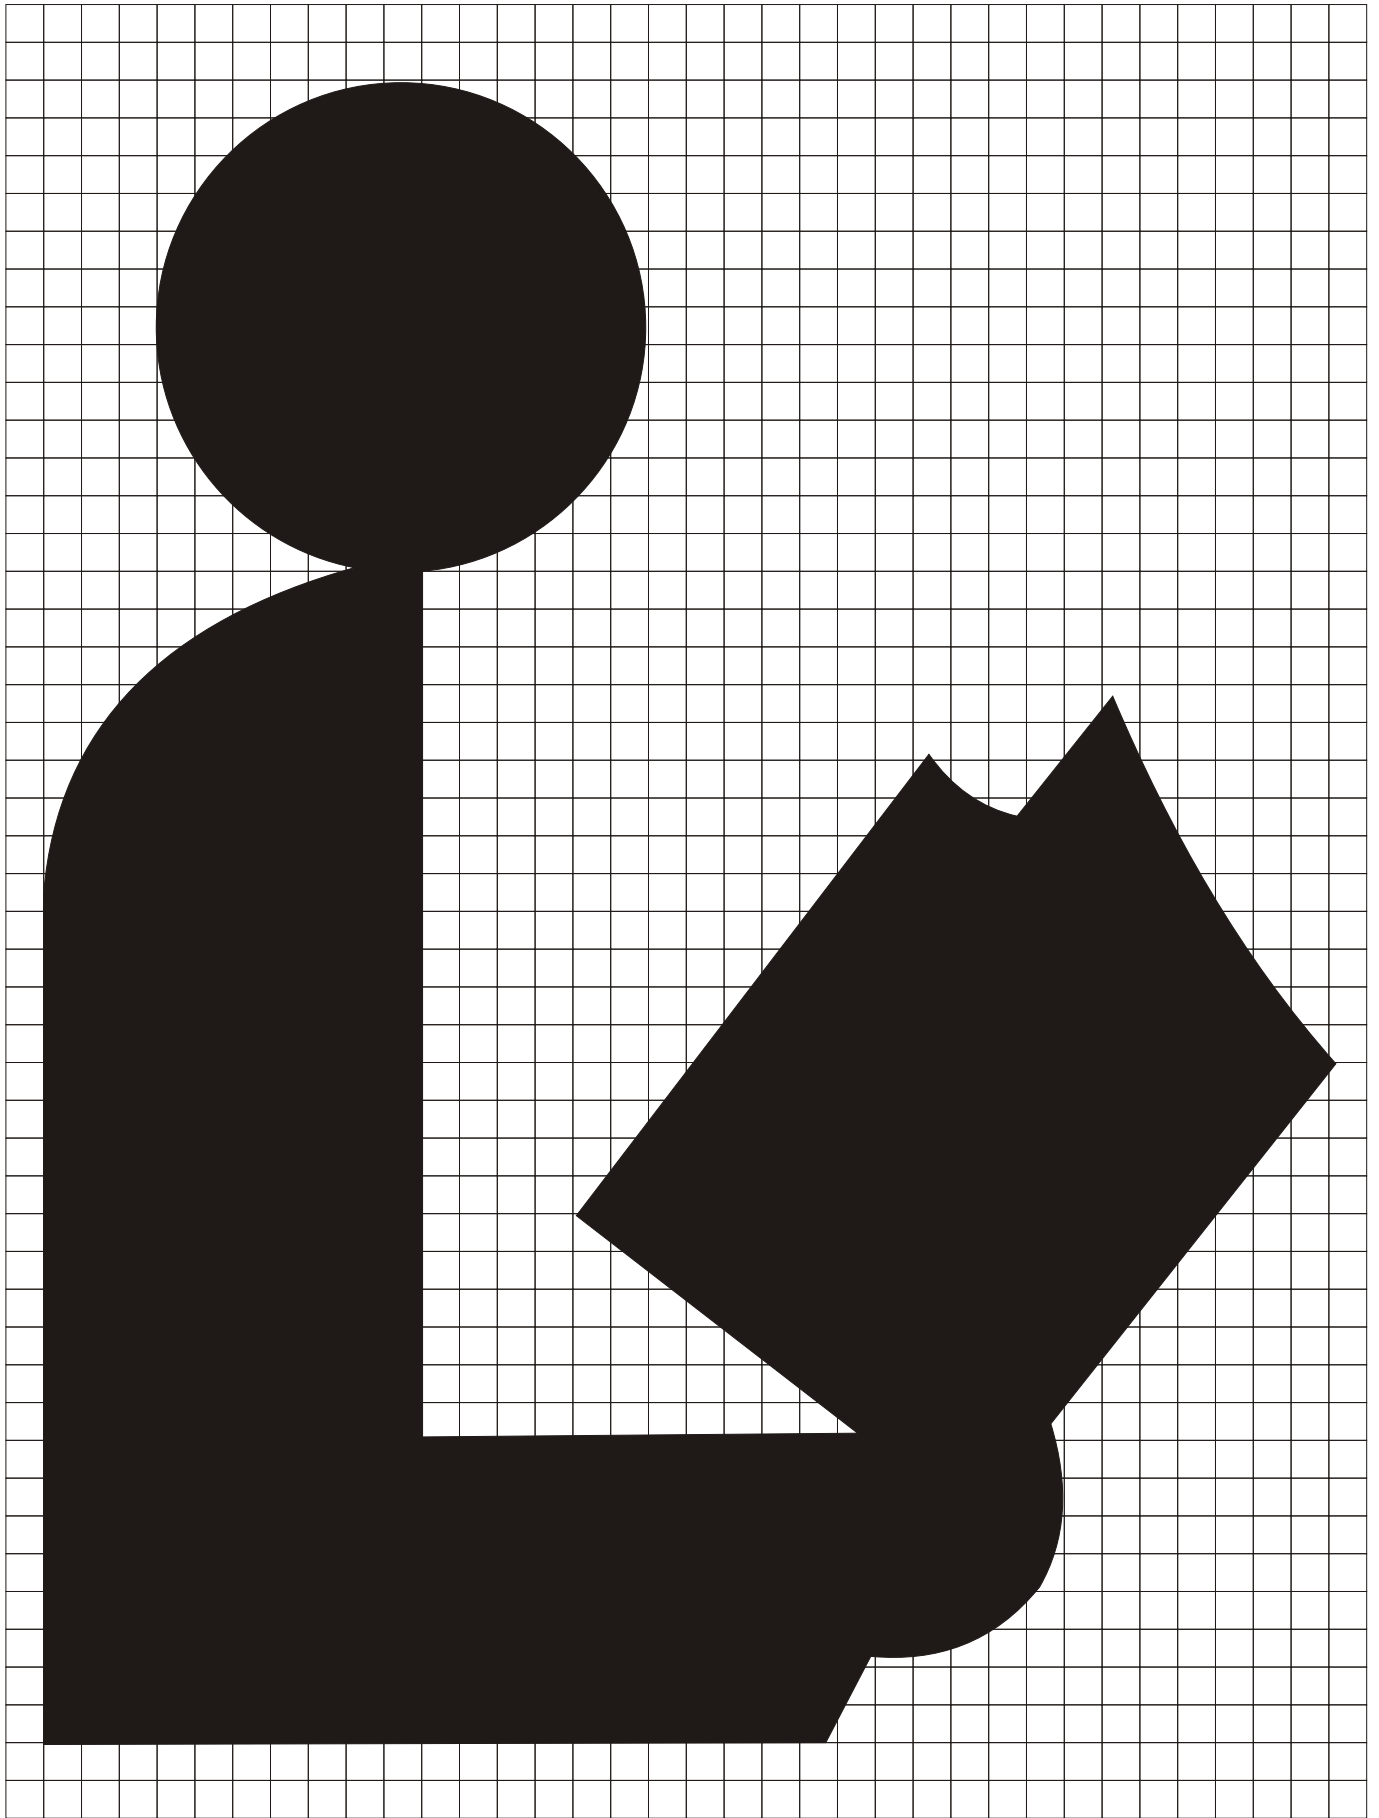


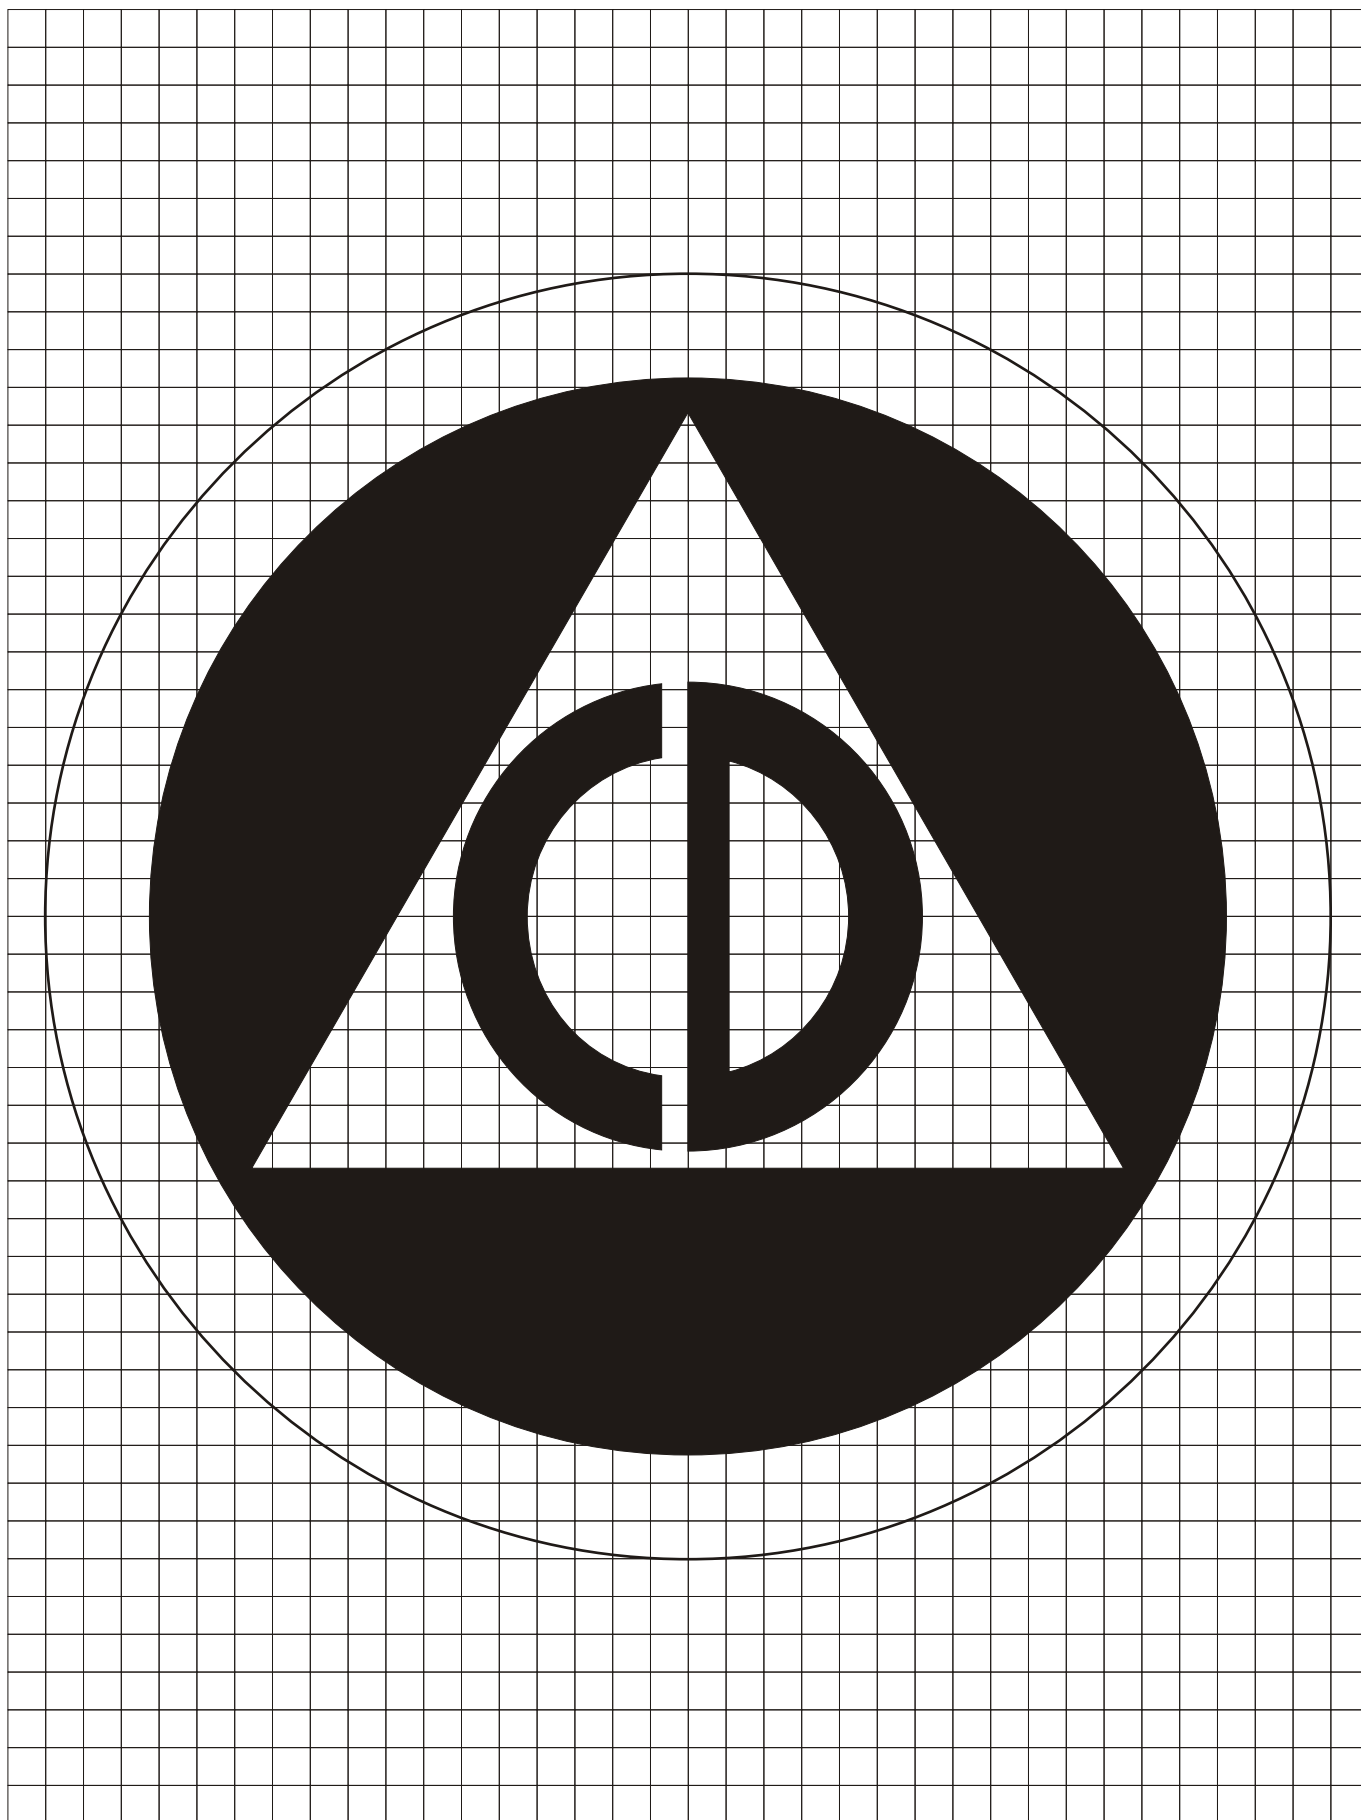


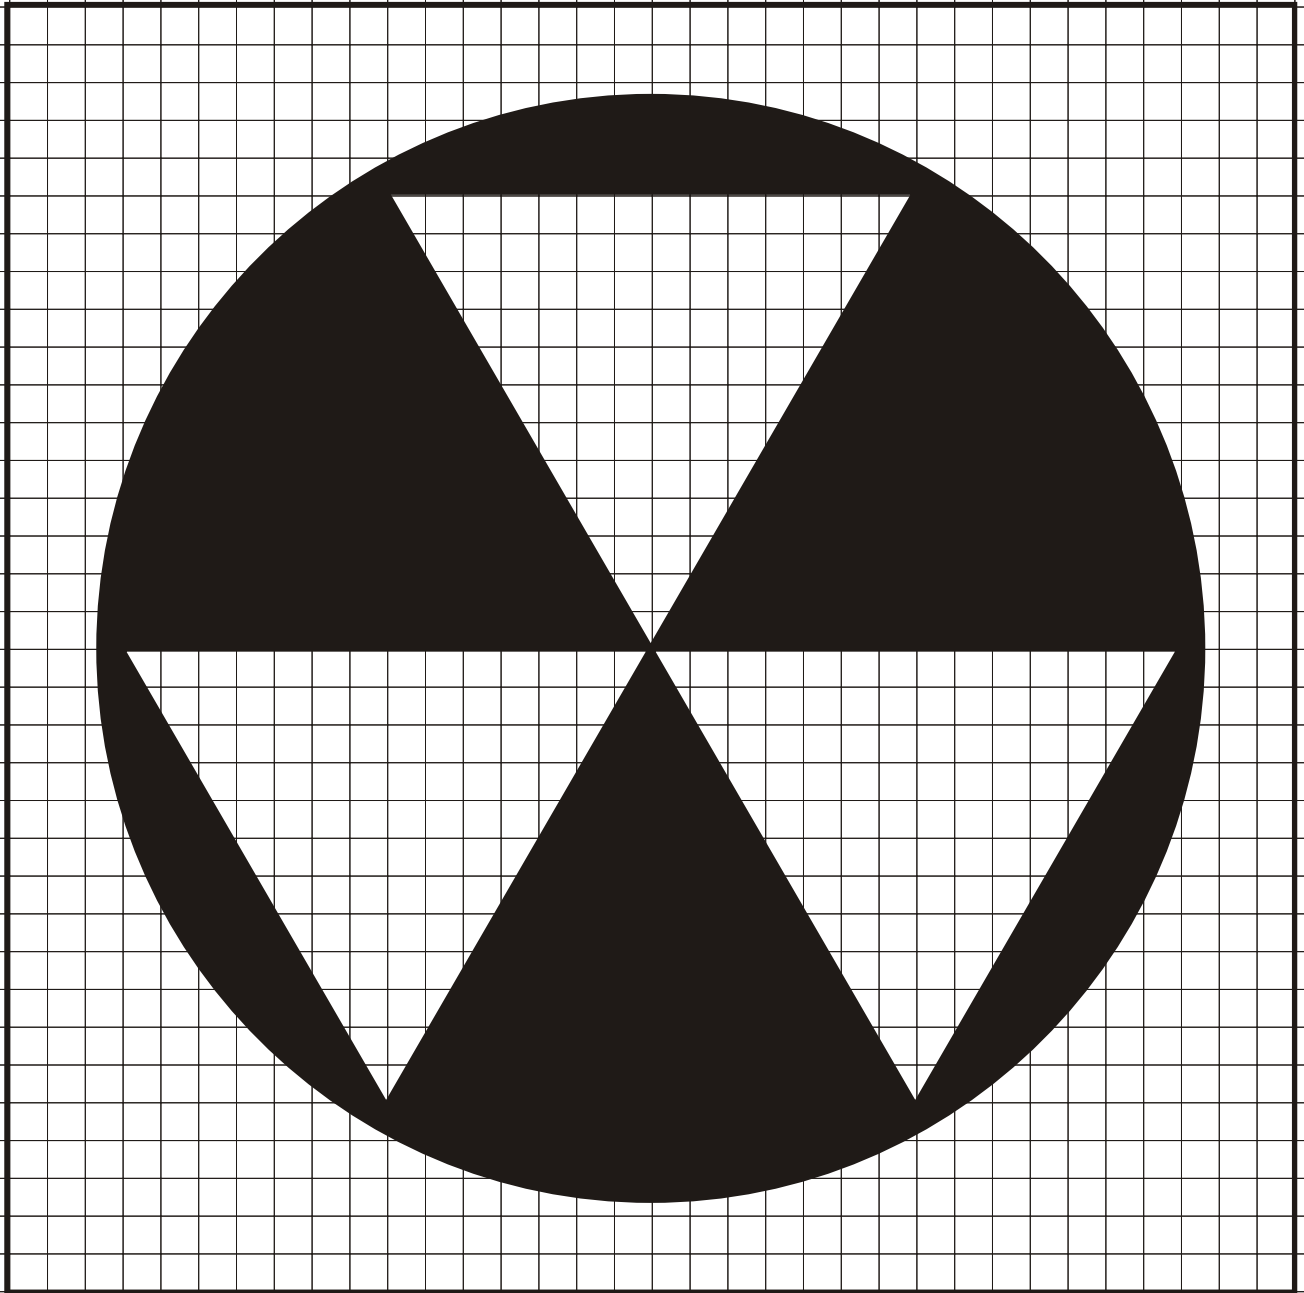

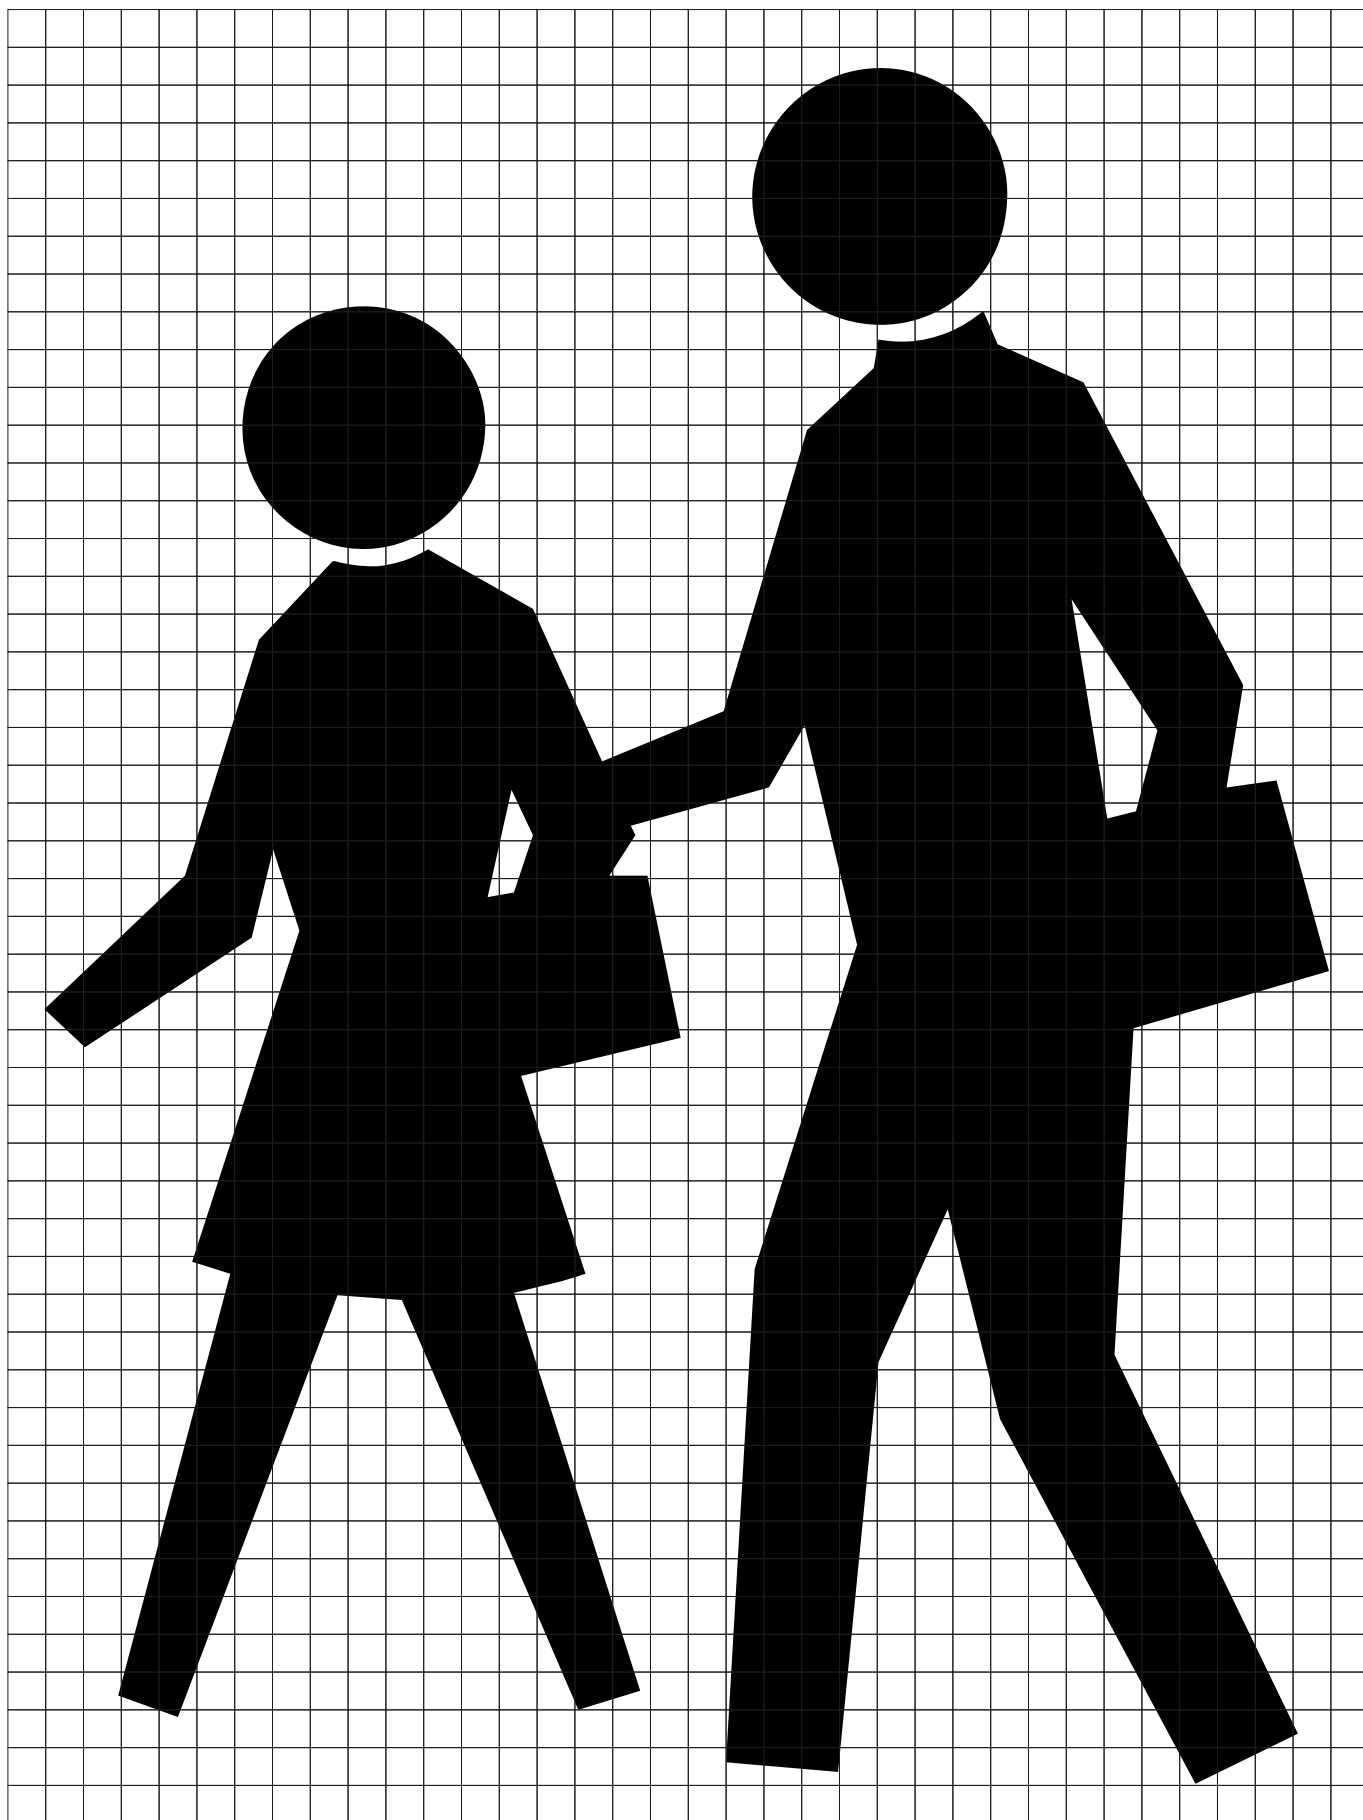


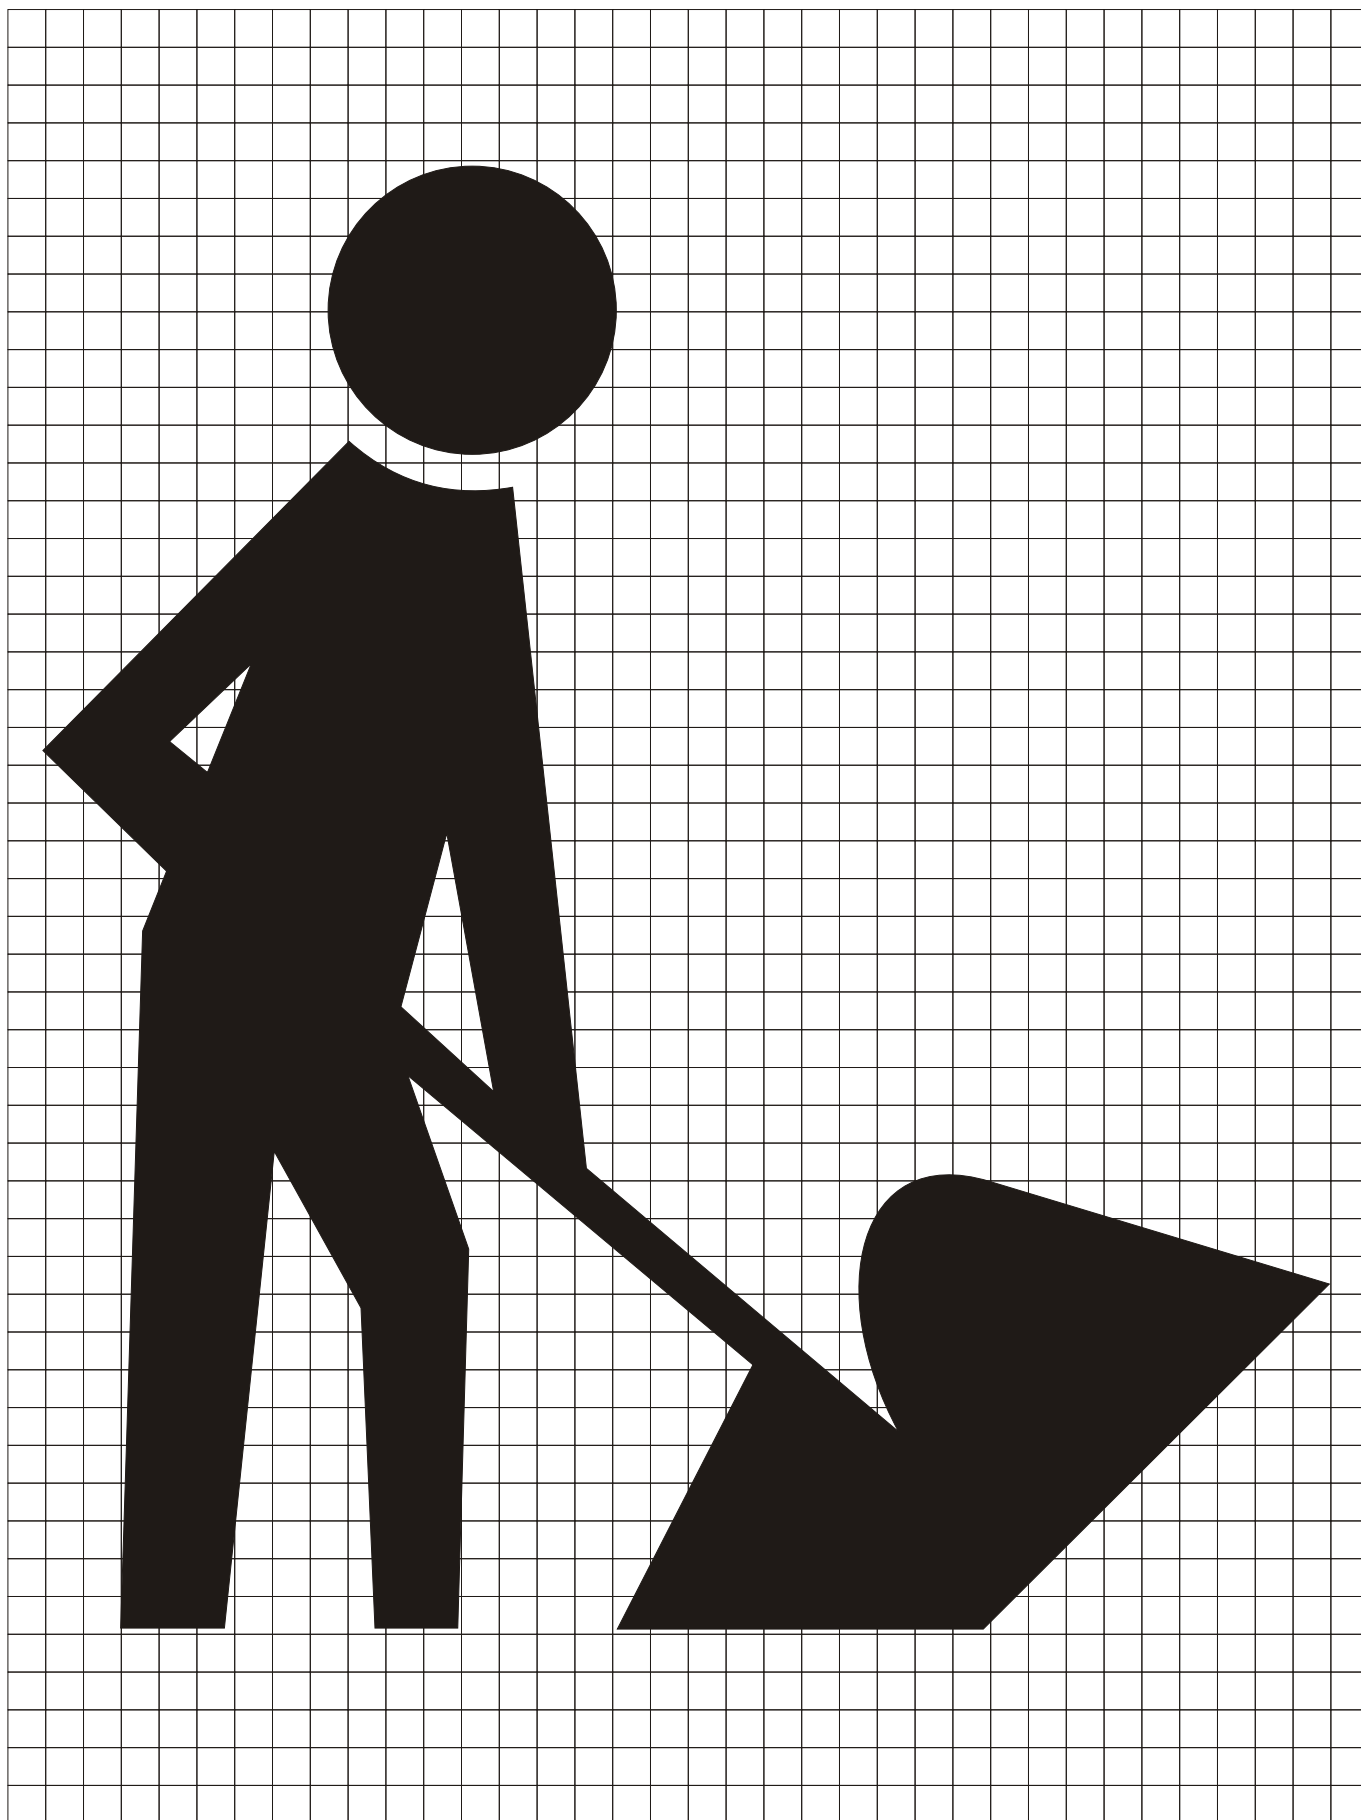

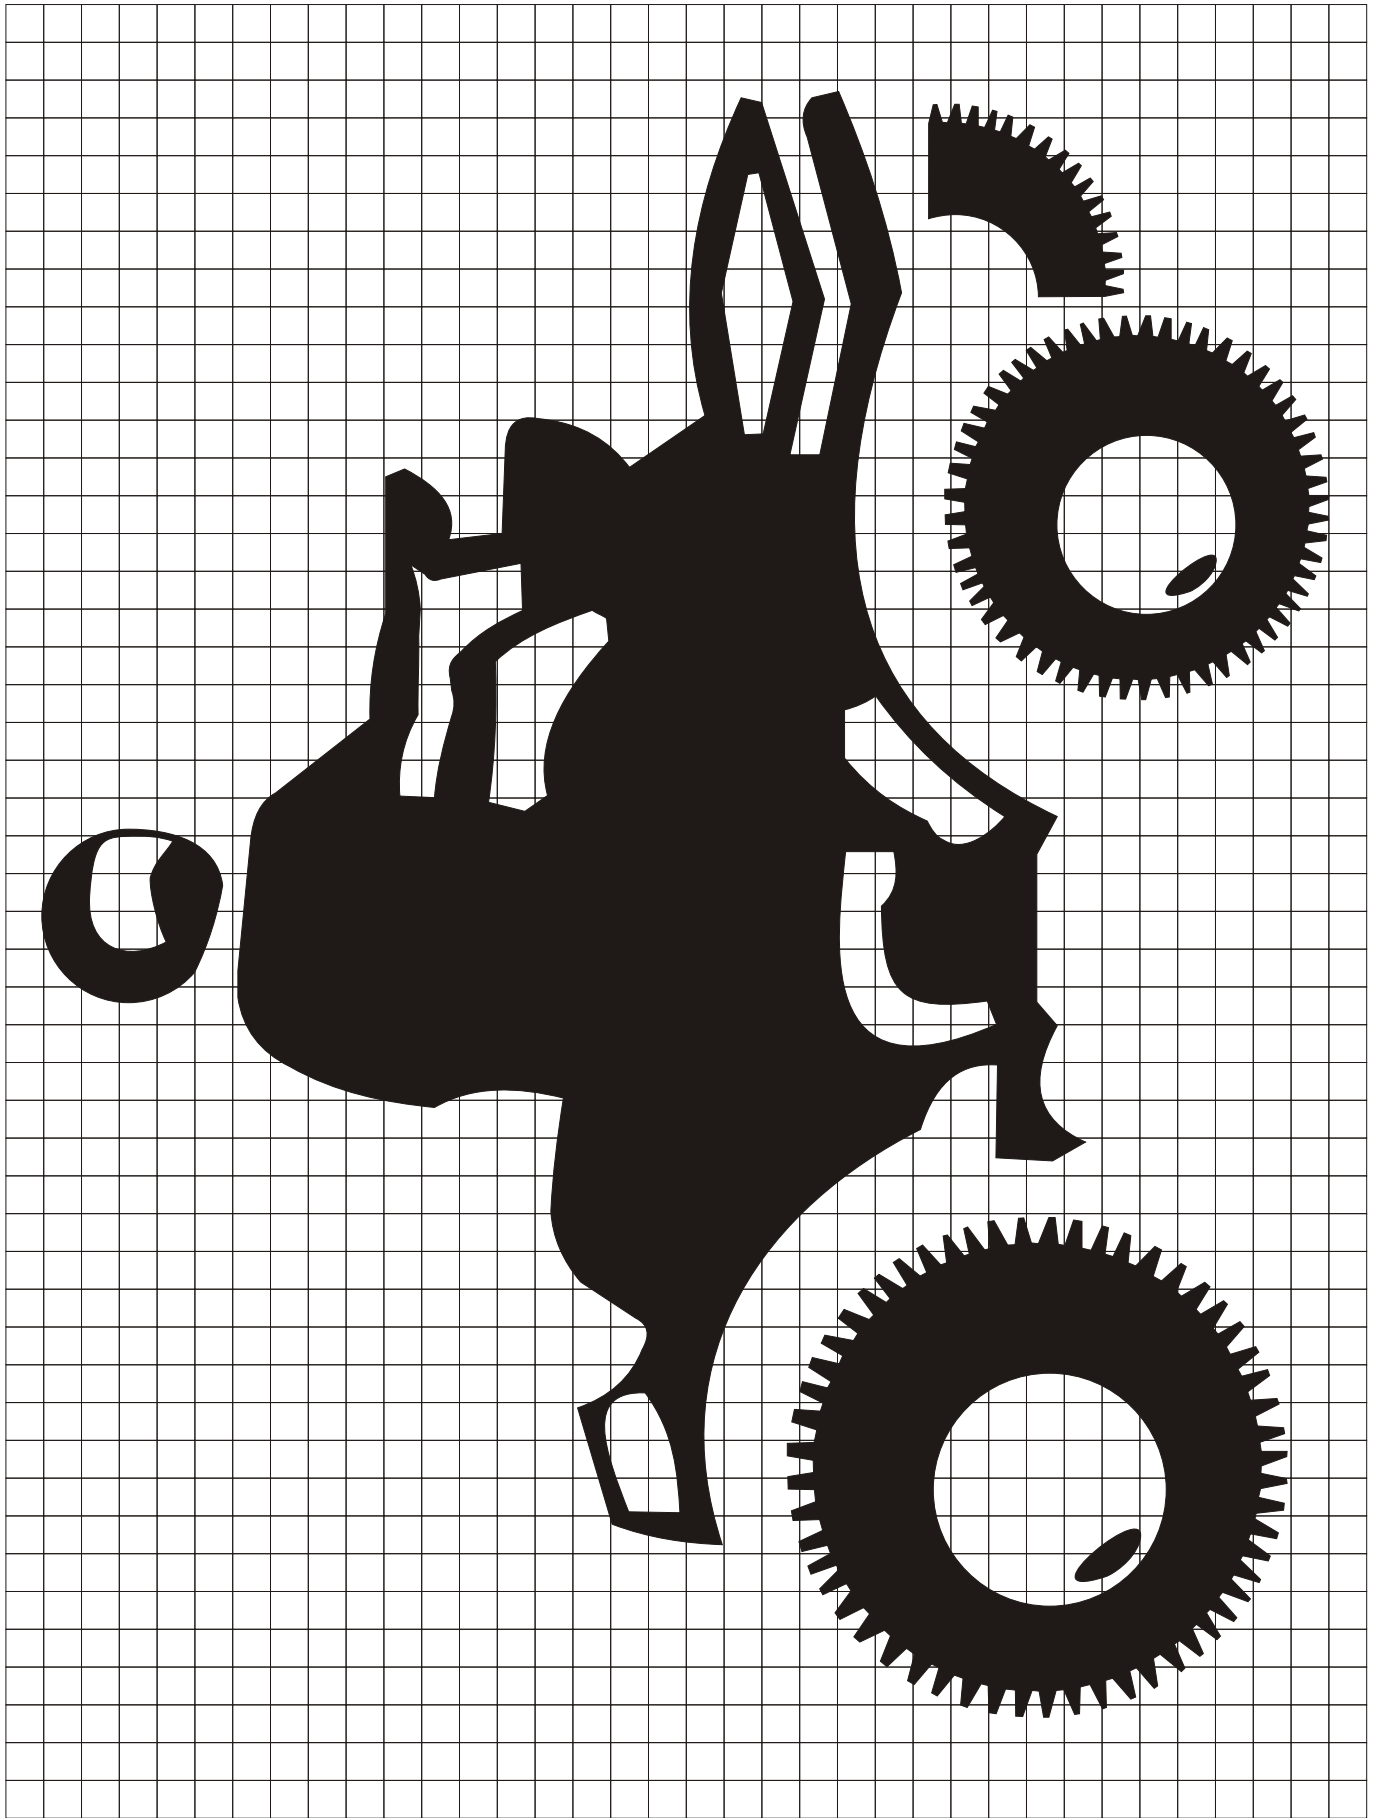

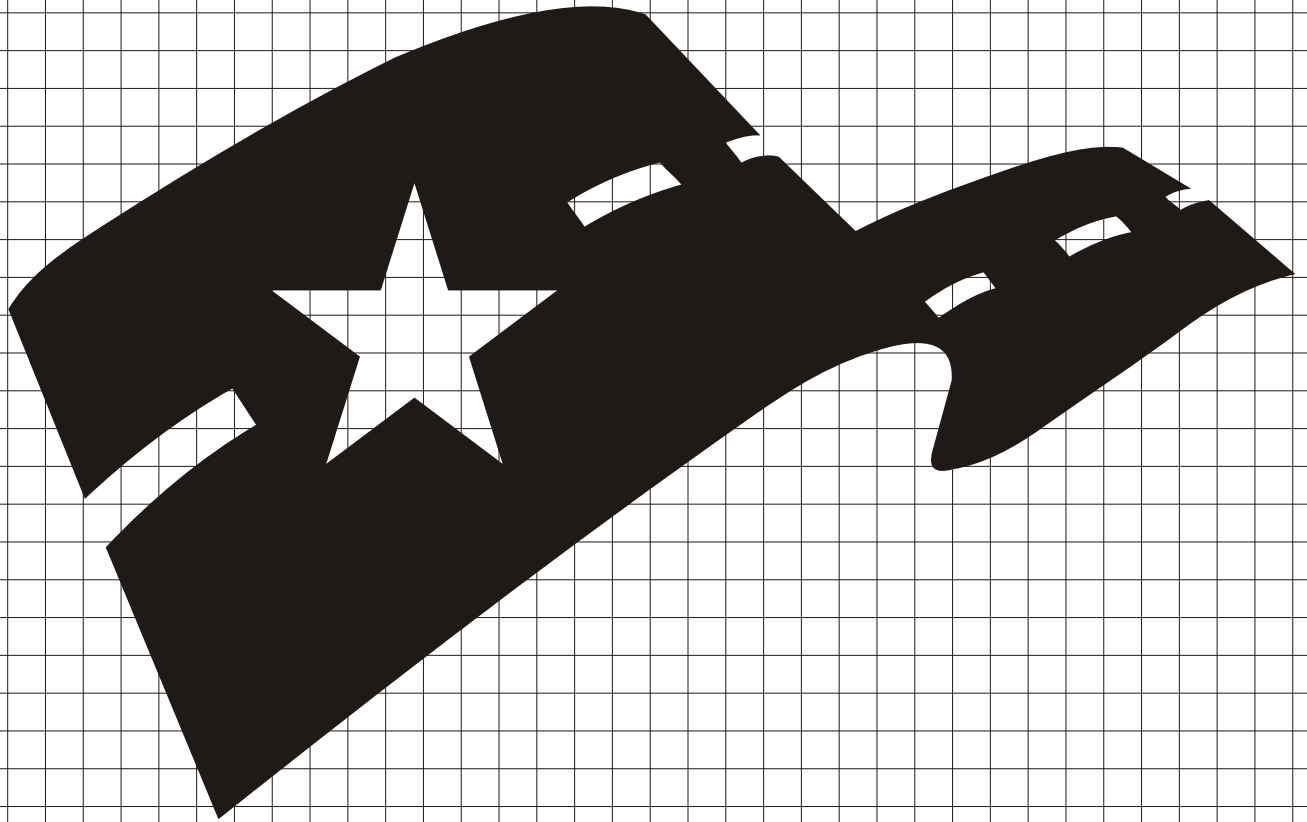

AMERICA'S BYWAYS

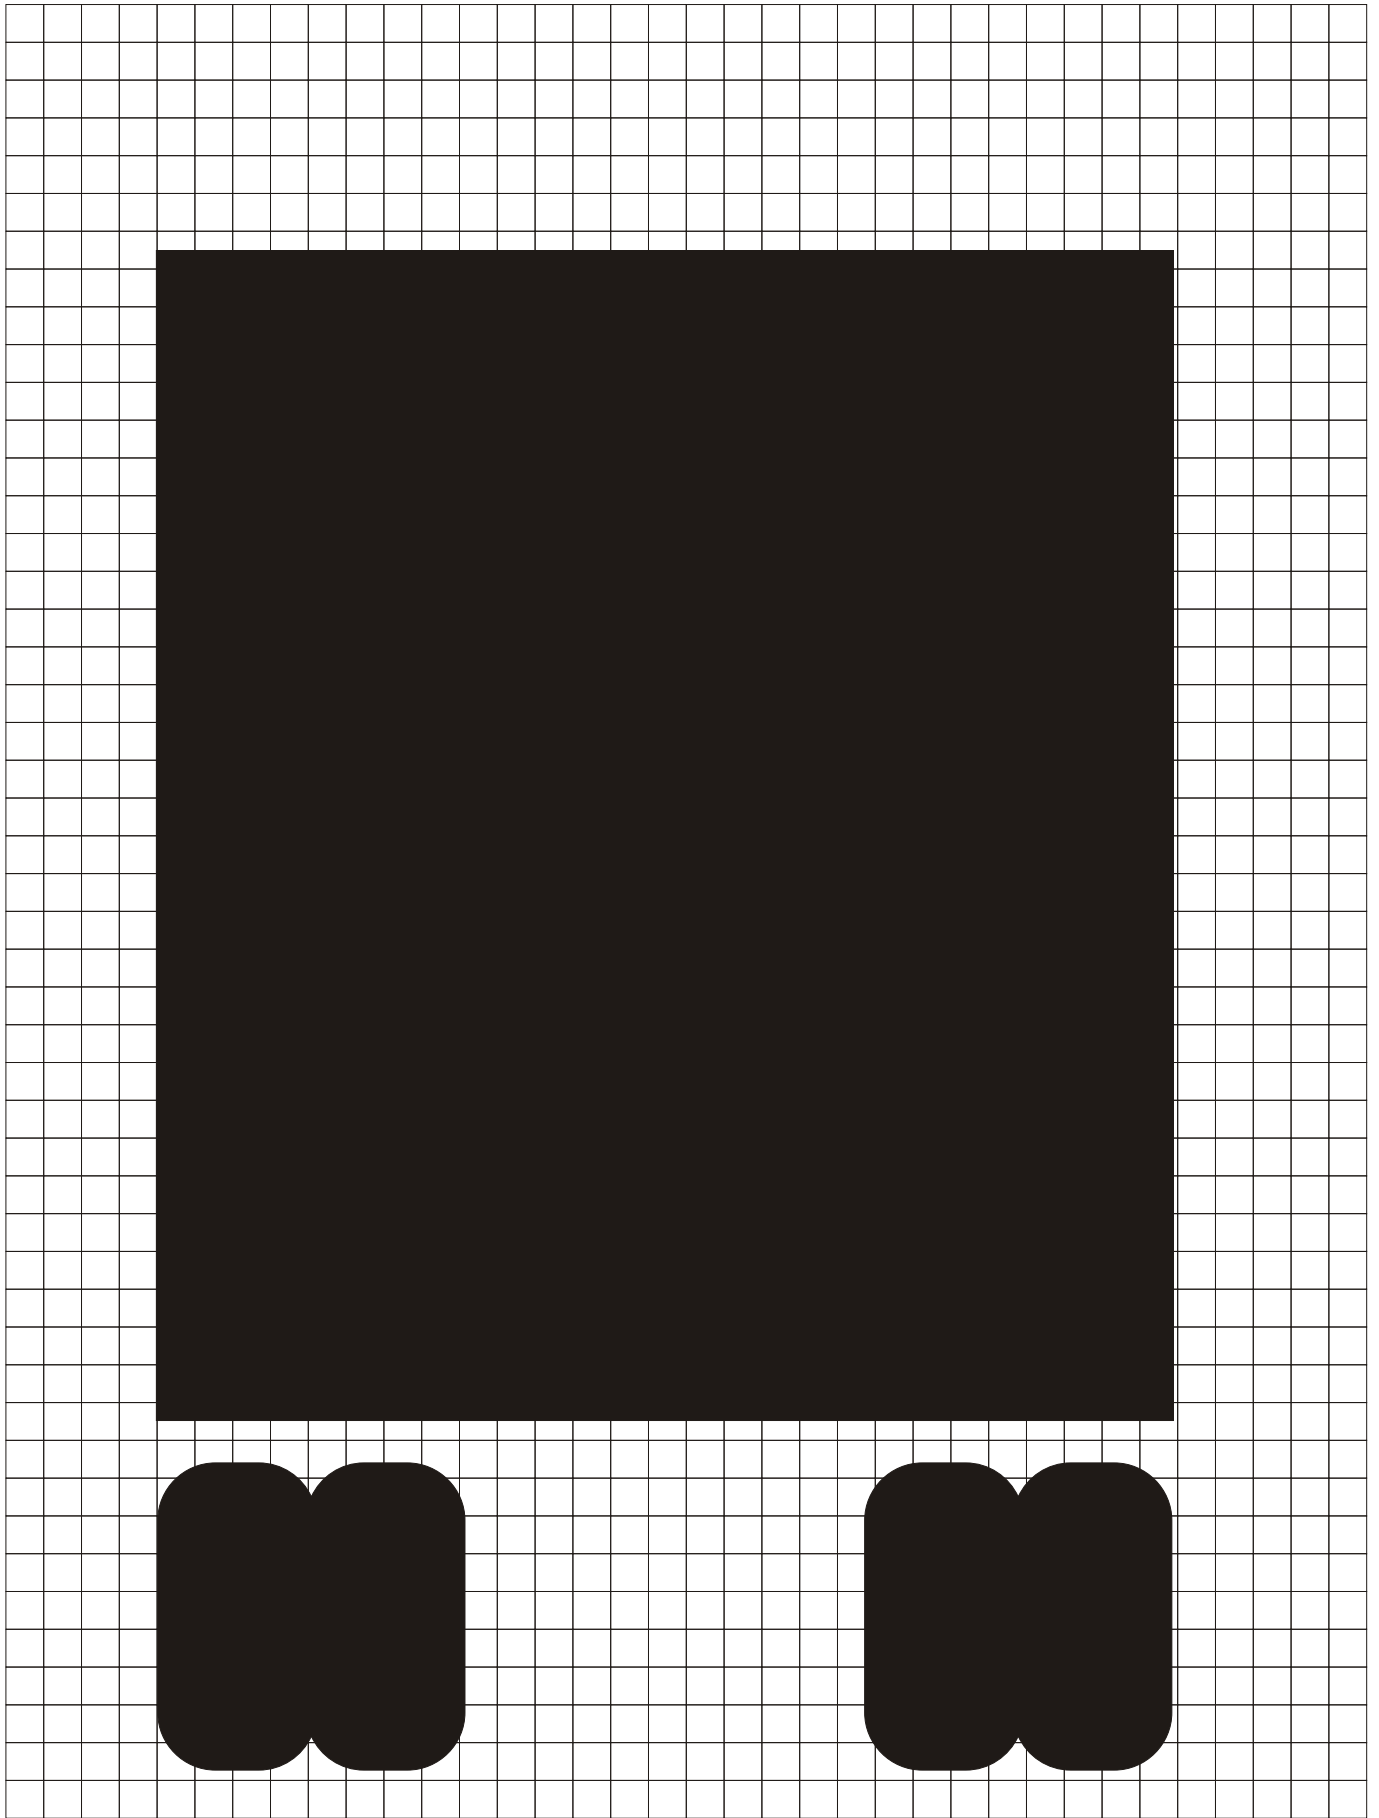

CARDINAL DIRECTION SPACING WITH VARIOUS FONTS AND SIZES



5-W FONT

DIMENSIONS (INCHES)		NORTH	SOUTH	EAST	WEST
A	B	C			
5	4	1.424	1.423	0.814	1.017
7	6	2.135	2.135	1.221	1.525
10	8	2.847	2.848	1.627	2.034
12	10	3.559	3.560	2.034	2.543
15	12	4.271	4.271	2.441	3.051

4-W FONT

DIMENSIONS (INCHES)		NORTH	SOUTH	EAST	WEST
A	B	C			
5	4	1.243	1.242	0.700	0.949
6	5	1.554	1.554	0.876	1.187
7	6	1.864	1.864	1.051	1.424
9	8	2.486	2.486	1.401	1.899
10	8	2.486	2.486	1.401	1.899

3-W FONT

DIMENSIONS (INCHES)		NORTH	SOUTH	EAST	WEST
A	B	C			
5	4	1.017	1.017	0.519	0.655
6	5	1.271	1.272	0.650	0.819
7	6	1.525	1.525	0.779	0.983
9	8	2.033	2.034	1.040	1.311
10	8	2.033	2.034	1.040	1.311


2-W FONT

DIMENSIONS (INCHES)		NORTH	SOUTH	EAST	WEST
A	B	C			
5	4	0.972	0.972	0.497	0.656
6	5	1.215	1.215	0.621	0.820
7	6	1.458	1.457	0.746	0.983
9	8	1.944	1.943	0.994	1.310
10	8	1.944	1.943	0.994	1.310

1-W FONT

DIMENSIONS (INCHES)		NORTH	SOUTH	EAST	WEST
A	B	C			
5	4	0.927	0.926	0.565	0.610
6	5	1.158	1.158	0.706	0.763
7	6	1.390	1.390	0.848	0.915
9	8	1.853	1.853	1.130	1.220
10	8	1.853	1.853	1.130	1.220

FRACTION SPACING WITH VARIOUS FONTS AND SIZES

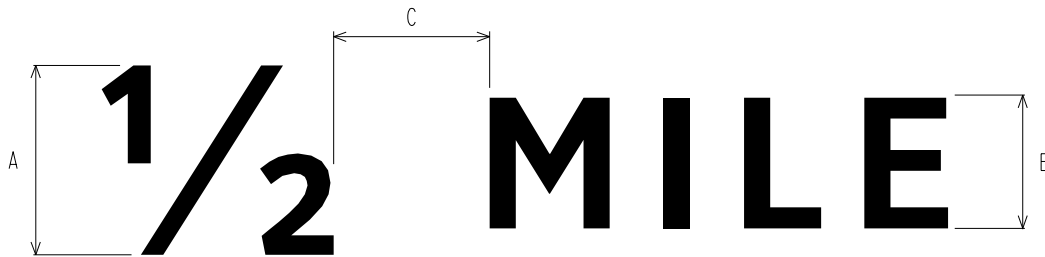

2-W FONT

DIMENSIONS (INCHES)		
A	B	C
5	4	4

3-W FONT

DIMENSIONS (INCHES)		
A	B	C
7.5	6	6
8	6	6
10	7	8
10	8	8
12	10	9

4-W FONT

DIMENSIONS (INCHES)		
A	B	C
9	7	7
15	12	11

5-W FONT

DIMENSIONS (INCHES)		
A	B	C
12	10	9
15	12	11

C FONT

DIMENSIONS (INCHES)		
A	B	C
4	3	3
5	4	4
6	5	5
8	6	6
10	7	8
10	8	8

D FONT


DIMENSIONS (INCHES)		
A	B	C
10	8	8
12	10	9

E FONT

DIMENSIONS (INCHES)		
A	B	C
9	7	7
15	12	11

E MOD FONT

DIMENSIONS (INCHES)		
A	B	C
9	7	7
15	12	11
16	13	12

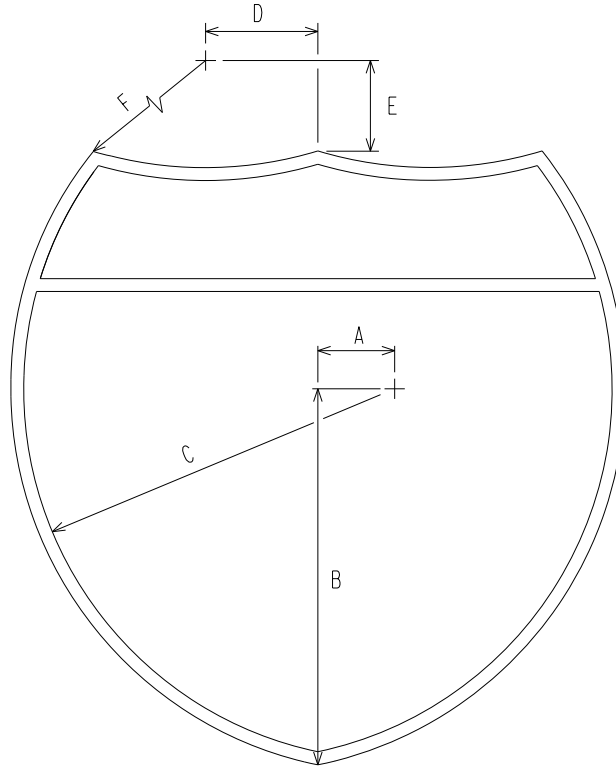


INTERSTATE ROUTE MARKER
FOR INDEPENDENT & GUIDE SIGN USE

SIGNS	DIMENSIONS (INCHES)					
	A	B	C	D	E	F
1-2 DIGITS 18"	2.91	11.04	10.88	3.29	10.76	11.25
1-2 DIGITS 24"	3	14.69	14.5	4.38	14.35	15
1-2 DIGITS 36"	4.5	22.03	21.75	6.58	21.52	22.5
1-2 DIGITS 48"	6	29.37	29	8.77	28.69	30
3 DIGITS 18" X 22.5"	1.5	12.66	12.37	5.04	17.28	18
3 DIGITS 24" X 30"	2	16.88	16.5	6.72	23.04	24
3 DIGITS 36" X 45"	3	25.32	24.75	10.08	34.56	36
3 DIGITS 48" X 60"	4	33.76	33	13.44	46.08	48

COLORS

LEGEND & BORDER - WHITE (REFL.)
 BACKGROUND - TOP, RED (REFL.)
 BOTTOM, BLUE (REFL.)

6-63.10 (MI)

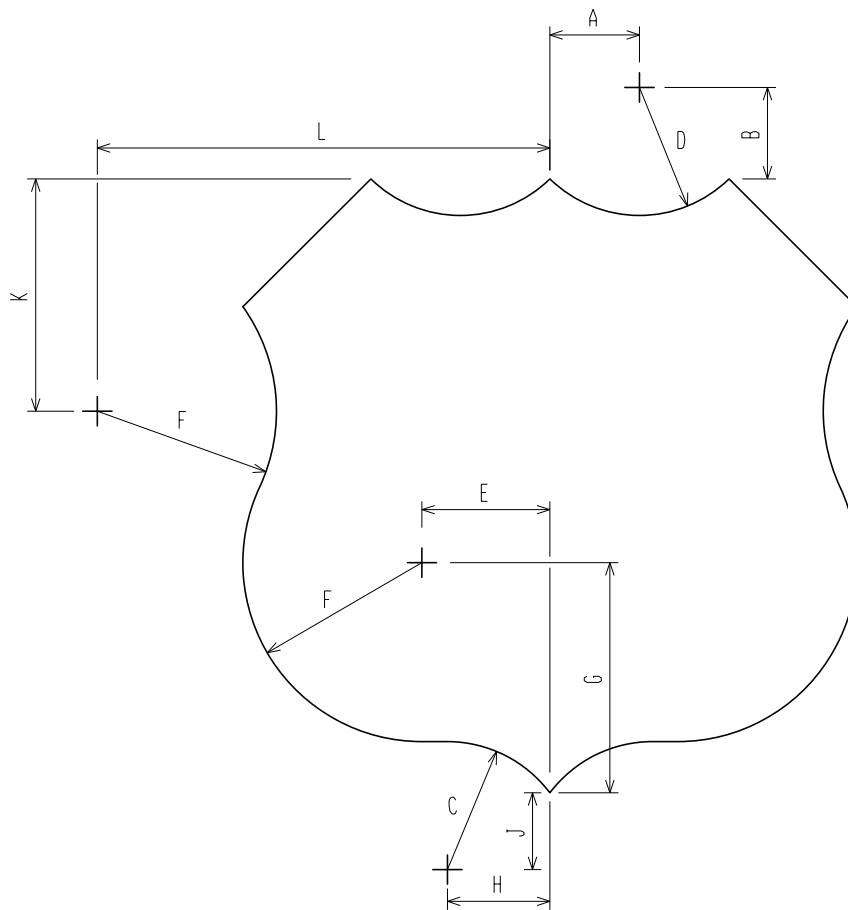


U.S. ROUTE MARKER FOR INDEPENDENT USE

SIGNS	DIMENSIONS (INCHES)										
	A	B	C	D	E	F	G	H	J	K	L
1-2 DIGITS 18"	2.52	2.57	3.59	3.59	3.59	5.03	6.47	2.875	2.16	6.53	12.71
1-2 DIGITS 24"	3.35	3.42	4.79	4.79	4.79	6.71	8.62	3.83	2.87	8.7	16.94
1-2 DIGITS 36"	5.03	5.13	7.19	7.19	7.19	10.06	12.93	5.75	4.31	13.05	25.42
1-2 DIGITS 48"	6.71	6.84	9.58	9.58	9.58	13.41	17.24	7.66	5.75	17.4	33.89
3 DIGITS 18" X 22.5"	3.59	5.38	3.59	6.47	5.75	5.03	6.47	2.875	2.16	6.53	14.87
3 DIGITS 24" X 30"	4.79	7.17	4.79	8.63	7.67	6.71	8.62	3.83	2.87	8.7	19.83
3 DIGITS 36" X 45"	7.19	10.76	7.19	12.94	11.5	10.06	12.93	5.75	4.31	13.05	29.74
3 DIGITS 48" X 60"	9.58	14.34	9.58	17.25	15.33	13.41	17.24	7.66	5.75	17.4	39.65

COLORS

LEGEND - BLACK (NON-REFL.)
BACKGROUND - WHITE (REFL.)

6-63.20 (MI)

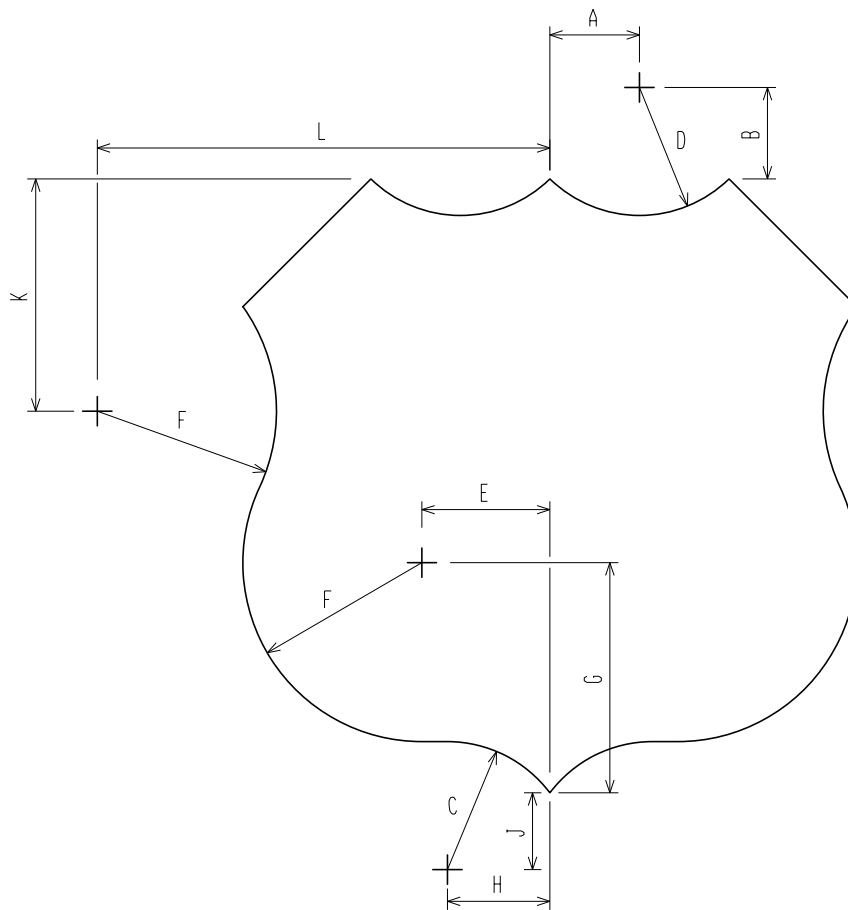


U.S. ROUTE MARKER
FOR GUIDE SIGN USE

SIGNS	DIMENSIONS (INCHES)										
	A	B	C	D	E	F	G	H	J	K	L
1-2 DIGITS 18"	2.62	2.68	3.75	3.75	3.75	5.25	6.75	3	2.25	6.81	13.26
1-2 DIGITS 24"	3.5	3.57	5	5	5	7	9	4	3	9.08	17.68
1-2 DIGITS 36"	5.25	5.35	7.5	7.5	7.5	10.5	13.5	6	4.5	13.62	26.52
1-2 DIGITS 48"	7	7.14	10	10	10	14	18	8	6	18.16	35.36
3 DIGITS 18" X 22.5"	3.75	5.61	3.75	6.75	6	5.25	6.75	3	2.25	6.81	15.52
3 DIGITS 24" X 30"	5	7.48	5	9	8	7	9	4	3	9.08	20.69
3 DIGITS 36" X 45"	7.5	11.22	7.5	13.5	12	10.5	13.5	6	4.5	13.62	31.03
3 DIGITS 48" X 60"	10	15	10	18	16	14	18	8	6	18.16	41.37

COLORS

LEGEND - BLACK (NON-REFL.)
BACKGROUND - WHITE (REFL.)







6-63.25 (MI)

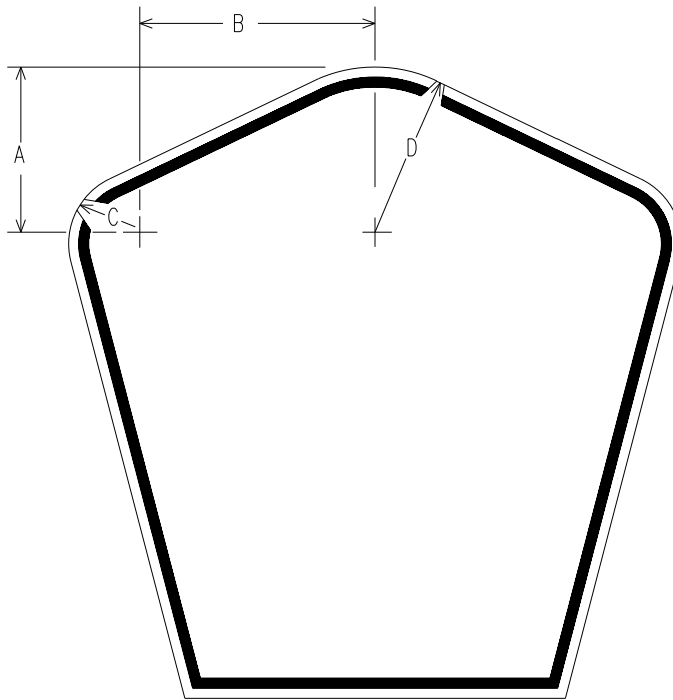


SIGN	DIMENSIONS (INCHES)			
	A	B	C	D
MIN.	5	7	2	5
STD.	6.688	9.313	2.688	6.688
SPECIAL	8.313	11.688	3.313	8.313
EXPWY & FRWY	10	14	4	10

6-63.30 (MI)

ROUNABOUT SYMBOL DETAILS

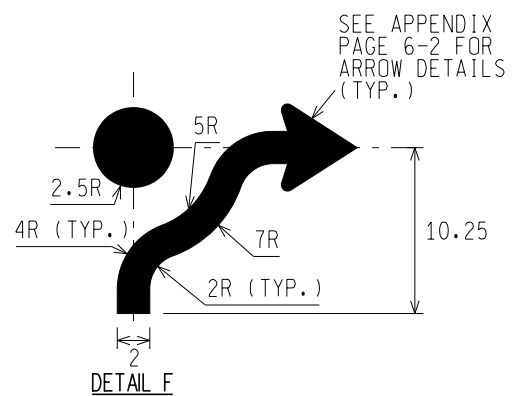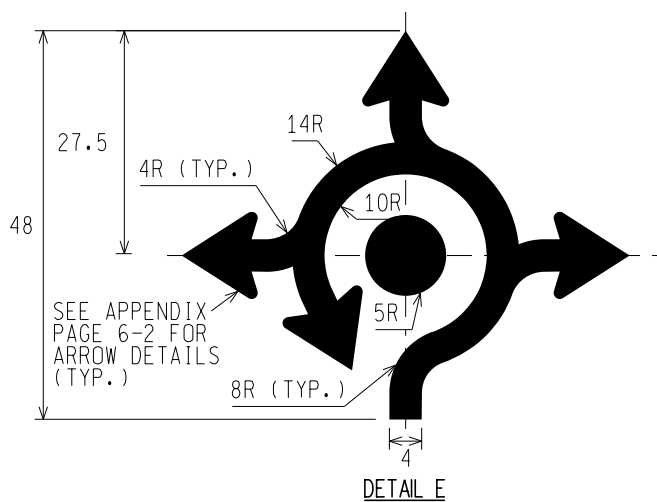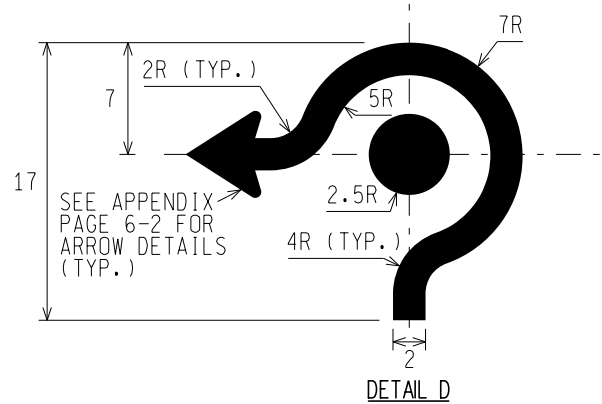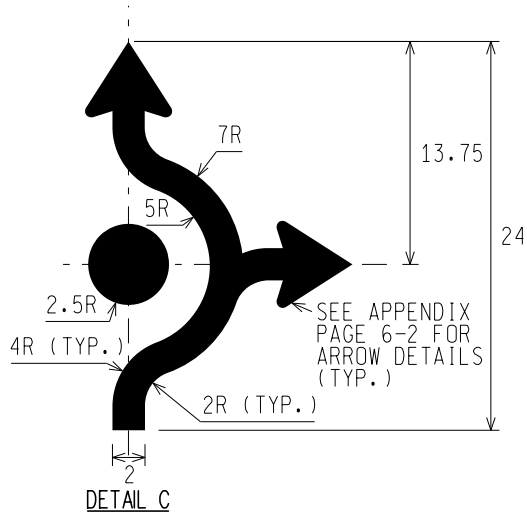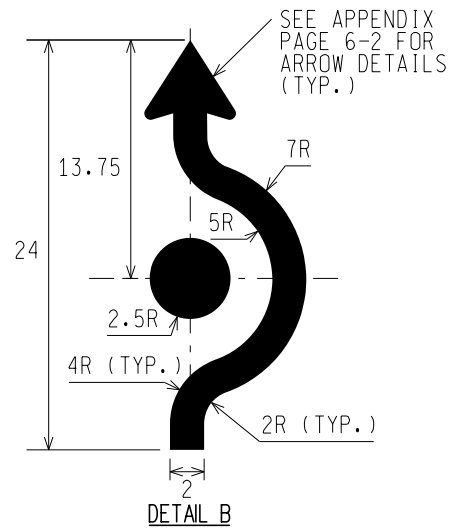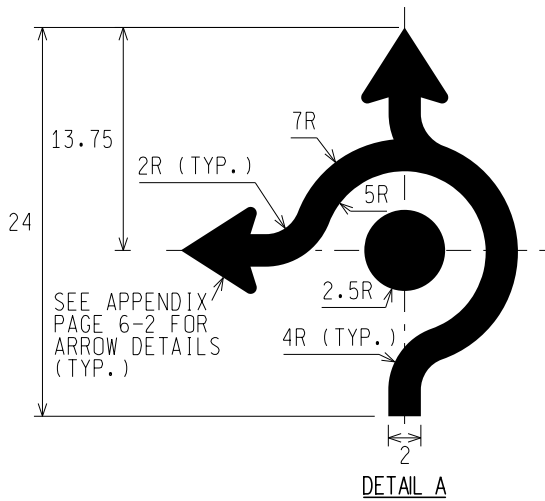

Overhead Arrow-Per-Lane Guide Signs for Option Lanes

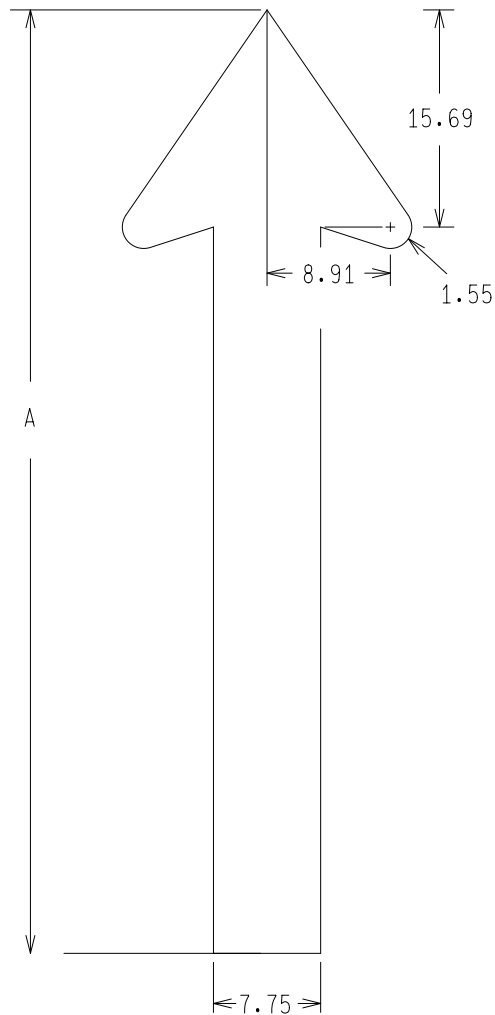

Notes:


- 1) Arrows are to be used for Option Lane situations having appropriate Pavement Markings only.
- 2) To identify the movement of each lane, the Arrow on the Sign must be positioned directly over the lane to which it applies.

PANEL	DIMENSIONS (IN)
	A
I	66
II	54

Overhead Arrow-Per-Lane (Thru)

6-65.0 (M)

Overhead Arrow-Per-Lane Guide Signs for Option Lanes

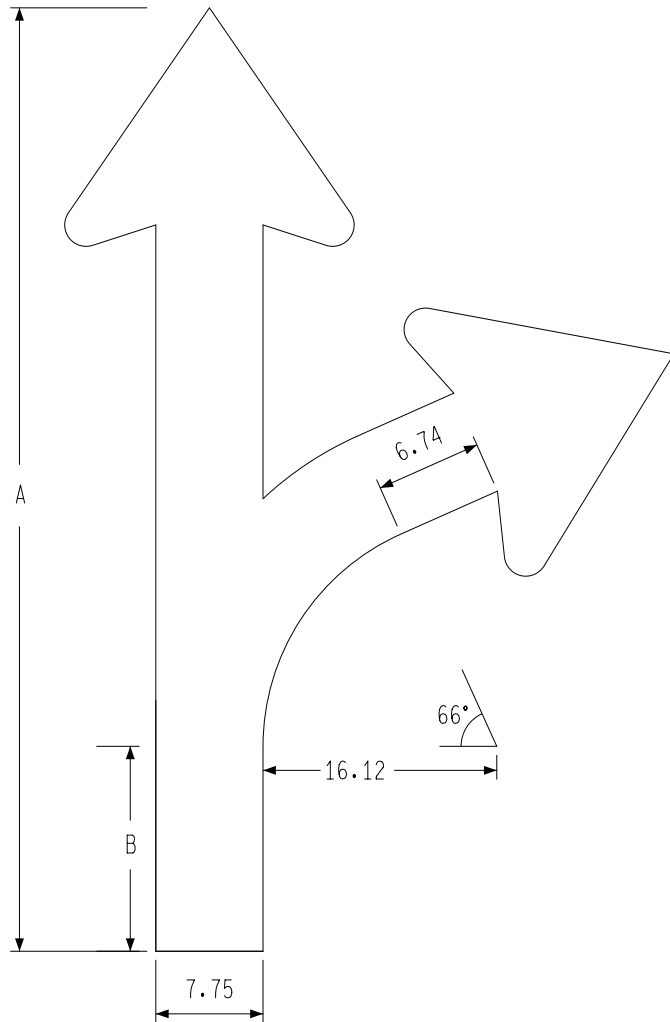

Notes:


- 1) For Arrow head specifications, Refer to Pg 6-65.0.
- 2) Arrows are to be used for Option Lane situations having appropriate Pavement Markings only.
- 3) To identify the movement of each lane, the Arrow on the Sign must be positioned directly over the lane to which it applies.
- 4) Arrows for Left movement are mirror images of those detailed herein.

PANEL	DIMENSIONS (INCHES)	
	A	B
I	66	14.29
II	54	2.29

Overhead Arrow-Per-Lane (Thru and Curve)

6-65.1 (MI)

Overhead Arrow-Per-Lane Guide Signs for Option Lanes

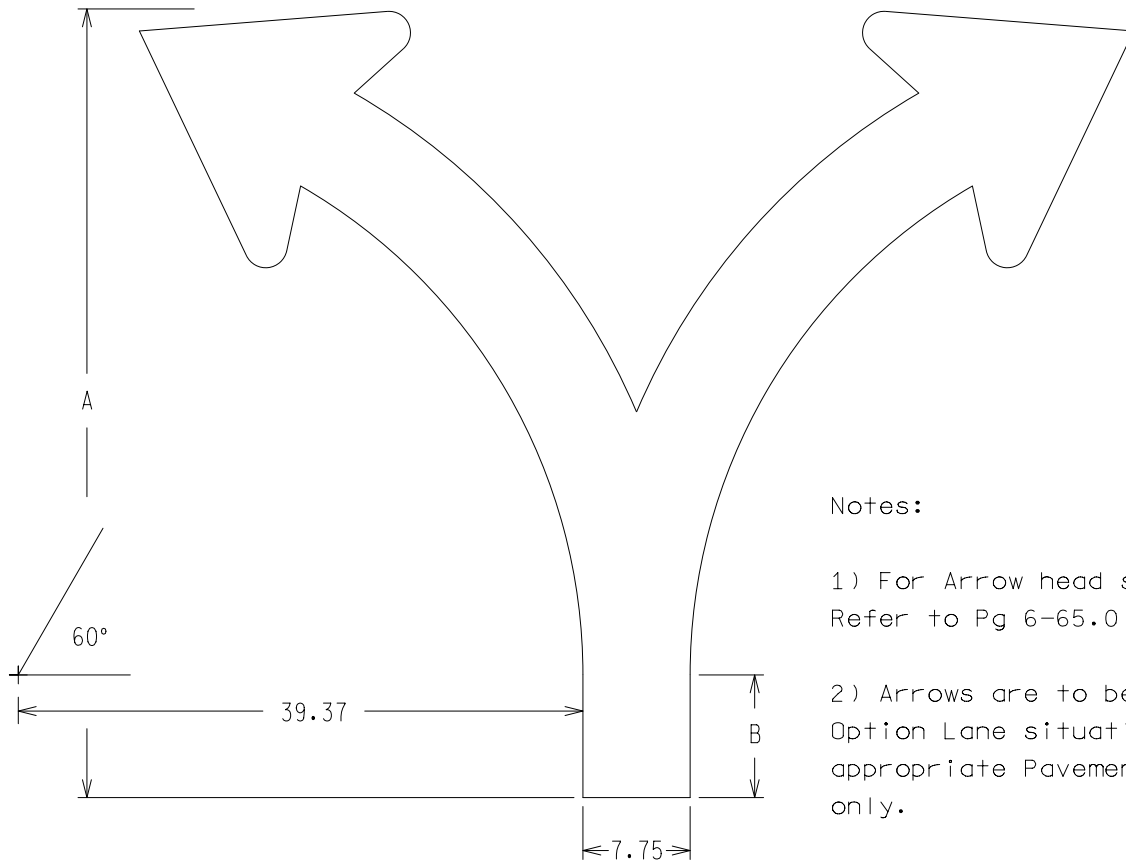

Notes:


- 1) For Arrow head specifications, Refer to Pg 6-65.0
- 2) Arrows are to be used for Option Lane situations having appropriate Pavement Markings only.
- 3) To identify the movement of each lane, the Arrow on the Sign must be positioned directly over the lane to which it applies.

PANEL	DIMENSIONS (INCHES)	
	A	B
I	55	8.28
II	54	7.28

OVERHEAD ARROW-PER-LANE (SPLIT)

6-65.2 (MI)

Overhead Arrow-Per-Lane Guide Signs for Option Lanes

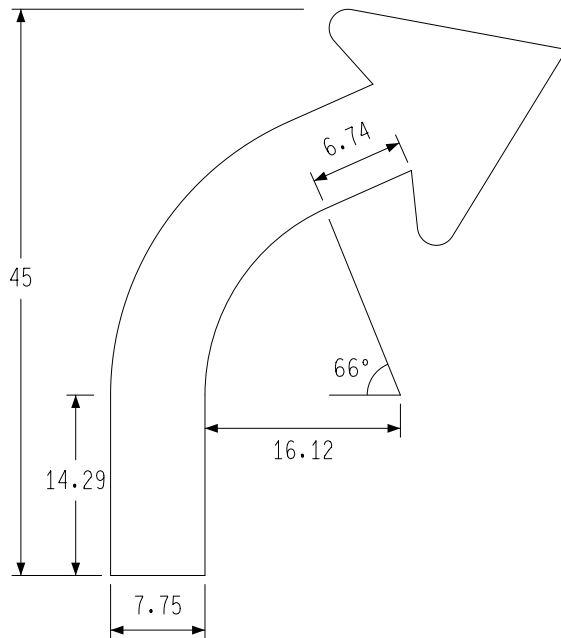


Notes:

- 1) For Arrow head specifications, Refer to Pg 6-65.0.
- 2) Arrows are to be used for Option Lane situations having appropriate Pavement Markings only.
- 3) To identify the movement of each lane, the Arrow on the Sign must be positioned directly over the lane to which it applies.
- 4) Arrows for Left movement are mirror images of those detailed herein.
- 5) Use arrow for both panel I and II


Overhead Arrow-per-Lane (Curve)

6-65.3 (MI)

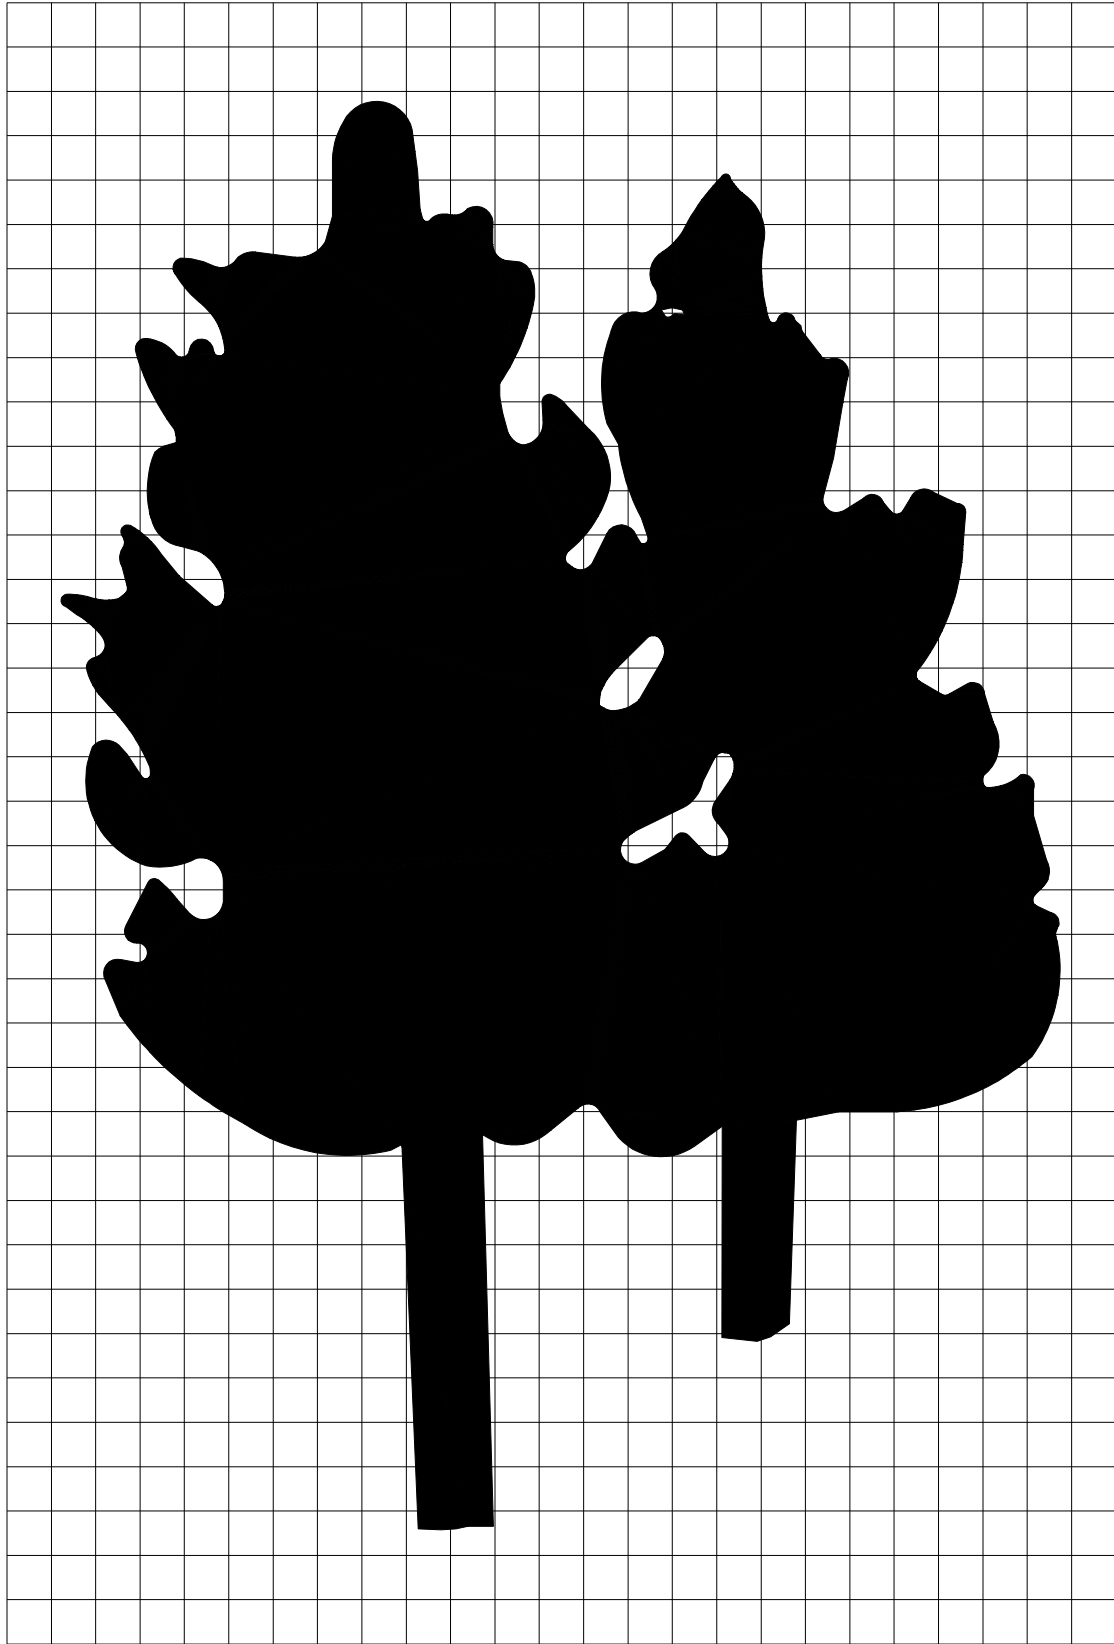

ADOPT-A-HIGHWAY (LEFT TREE)

6-66 (MI)

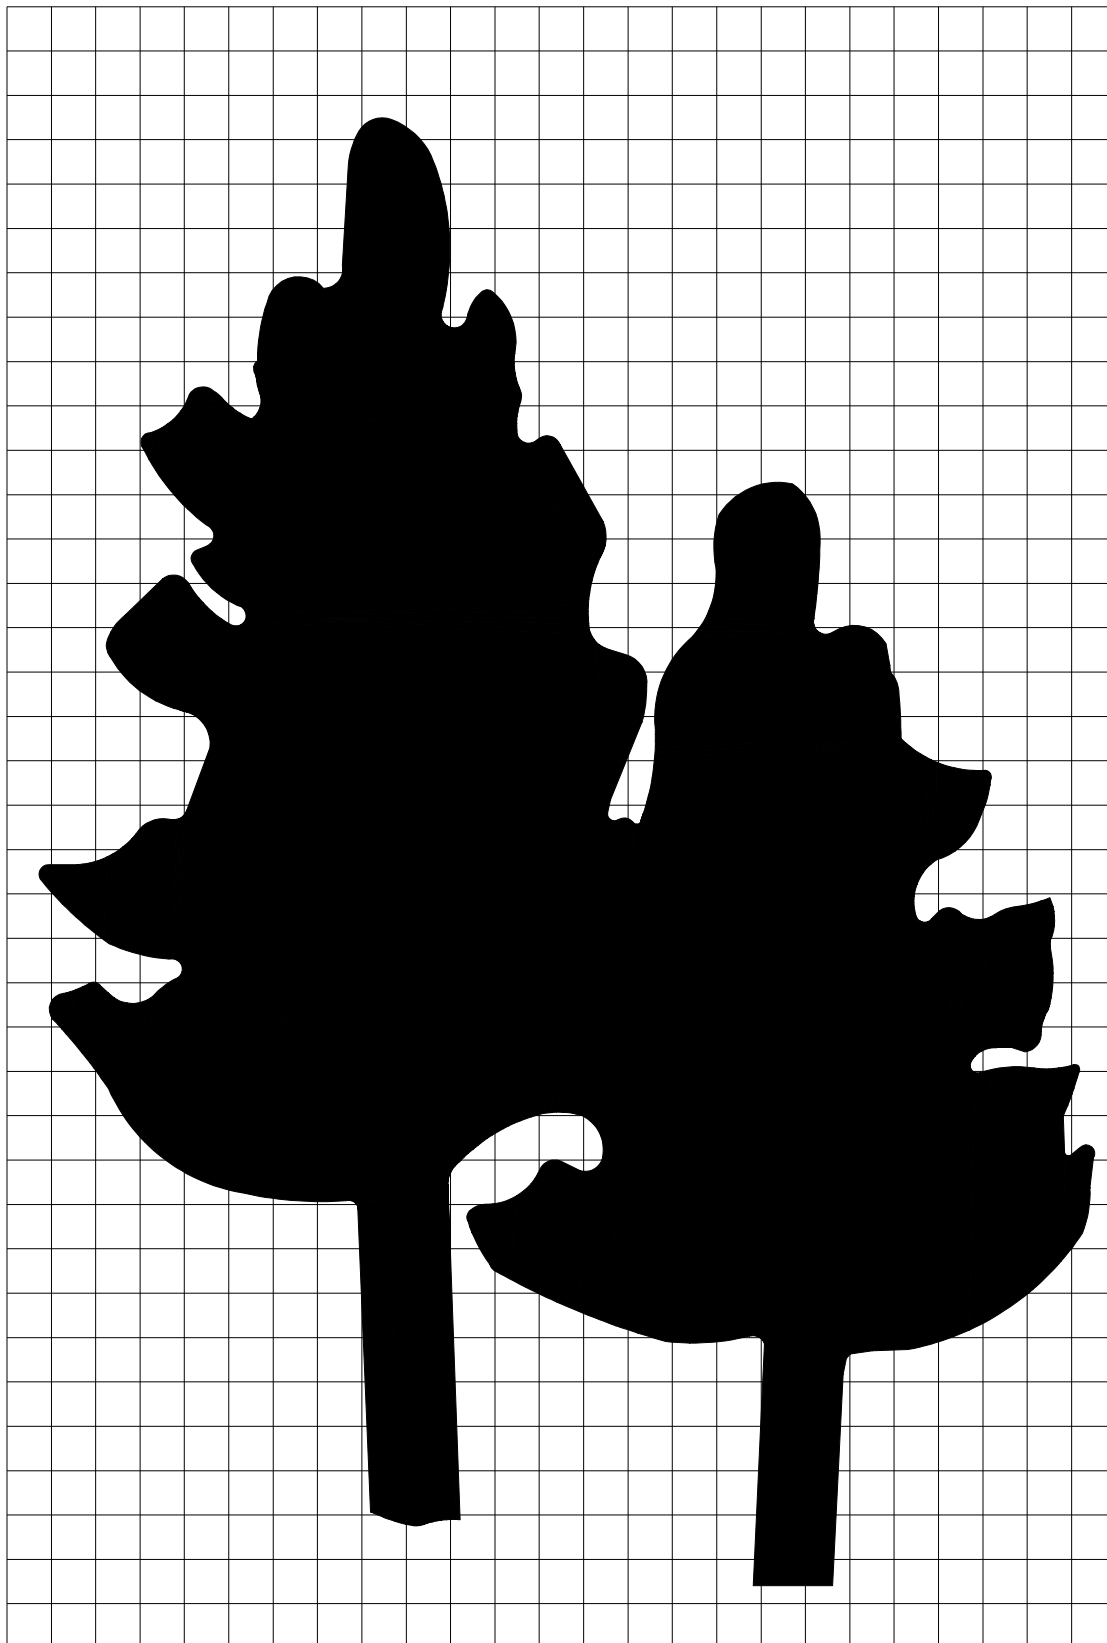

ADOPT-A-HIGHWAY (RIGHT TREE)


6-66.1 (MI)

PW:RD/TS/Typ/Final/Sign/StdHwySgn/ApndxMisc/Adopt-a-hwy-Rtree

REVISION DATE: 12/21/2010 KL


DRAWN BY: KL

CHECKED BY:

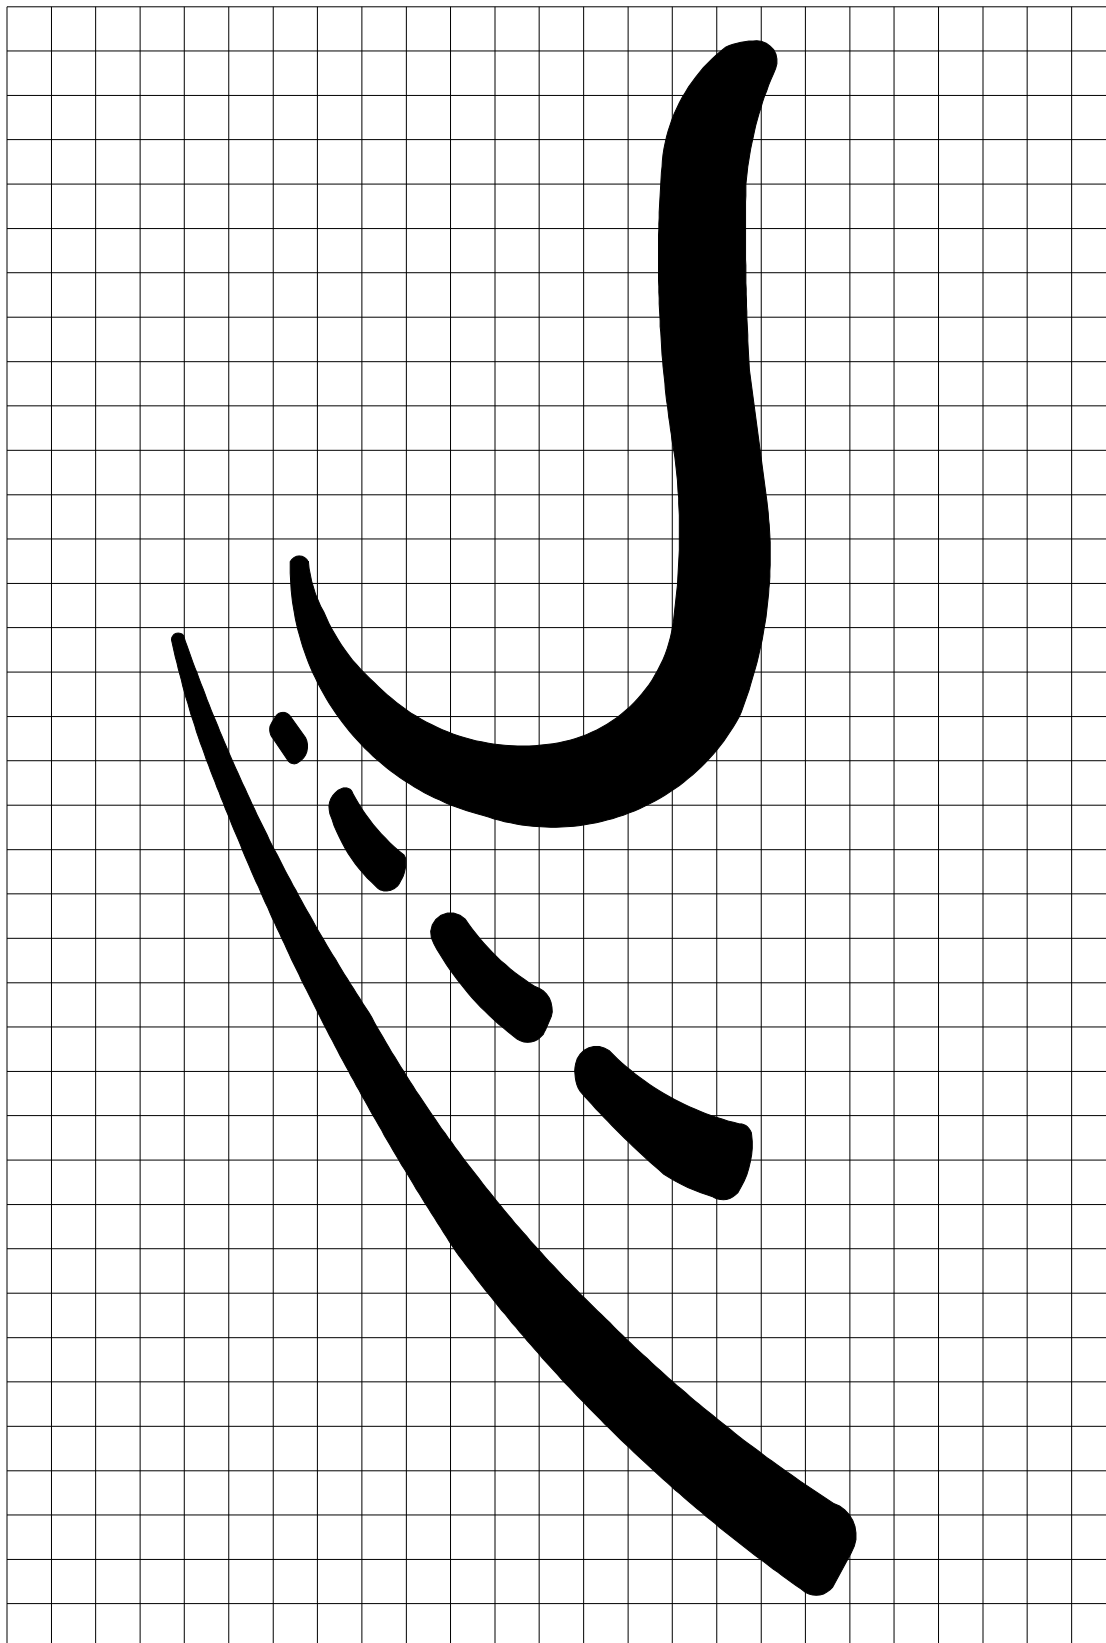

ADOPT-A-HIGHWAY (ROAD)

6-66.2 (MI)

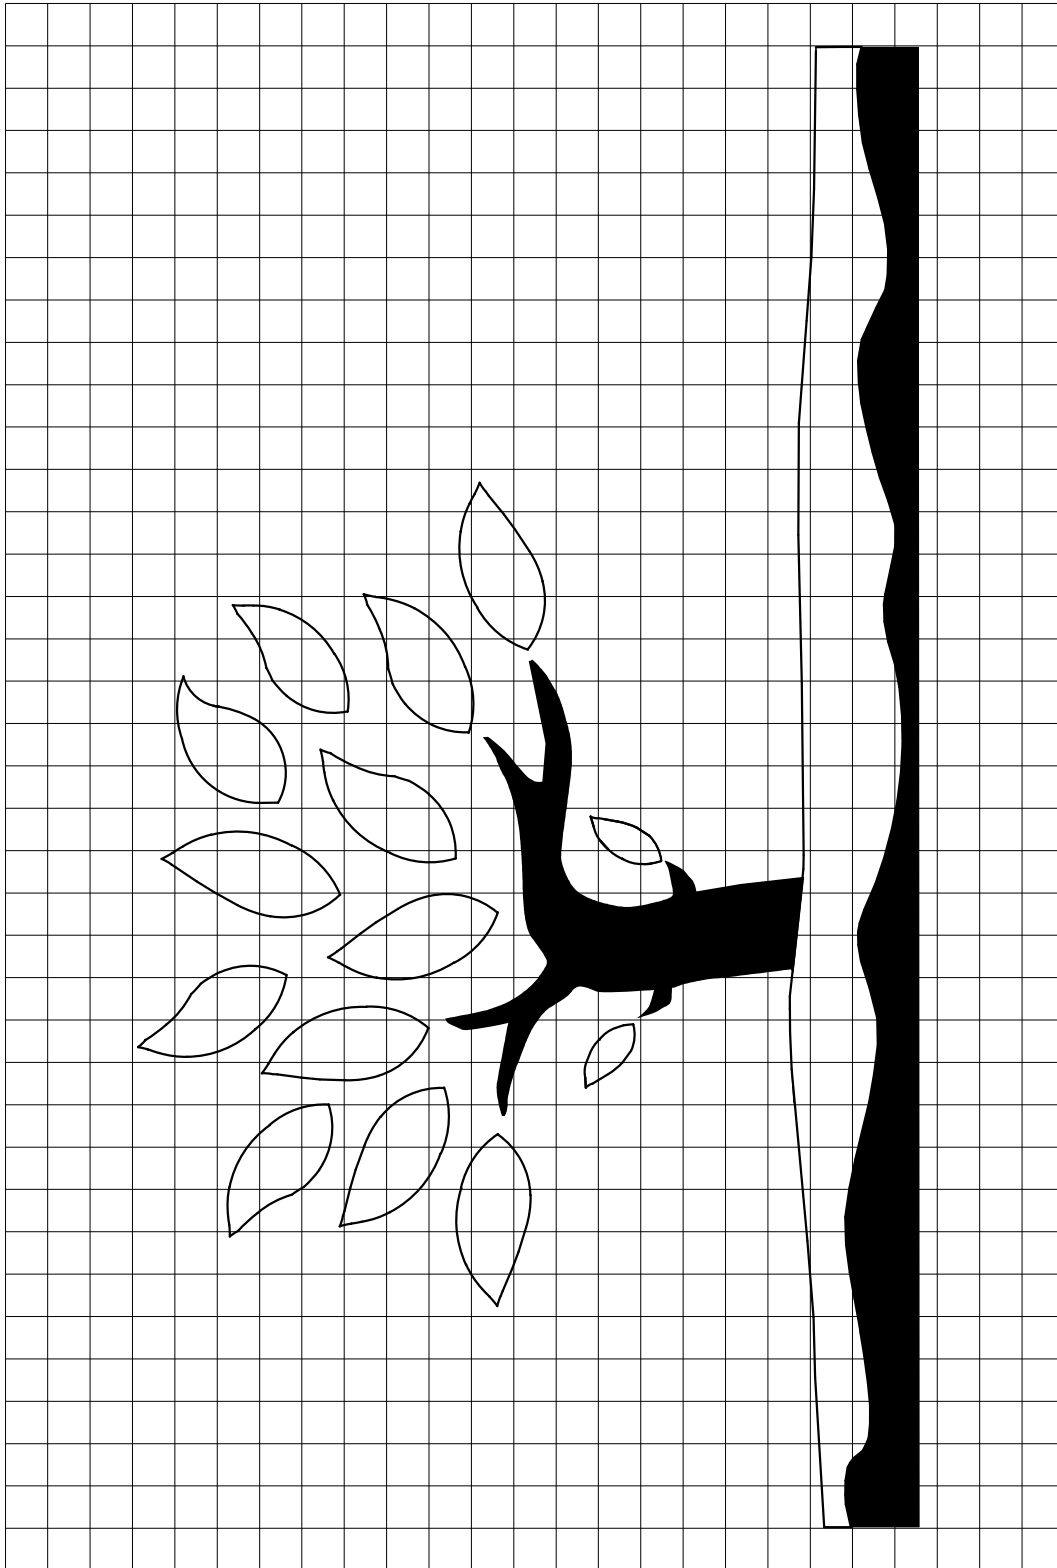

ADOPT-A-LANDSCAPE (TREE+LEAVES)

6-66.3 (MI)