



12", 3 SECTION

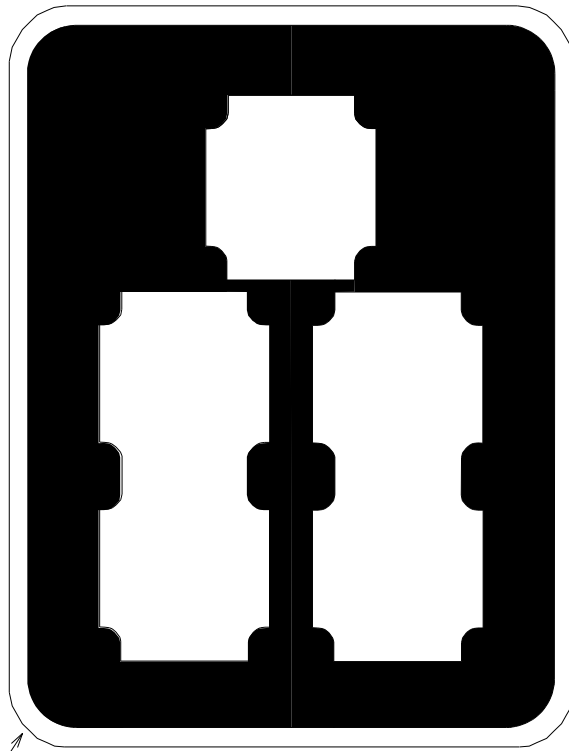

12", 5 SECTION

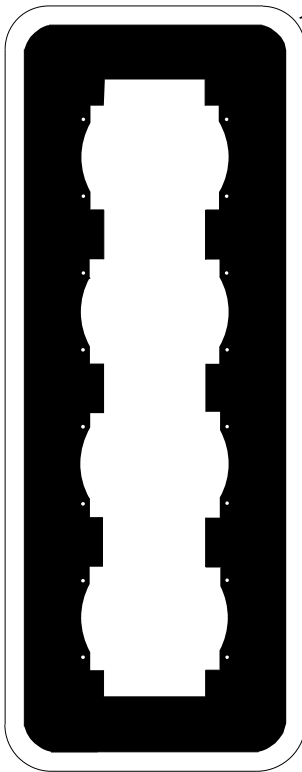

12", 4 SECTION

ASTM Type Reflective yellow,
and fluorescent yellow tape border

NOTES:

- 1) Backplates are to be used for mast arm type (fixed support) or tethered span wire type installations as indicated on the plans or as directed by the Engineer.
- 2) Backplates must be a one piece construction unless otherwise directed by the Engineer.
- 3) Do not cut the backplate for installation.
- 4) Use one inch border ASTM Type (Reflective yellow, and fluorescent yellow tape border) and Yellow signal heads with visors.

TRAFFIC SIGNAL BACKPLATES

NOT TO SCALE

File: RefDoc/TR/Signals/Web/Sp Det/Fin/SIG304A.dgn Rev. 11/13/20



PREPARED BY
TRAFFIC AND SAFETY

DRAWN BY:
CHECKED BY:

ENGINEER OF DELIVERY

ENGINEER OF DEVELOPMENT
(SPECIAL DETAIL)
FHWA APPROVAL DATE

MICHIGAN DEPARTMENT OF TRANSPORTATION
BUREAU OF HIGHWAYS DELIVERY STANDARD PLAN FOR

TRAFFIC SIGNAL BACKPLATES

PLAN DATE

SIG-304-A

SHEET
1 of 1