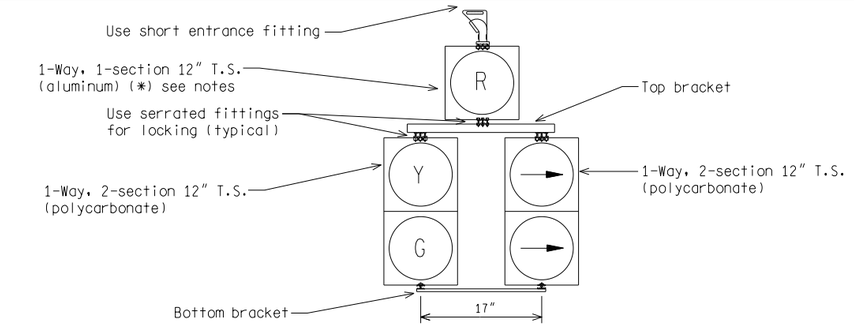

5-SECTION CLUSTER (DOGHOUSE) TRAFFIC SIGNAL

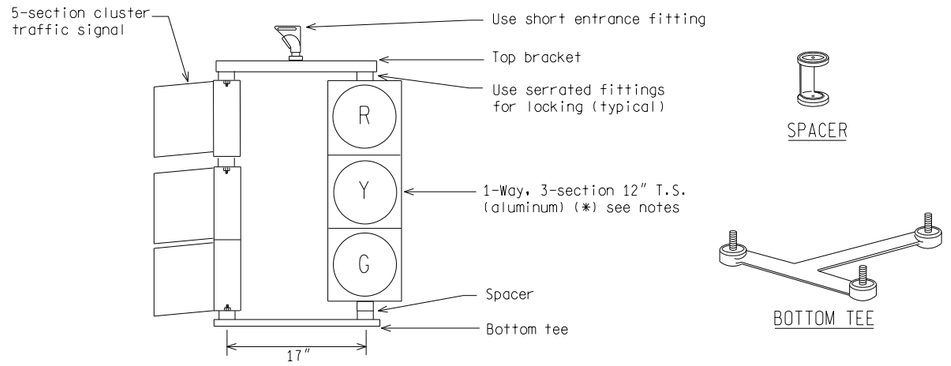

COMBINATION 5-SECTION CLUSTER & 1-WAY T.S. (ALUMINUM)

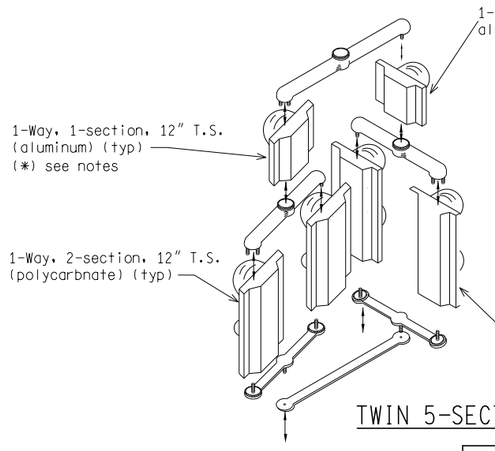

(*) NOTES:

1) Traffic signals must conform to the current ITE publication "Vehicle Traffic Control Signal Heads."
2) Provide cast aluminum alloy housings with a 2" diam. hole top and bottom to receive 1 1/2" inch supporting pipe.
3) Provide a detachable, sheet aluminum visor (min. 0.057" thick), for each signal indication.
4) Provide twist on slots for visor mounting that are either in the visor or on the tabs formed on the visor.

TWIN 5-SECTION CLUSTER TRAFFIC SIGNAL

NOT TO SCALE

File: RefDoc/TR/Signals/Web/Sp Det/Fin/SIG302A.dgn Rev. 02/16/17

MDOT Michigan Department of Transportation

PREPARED BY TRAFFIC AND SAFETY

DRAWN BY: DJF

CHECKED BY:

ENGINEER OF DELIVERY

ENGINEER OF DEVELOPMENT

(SPECIAL DETAIL)

FHWA APPROVAL DATE

MICHIGAN DEPARTMENT OF TRANSPORTATION
BUREAU OF HIGHWAYS DELIVERY STANDARD PLAN FOR

BRACKETING FOR 5-SECTION HEADS

PLAN DATE

SIG-302-A

SHEET 1 of 1

AS-LET PLAN REVISIONS

NO.	DATE	AUTH	DESCRIPTION	NO.	DATE	AUTH	DESCRIPTION

MDOT Michigan Department of Transportation

	DATE:	CS:		DRAWING	SHEET
	DESIGN UNIT:	JN:			
FILE:	TSC:				