



12", 3 SECTION

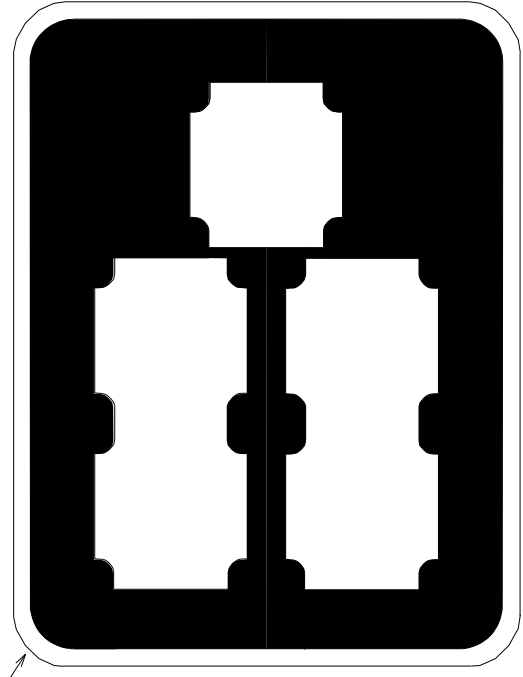

12", 5 SECTION

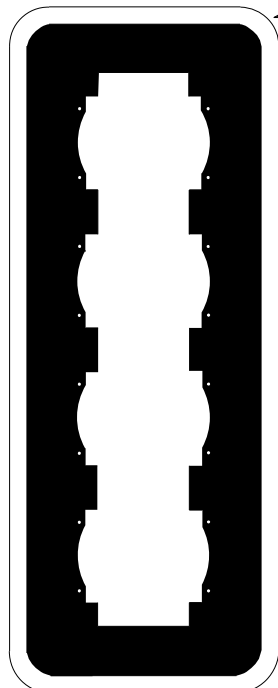

12", 4 SECTION

ASTM Type Reflective yellow,
and fluorescent yellow tape border


NOTES:

- 1) Backplates are to be used for mast arm type (fixed support) or tethered span wire type installations as indicated on the plans or as directed by the Engineer.
- 2) Backplates must be a one piece construction unless otherwise directed by the Engineer.
- 3) Do not cut the backplate for installation.
- 4) Use one inch border ASTM Type (Reflective yellow, and fluorescent yellow tape border) and Yellow signal heads with visors.

TRAFFIC SIGNAL BACKPLATES

NOT TO SCALE

File: RefDoc/TR/Signals/Web/Sp Det/Fin/SIG304A.dgn Rev. 11/13/20

 MICHIGAN DEPARTMENT OF TRANSPORTATION PREPARED BY TRAFFIC AND SAFETY	ENGINEER OF DELIVERY _____ ENGINEER OF DEVELOPMENT _____ (SPECIAL DETAIL) FHWA APPROVAL DATE	MICHIGAN DEPARTMENT OF TRANSPORTATION BUREAU OF HIGHWAYS DELIVERY STANDARD PLAN FOR TRAFFIC SIGNAL BACKPLATES	
	DRAWN BY: CHECKED BY:		PLAN DATE

FINAL ROW PLAN REVISIONS				(SUBMITTAL DATE:)			
NO.	DATE	AUTH	DESCRIPTION	NO.	DATE	AUTH	DESCRIPTION



NO SCALE

FILE:	DATE:	CS:	DRAWING	SHEET
	DESIGN UNIT:	JN:		
	TSC:			