


PLAN OF FRAME

SECTION B - B

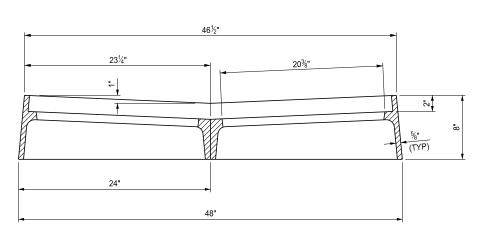

SECTION A - A

APPROVED BY:

DIRECTOR, BUREAU OF FIELD SERVICES

APPROVED BY:

DIRECTOR, BUREAU OF DEVELOPMENT

Michigan Department of Transportation

DEPARTMENT DIRECTOR
BRADLEY C. WIEFERICH, PE


STANDARD PLAN FOR
COVER VG
FOR USE WITH CONCRETE VALLEY GUTTER

SPECIAL DETAIL
FHWA APPROVAL


04/14/2025 PLAN DATE

R-24-G


SHEET 1 OF 3

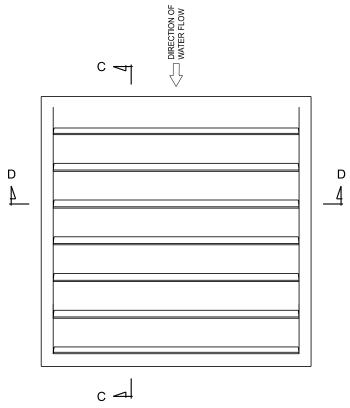

## PLAN OF GRATE

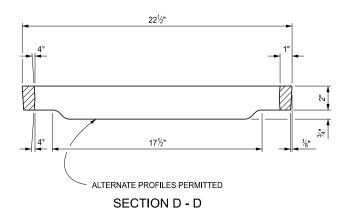

**GRAY IRON CASTING** 

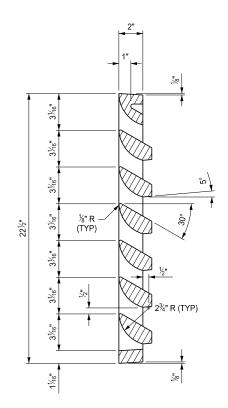



SECTION C - C



STANDARD PLAN FOR
COVER VG
FOR USE WITH CONCRETE VALLEY GUTTER


SPECIAL DETAIL	04/14/2025	D 24 C	SHEET
FHWA APPROVAL	PLAN DATE	K-24-G	2 OF 3

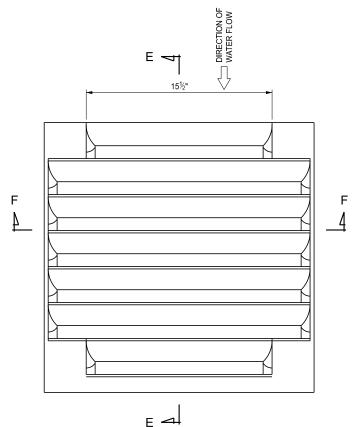

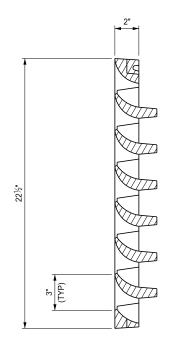

PLAN OF GRATE

SECTION E - E

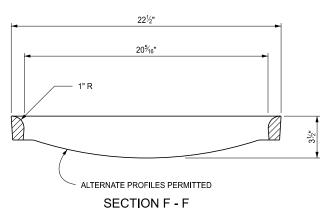

## **DUCTILE IRON CASTING**

## NOTES:

ENSURE THE CASTINGS MEET THE REQUIREMENTS OF THE STANDARD SPECIFICATIONS FOR CONSTRUCTION FOR GRAY IRON OR DUCTILE IRON CASTINGS.

CLEAN ALL CASTINGS BY CURRENT APPROVED BLASTING METHODS.

ENSURE CASTINGS ARE FREE OF POURING FAULTS, BLOW HOLES, CRACKS, AND OTHER IMPERFECTIONS. ENSURE CASTINGS ARE SOUND, TRUE TO FORM AND THICKNESS, CLEAN AND NEATLY FINISHED, AND COATED WITH COAL TAR PITCH VARNISH.

GRIND OR MACHINE THE SEATING FACE OF GRATE AND THE SEAT FOR THE SAME ON THE FRAME SO THAT THE GRATE WILL HAVE AN EVEN BEARING ON ITS SEAT TO PREVENT ROCKING OR TILTING.

THIS COVER IS DESIGNED TO FIT ON ANY INLET, CATCH BASIN, OR ON ANY EXISTING SIMILAR STRUCTURE WHEN SO DESIGNATED ON THE PLANS.

GRATE MAY BE PROVIDED WITH BOLTING CAPABILITY. PROVIDE (4) COUNTER BORED HOLES, ONE AT EACH CORNER OF THE GRATE AND A FRAME WITH (4) THREADED HOLES TO SUFFICIENTLY RECEIVE GRATE BOLTS. ENSURE HOLE DIAMETERS AND BOLTS CONFORM TO THE MANUFACTURER'S DETAILS AND SPECIFICATIONS.



STANDARD PLAN FOR
COVER VG
FOR USE WITH CONCRETE VALLEY GUTTER

 (SPECIAL DETAIL)
 04/14/2025
 SHEET

 FHWA APPROVAL
 PLAN DATE
 R-24-G
 3 0F 3