




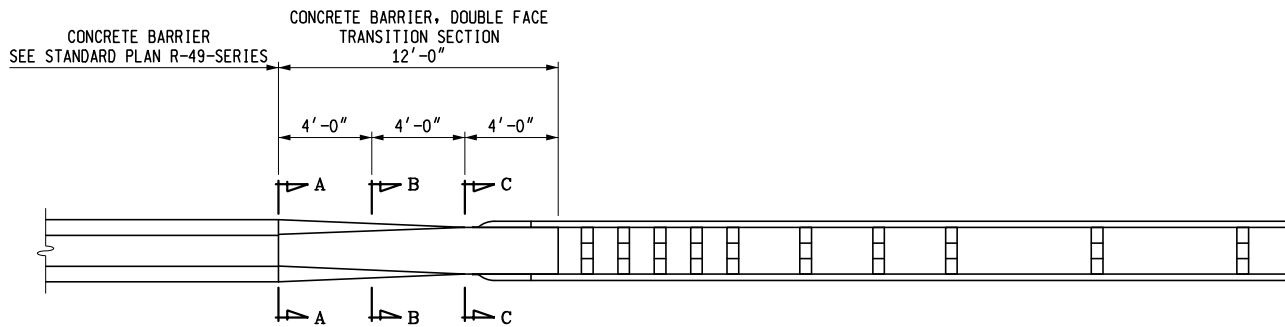


ELEVATION VIEW

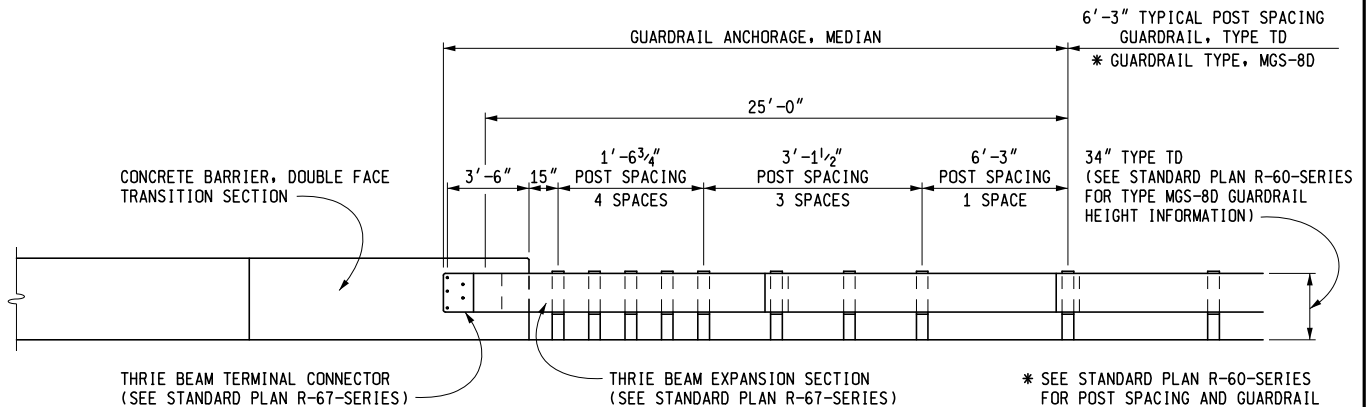

ELEVATION VIEW

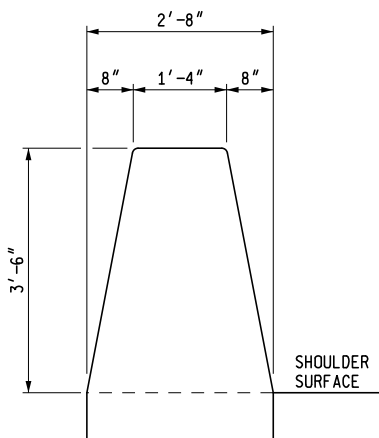


SECTION A-A

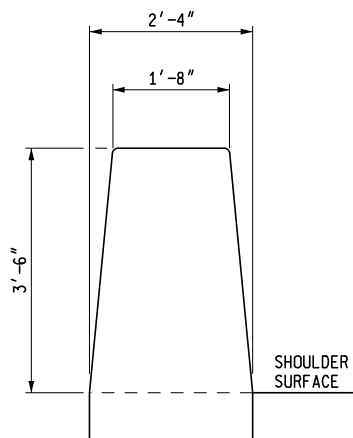

SECTION B-B

UNIFORMLY TRANSITION THE BARRIER FACES FROM SINGLE SLOPE SHAPE TO VERTICAL WALL

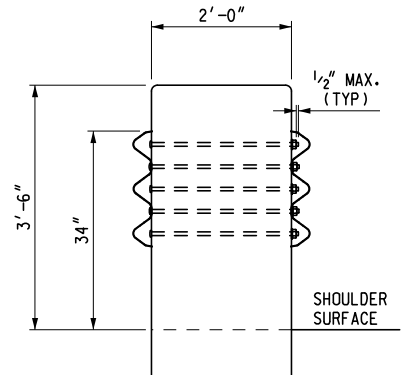

SECTION C-C

HIGH STRENGTH $\frac{1}{8}$ " DIAMETER x 26" LONG HEX HEAD BOLTS WITH 2" MINIMUM THREAD LENGTH AND NUTS WITH ROUND WASHERS FRONT AND BACK SHALL BE USED TO CONNECT GUARDRAIL TO CONCRETE BARRIER, DOUBLE FACE TRANSITION SECTION.

DETAILS FOR CONNECTING GUARDRAIL TO CONCRETE BARRIER, DOUBLE FACE

NOTES:

SEE STANDARD PLANS R-60-SERIES AND R-67-SERIES, FOR DETAILS OF CURRENT GUARDRAIL HARDWARE, AND STANDARD PLAN R-49-SERIES FOR CONCRETE BARRIER.

CONCRETE BARRIER, DOUBLE FACE TRANSITION SECTION SHALL BE INCLUDED IN THE PAY ITEM "CONCRETE BARRIER, DOUBLE FACE, TYPE __".



PREPARED
BY
DESIGN DIVISION

DRAWN BY: B.L.T.

CHECKED BY: W.K.P.

DEPARTMENT DIRECTOR
Kirk T. Steudle

APPROVED BY: Kimberly Avery
DIRECTOR, BUREAU OF FIELD SERVICES

APPROVED BY: Bradley C. Wiefelrich
DIRECTOR, BUREAU OF DEVELOPMENT

MICHIGAN DEPARTMENT OF TRANSPORTATION
BUREAU OF DEVELOPMENT STANDARD PLAN FOR

GUARDRAIL ANCHORAGE, MEDIAN

3-29-2018
F.H.W.A. APPROVAL

3-22-2017
PLAN DATE

R-71-C

SHEET
1 OF 1