


\* MOVEMENT RATING 4"

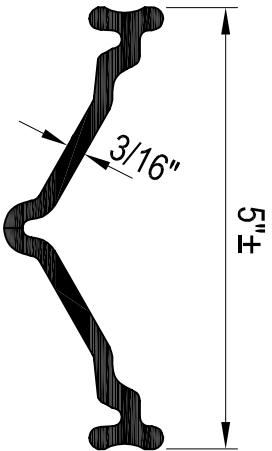

DIMENSIONS @ 60° F		
MODEL	A	B
40SS	2"	2 1/2"

TEMPERATURE ADJUSTMENT						
MODEL	40° F	50° F	60° F	70° F	80° F	90° F
40SS	2 1/2"	2 1/4"	2"	1 3/4"	1 1/2"	1 1/4"

**STRUCTURAL RUBBER PRODUCTS COMPANY**

2245 So. 9th St.  
P.O. Box 2439  
Springfield, Illinois

217-753-2960  
www.strupco.com

DRAWN: 10/17/2008