


PLAN OF FRAME

SECTION A - A

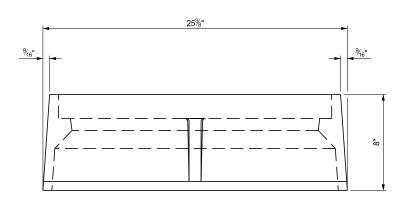

ELEVATION

APPROVED BY:

DIRECTOR, BUREAU OF FIELD SERVICES

MI

APPROVED BY:

DIRECTOR, BUREAU OF DEVELOPMENT

Michigan Department of Transportation


DEPARTMENT DIRECTOR
BRADLEY C. WIEFERNCH, PE

STANDARD PLAN FOR COVER W


 SPECIAL DETAIL
 04/14/2025

 FHWA APPROVAL
 PLAN DATE


R-23-F SHEET 1 OF 3

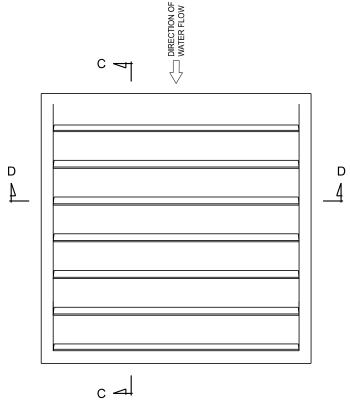

PLAN OF GRATE

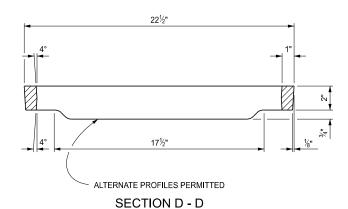

GRAY IRON CASTING

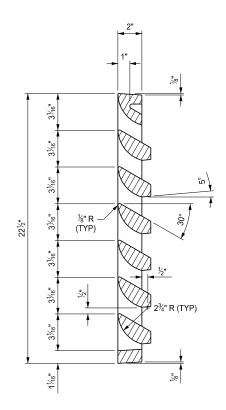

SECTION C - C




STANDARD PLAN FOR
COVER W


SPECIAL DETAIL 04/14/2025
FHWA APPROVAL PLAN DATE

R-23-F

SHEET


2 OF 3

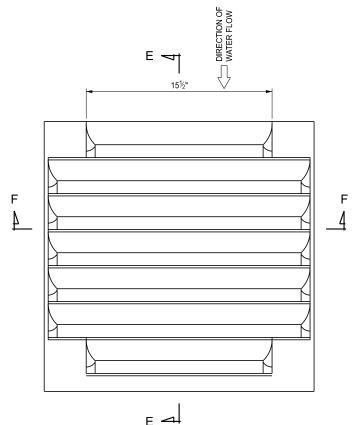

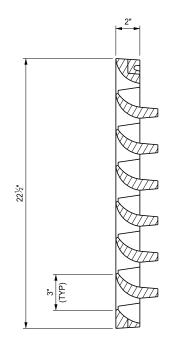

PLAN OF GRATE

SECTION E - E

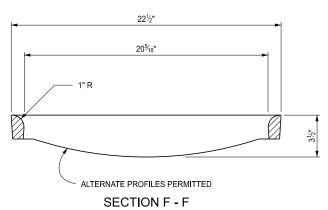

DUCTILE IRON CASTING

NOTES:

ENSURE THE CASTINGS MEET THE REQUIREMENTS OF THE STANDARD SPECIFICATIONS FOR CONSTRUCTION FOR GRAY IRON OR DUCTILE IRON CASTINGS.

CLEAN ALL CASTINGS BY CURRENT APPROVED BLASTING METHODS.

ENSURE CASTINGS ARE FREE OF POURING FAULTS, BLOW HOLES, CRACKS, AND OTHER IMPERFECTIONS. ENSURE CASTINGS ARE SOUND, TRUE TO FORM AND THICKNESS, CLEAN AND NEATLY FINISHED, AND COATED WITH COAL TAR PITCH VARNISH.

GRIND OR MACHINE THE SEATING FACE OF GRATE AND THE SEAT FOR THE SAME ON THE FRAME SO THAT THE GRATE WILL HAVE AN EVEN BEARING ON ITS SEAT TO PREVENT ROCKING OR TILTING.

THIS COVER IS DESIGNED TO FIT ON ANY INLET, CATCH BASIN, OR ON ANY EXISTING SIMILAR STRUCTURE WHEN SO DESIGNATED ON THE PLANS.

GRATE MAY BE PROVIDED WITH BOLTING CAPABILITY. PROVIDE (4) COUNTER BORED HOLES, ONE AT EACH CORNER OF THE GRATE AND A FRAME WITH (4) THREADED HOLES TO SUFFICIENTLY RECEIVE GRATE BOLTS. ENSURE HOLE DIAMETERS AND BOLTS CONFORM TO THE MANUFACTURER'S DETAILS AND SPECIFICATIONS.

Michigan Department of Transportation	STANDARD PLAN FOR COVER W			
DEPARTMENT DIRECTOR	(SPECIAL DETAIL)	04/14/2025	R-23-F	SHEET
BRADLEY C. WIEFERICH, PE	FHWA APPROVAL	PLAN DATE	1\-23-1	3 OF 3