


ELEVATION VIEW

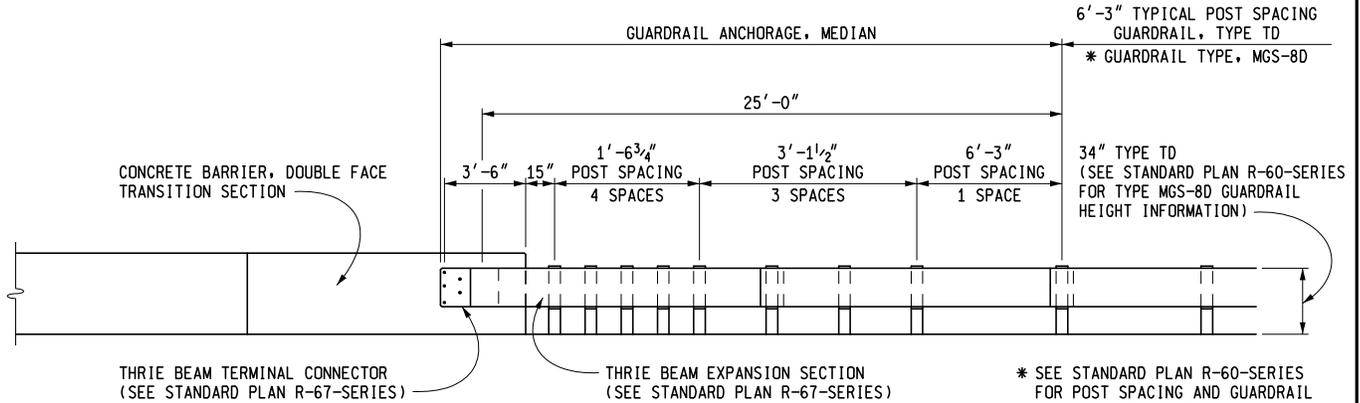


ELEVATION VIEW


6'-3" TYPICAL POST SPACING
 GUARDRAIL, TYPE TD
 * GUARDRAIL TYPE, MGS-8D

34" TYPE TD
 (SEE STANDARD PLAN R-60-SERIES
 FOR TYPE MGS-8D GUARDRAIL
 HEIGHT INFORMATION)

* SEE STANDARD PLAN R-60-SERIES
 FOR POST SPACING AND GUARDRAIL
 LAYOUT TO TRANSITION FROM
 GUARDRAIL, TYPE MGS-8D TO
 GUARDRAIL ANCHORAGE, MEDIAN.

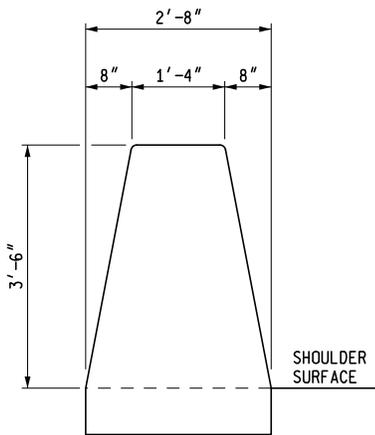


SECTION A-A

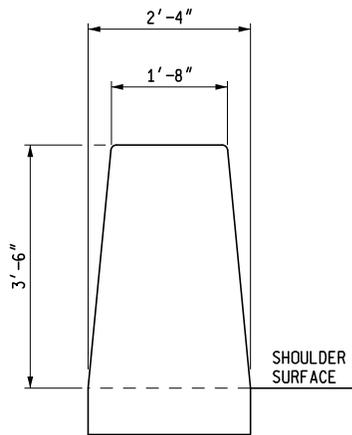

SECTION B-B

UNIFORMLY TRANSITION THE BARRIER FACES
 FROM SINGLE SLOPE SHAPE TO VERTICAL WALL

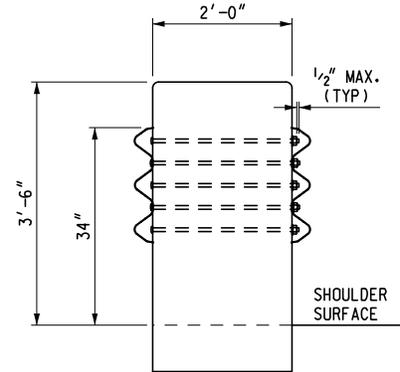

SECTION C-C

HIGH STRENGTH 1/8" DIAMETER x 26" LONG HEX HEAD
 BOLTS WITH 2" MINIMUM THREAD LENGTH AND NUTS WITH
 ROUND WASHERS FRONT AND BACK SHALL BE USED TO
 CONNECT GUARDRAIL TO CONCRETE BARRIER, DOUBLE FACE
 TRANSITION SECTION.

DETAILS FOR CONNECTING GUARDRAIL TO CONCRETE BARRIER, DOUBLE FACE

NOTES:

SEE STANDARD PLANS R-60-SERIES AND R-67-SERIES, FOR DETAILS OF
 CURRENT GUARDRAIL HARDWARE, AND STANDARD PLAN R-49-SERIES FOR
 CONCRETE BARRIER.

CONCRETE BARRIER, DOUBLE FACE TRANSITION SECTION SHALL BE INCLUDED
 IN THE PAY ITEM "CONCRETE BARRIER, DOUBLE FACE, TYPE __".



PREPARED
 BY
 DESIGN DIVISION

DRAWN BY: B.L.T.

CHECKED BY: W.K.P.

DEPARTMENT DIRECTOR
 Kirk T. Steudle

APPROVED BY: Kimberly Avery
 DIRECTOR, BUREAU OF FIELD SERVICES

APPROVED BY: Bradley C. Wieferich
 DIRECTOR, BUREAU OF DEVELOPMENT

MICHIGAN DEPARTMENT OF TRANSPORTATION
 BUREAU OF DEVELOPMENT STANDARD PLAN FOR

GUARDRAIL ANCHORAGE, MEDIAN

3-29-2018
 F.H.W.A. APPROVAL

3-22-2017
 PLAN DATE

R-71-C

SHEET
 1 OF 1